

CEU

Project Name:	
Type:	



APPLICATION

Ideal for commercial where economy, appearance and the ultimate ease of installation and maintenance are desired. A combination exit and emergency incandescent lighting unit in one clean, low-profile modern design.

FEATURES:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face rounded corner design.
- EZ snap-out Chevron directional indicators.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

MOUNTING:

- EZ-snap thermoplastic mounting canopy included -provides top or end mount.
- Universal knockout pattern on back plate for wall mount.

ELECTRICAL:

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.

LAMPS:

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5 watt white LED per lamp head.

BATTERY:


- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTIONS:

- RC: Remote capacity of up to 1.0 watts.
- SPV: UL Listed for 208/220/240 Volt, 50/60 Hz.
- HL: Provides increased center-to-center spacing (2.0W per head).

LISTING:

- One year warranty on all electronics and housing. Battery prorated for one year.
- UL Listed for damp locations (0°C - 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

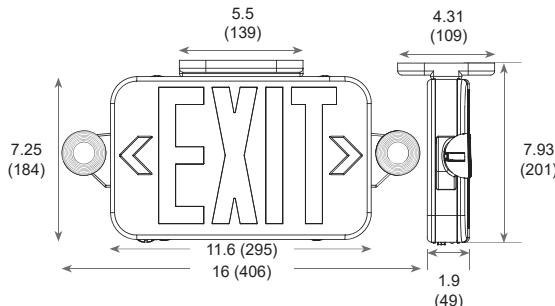

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: CEU-3-R-W-SPV-HL

MODEL	# OF FACE	LETTER	HOUSING COLOR	OPTIONS
CEU	3	Universal Single/Double Face	RG Red/Green field selectable	W White B Black RC Remote Capacity ¹ SPV 208/220/240 Volt, 50/60Hz HL High Lumens ¹ WG-3 Steel Wire Guard (13.5" x 30" x 6")

NOTES:

1. -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option.