

# VR8 LED

|               |  |
|---------------|--|
| Project Name: |  |
| Type:         |  |



## CASAMBI

### APPLICATION

The heavy-duty turret industrial channel is a strip with reflectors to focus the majority or all of the illumination downward. The series incorporate sturdy reflectors that precisely direct and effectively control light. It is a durable, efficient solution for both task and general lighting needs. Its functionality and economy make it an ideal choice for large storage areas, institutions, industrial and retail applications.

### FEATURES:

- Heavy-duty design for demanding industrial environments.
- Die-formed CRS housing with rolled symmetric reflector and driver cover.
- Die-formed steel reflectors, painted white.
- Knock-outs for versatile configuration and simple mounting.
- Easily assembled with snap together components and no extra tools required.
- Acrylic diffuser.
- Finish in highly reflective post painted finish.
- Optional wire guards with snap-on clips available.
- Paint after fabrication.

### MOUNTING:

- For surface, pendant, chain, swivel stem, unit or row installation.
- For mounting heights up to 25' that require high light levels.

### LED:

- High quality array LEDs.
- Color Temperature: 3000/3500/4000/5000 (K)
- Color Rendering Index: > 82.8 (optional >90).
- Calculated L70: 122,000 hours
- Reported L70: +60,000 hours

### ELECTRICAL:


- High power factor electronic driver, operate from a 120 ~ 277 Vac input range, 50 / 60 Hz.
- Features included over voltage protection, surge, short circuit protection and over load protection.
- Power Factor: typical > 0.95, THD <20, meets Class1 or Class2 circuit.
- Generic : 0-10V 10% dim. (GR)
- Operating temperature: -4°F (-20°C) ~ 122°F (50°C).
- <ELCU-200>
- Guarantees emergency lighting remains ON or is turned on when power to the control device is lost.
- Interfaces with fire alarm panel or security system.
- "Watchdog" feature allows emergency loads to be controlled in tandem with normal power loads.
- UL listed for use in emergency circuits.

### LISTING:

- UL/CUL listed.
- DLC listed.<sup>12</sup>
- Listed to UL 1598 and UL 8750.
- Suitable for damp locations.
- Optional ARRA compliant.
- 5 years warranty.
- 7 or 10 years limited warranty. (optional)<sup>6</sup>
- Bluetooth Mesh System available, please contact factory for more information.

### CONFIGURATIONS

| Series | Size | Model# | AC Input | Lumen Output | Lumen Efficiency |
|--------|------|--------|----------|--------------|------------------|
| VR8    | 4FT  | 25LED  | 25W      | 3386.5 lm    | 135.46 lm/W      |
|        |      | 36LED  | 36W      | 4876.6 lm    |                  |
|        |      | 45LED  | 45W      | 6095.7 lm    |                  |
|        |      | 54LED  | 54W      | 7314.8 lm    |                  |
|        |      | 72LED  | 72W      | 9753.1 lm    |                  |

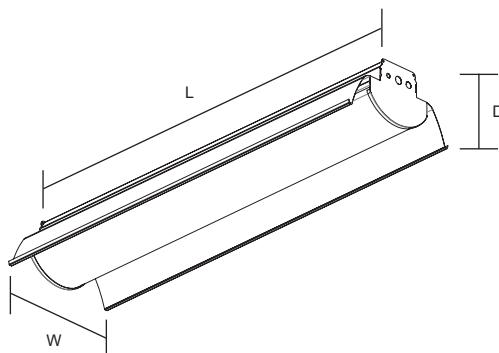

#### Specifications: VR8

Length: 48 (1219)  
Width: 14-5/8 (371)  
Depth: 7 (178)

All dimensions are in inches (millimeters).

## VR8 LED

## ORDERING INFORMATION

EXAMPLE: VR8-4-45LED-50K-UNV

| MODEL | LENGTH    | LED   |         | COLOR TEMP. |              | EFFICACY   |  | CRI        |                    | REFLECTOR |                     |
|-------|-----------|-------|---------|-------------|--------------|------------|--|------------|--------------------|-----------|---------------------|
| VR8   | 4' Length | 25LED | 25W LED | -30K        | 3000K        | (Blank) HE | Standard High Efficacy  | (Blank) C9 | 80+ CRI<br>90+ CRI | (Blank)   | Solid Top Reflector |
| 120   | 120V      | 36LED | 36W LED | -35K        | 3500K        |            |  |            |                    |           |                     |
| 277   | 277V      | 45LED | 45W LED | -40K        | 4000K (Std.) |            |  |            |                    |           |                     |
| 347   | 347V      | 54LED | 54W LED | -50K        | 5000K        |            |  |            |                    |           |                     |
|       |           | 72LED | 72W LED |             |              |            |  |            |                    |           |                     |

| VOLTAGE |          | MOUNTING  |  | LED DRIVER |  |       |   |  |  |  |  |
|---------|----------|-----------|--|------------|--|-------|---|--|--|--|--|
| UNV     | 120-277V | (Blank)   | Ceiling Surface Mount                                  | GR         | Generic, 0-10V 10% dim (Std.) <sup>7</sup>                       | ES566 | eldoLED SOLOdrive Natural Dimming to dark, 0-10V, 100% ~ 0.1% dim   |  |  |  |  |
| 120     | 120V     | SH-1/2-XX | 1/2" IPS STEM w/ Canopy (* xx = 18, 24, 36, 48 inches) | DM1        | Generic 0-10V 1% dim   | LDE1  | Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology, 100% ~ 1% dim                                       |  |  |  |  |
| 277     | 277V     |           |  | SD40       | 40% / 100% Bi-Level Step dim                                     | ELV   | ELV compatible (reverse-phase or trailing-edge), (120V only)  |  |  |  |  |
| 347     | 347V     |           |  | SDXX       | XX% / 100% Bi-Level Step dim (Specify XX : 10% ~ 70%)            | PHSR  | Philips Xitanium Sensor-Ready, Dali 5%~100% dim   |  |  |  |  |
|         |          |           |  | TDM        | Triac Dim. (120V only)   | PHDL  | Philips Xitanium DALI driver, Dim to 5%   |  |  |  |  |
|         |          |           |  | TD30/70    | 30% / 70% / 100% Tri-Level Step dim                              | TRIOT | Tridonic IoT ready, 1-100% dim via Smart Module Interface (SMI), automated dimming/lighting controls via Enlighted Sensor Interface |  |  |  |  |
|         |          |           |  | TDXX/YY    | XX% / YY% / 100% Tri-Level Step dim (Specify XX, YY : 10% ~ 70%) | ED560 | eldoLED LightShape DALI dim to dark, 0.1% ~ 100%  |  |  |  |  |
|         |          |           |  | LTEA2W     | Hi-lume 1% 2-wire LED driver (120V forward phase only)           | MU050 | 0-10V dual channel, 0.1% ~ 100%   |  |  |  |  |
|         |          |           |  |            |  | ND    | Driver prewired for non-dimming applications  |  |  |  |  |
|         |          |           |  |            |  | BLT   | Bluetooth Mesh System (contact factory for more information)  |  |  |  |  |

| OPTIONS  |  |           |   |  |  |  |  |  |  |  |  |
|----------|--|-----------|---|--|--|--|--|--|--|--|--|
| EMG8     | 1296 LUMEN EM Battery Backup (CEC Compliant EM) <sup>2,8</sup> | O7W       | Optional 7 Years Limited Warranty <sup>6</sup>                                    |  |  |  |  |  |  |  |  |
| EMG15    | 2430 LUMEN EM Battery Backup (CEC Compliant EM) <sup>2,8</sup> | O10W      | Optional 10 Years Limited Warranty <sup>6</sup>                                   |  |  |  |  |  |  |  |  |
| EMG20    | 3240 LUMEN EM Battery Backup (CEC Compliant EM) <sup>2</sup>   | ELCU-200  | Fail-to-on Emergency lighting, UL924 <sup>9</sup>                                 |  |  |  |  |  |  |  |  |
| EMG25    | 4050 LUMEN EM Battery Backup (CEC Compliant EM) <sup>2,8</sup> | DPMS      | Daylight Dimming Photosensor (0-10 VDC Control) <sup>4</sup>                      |  |  |  |  |  |  |  |  |
| EMSD     | Self-Diagnostic Emergency Battery <sup>1,2</sup>               | AMS       | Bluetooth Mesh Wireless Sensor. Occupancy/Daylight/0-10V Dimming <sup>4, 13</sup> |  |  |  |  |  |  |  |  |
| GTD      | GTD Bodine Generator Transfer Device                           | LSR-301-S | Setup Remote Control for DPMS   |  |  |  |  |  |  |  |  |
| GTD10DIM | Bodine Generator Transfer Device (0-10VDC Dimmer Override)     | LSR-301-P | Occupant Remote Control for DPMS  |  |  |  |  |  |  |  |  |
| GLR      | Fast Blow Fuse <sup>3</sup>                                    | MS        | Motion Sensor   |  |  |  |  |  |  |  |  |
| WGT      | Wireguard  | ARRA      | Assembled in USA for Buy American Act   |  |  |  |  |  |  |  |  |
| SSH      | Swivel Stem Hanger <sup>4</sup>                                | AMB       | Anti-Microbial Coating (Matte Skye White)   |  |  |  |  |  |  |  |  |
| CH       | Chain Hanger <sup>4,5</sup>                                    | HT        | High Temperature (-31°F (-35°C) ~ 140°F (60°C))                                   |  |  |  |  |  |  |  |  |
|          |  | HC403     | Microwave bi-level Occupancy Sensor, adjustable via DIP switch <sup>11</sup>      |  |  |  |  |  |  |  |  |

| LIGHTING CONTROL SYSTEM |   |  |  |  |  |  |  |  |  |  |  |
|-------------------------|---|--|--|--|--|--|--|--|--|--|--|
| PPA102S                 | <Bluetooth>   |  |  |  |  |  |  |  |  |  |  |
|                         | Bluetooth Powerpack (Consult factory for installation location) |  |  |  |  |  |  |  |  |  |  |
| CASAMBI                 | Contact factory for CASAMBI READY options                       |  |  |  |  |  |  |  |  |  |  |

## NOTES:

- Emergency Ballast options, specify voltage.
- Check with factory for more details. Must specify voltage, not available with 347V.
- Must specify voltage, not available with 347V.
- Standard length 24", specify length in inches. (24, 36, 48, 60, 72, 96" L)
- Chain hangers come with V hook.
- This limited warranty covers electrical parts only and does not apply to labor, equipment lease, or defect from improper installation or operation. (EM battery backup not included)
- To find an approved dimmer switch, please see table 1.
- For 2' length, only EMG5 and EMG8 are available.
- Shipped separately.
- Not available with Non Lens option (NLE).
- See Table2 to find factory setting.
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.
- With TDM/ELV/SDxx/TDxx: Only available with line-voltage on/off occupancy sensor.

## VR8 LED

COMPATIBLE DIMMER SWITCH (TABLE 1)

| Model #           | Brand   | Compatible Dimmer Switch |   |
|-------------------|---|--------------------------|---|
| PH                | Philips Xitanium                                  | <Leviton>                | IP710-LFZ   |
|                   |   | <Lutron>                 | Nova: NFTV-dimmer plus PP-DV relay pack(s)<br>Nova T: NTSTV-DV-dimmer<br>Diva: DVTV-dimmer, DVSCTV-dimmer, plus PP-DV, relay pack(s), DVSTV-dimmer, DVSCSTV-dimmer<br>GRAFIK Eye QS: QSGRJ-XP, plus GRX-TVI 0-10V interface<br>GRAFIK Eye QS w/EcoSystem: QSGRJ-XE, QSGR-XE, plus GRX-TVI 0-10V interface<br>PowPak: RMJ-5T   |
| OS, OS1           | Osram Optotronic                                  | <Osram>                  | ZBHA-CLM DIM (NAMED: 45678), 45561 - LC-SL3W-TVWBX/UNV  |
|                   |   | <Encelium EMS>           | EN-LCM-1R10V-GB2-BK, EN-LCM-1R10V-GB2-BK/DR,<br>EN-ALC-1R10V-GB2-BK, EN-ALC-1R10V-GB2-BK-DR   |
|                   |   | <Leviton>                | IP710-DLX   |
|                   |   | <Lutron>                 | DVTV-XX   |
|                   |   | <Wattstopper>            | ADF-120277, FD-301, FSP-202   |
|                   |   | <Synergy>                | ISD BC  |
| ES566             | eldoLED SOLOdrive                                 | <Busch-Jaeger>           | 2112U-101   |
|                   |   | <Jung>                   | 240-10  |
|                   |   | <Leviton>                | IllumaTech - IP710-DLX  |
|                   |   | <Lightoller Controls>    | ZP600FAM120   |
|                   |   | <Merten>                 | 5729  |
|                   |   | <Pass & Seymour>         | CD4FB-W   |
|                   |   | <Wattstopper>            | DCLV1   |
|                   |   | <Sensor Switch>          | nIO EZ  |
|                   |   | <Synergy>                | ISD BC  |
|                   |   | <ABB>                    | SD/S 2.16.1   |
|                   |   | <Lutron>                 | Nova T: NTFTV<br>Diva - DVTV-xx, NFTV<br>GRAFIK Eye: GRX-TVI w GRX3503<br>Energy Savr Node: QSN-4T16-S<br>TVM2 Module   |
|                   |   | <Crestron>               | GLX-DIMFLV8, GLXP-DIMFLV8, GLPAC-DIMFLV4-*, GLPAC-DIMFLV8-*, GLPP-DIMFLVEX-PM,<br>GLPP-1DIMFLV2EX-PM, GLPP-1DIMFLV3EX-PM, DIN-AO8, DIN-4DIMFLV4, CLS-EXP-DIMFLV,<br>CLCI-1DIMFLV2EX   |
| LDE1              | Lutron 5-Series EcoSystem                         | <Lutron>                 | PowPak Dimming Modules: RMJ-ECO32-DV-B, FCJ/FCJS-ECO <sup>1,2</sup><br>Energi Savr Node (120V only): QSN-1EC0-S, QSN-2EC0-S<br>GRAFIK Eye QS/Homeworks QS control unit (120V only): QSGRJ-_E(wireless) QSGR-_E<br>Quantum Hub (120V only): QP2-_2C/4C/6C/8C<br>Homeworks QS/myRoom Plus power module (120V only): LQSE-2ECO-D |
| MU050             | Moons Intelligent Indoor                          | <Lutron>                 | Diva - DVTV-xx, DVSTV-xx  |
| PHSR <sup>3</sup> | Philips Xitanium Sensor-Ready                     | <Illumra>                | <u>Single Rocker Self-Powered Light Switch (on/off, dim-up/down)</u><br>Illumra# ZBT-S1AWH<br>Digi-Key# 1082-1033-ND  |
|                   |   |                          | <u>Dual Rocker Self-Powered Light Switch (on/off, dim-up/down, scene1,2)</u><br>Illumra# ZBT-S2AWH<br>Digi-Key# 1082-1034-ND  |
| TDM               | KEYSTONE  | <Lutron>                 | Diva DV-600P, SkyLark S-600P, Ariadni AY-600P, Ariadni TG-603P, Maestro MA-600 (Digital),<br>Diva CFL/LED DVCL-153P, Satin Colors DVSC-600P-SW  |
|                   |   | <Leviton>                | 6641, IllumaTech IPI06-1LX, ToggleTouch TGI06-1LW (Digital)   |
| ELV               | KEYSTONE  | <Lutron>                 | MAELV-600BL (Digital), DVELV-300P, SkyLark SELV-300P  |
| LTEA2W            | Lutron Hi-lume 2-wire (120V forward voltage only) | <Lutron>                 | Visit <a href="http://www.lutron.com/TechnicalDocumentLibrary/369543_ENG.pdf">http://www.lutron.com/TechnicalDocumentLibrary/369543_ENG.pdf</a><br>for a list of compatible dimmer switches.  |

## NOTES:

- All devices connected to one FCJ/FCJS-ECO will be controlled together. Devices will dim to the same level as the result of a control command.  
For more detail on adjusting low-end light level refer to Application Note#556 at [www.lutron.com](http://www.lutron.com).
- For the Line/Hot (L/H) terminal on the driver, it is preferred not to use the switched hot (red) wire from the control but rather the hot wire directly from the power source.
- Recommended for EasySense System.


HC403 FACTORY SETTING (TABLE 2)

|                                     |         |
|-------------------------------------|---------|
| Detection Area                      | 100%    |
| Hold-time                           | 5 sec   |
| Daylight sensor                     | Disable |
| Stand-by period (tri-level control) | 10 sec  |
| Stand-by dimming level              | 10%     |


\* See a separate attachment to find more setting options.

## VR8 LED


VR8-25LED

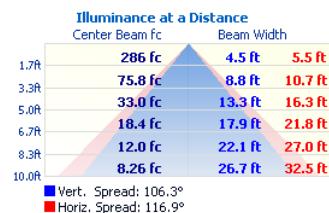


VR8-36LED

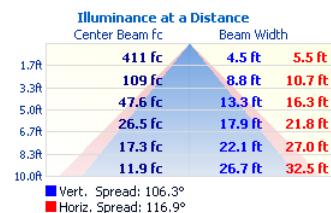


VR8-44LED

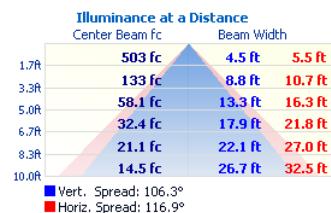


VR8-54LED

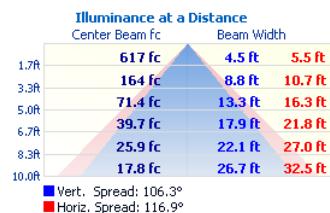


VR8-72LED

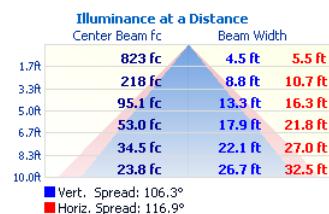

SIDE VIEW

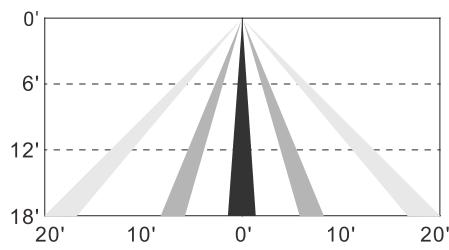

TOP VIEW

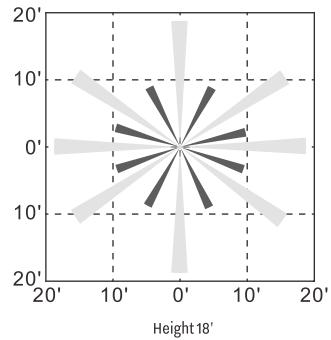

AMS coverage pattern