

USRHLED

Project Name:	
Type:	

**FEATURES:**

- Durable 20-gauge steel housing.
- High performance chrome-plated metalized reflector and glass lens for optimal light distribution.
- Long lasting, efficient, ultra bright white LED heads.
- Adjustable heads increase center-to-center spacing.

MOUNTING:

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Suitable for wall or ceiling mount.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

ELECTRICAL:

- Powered from low voltage power source with low voltage wiring (not provided).

LISTING:


- UL listed with compatible product listed in the chart.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- 5 years limited warranty.
- NFPA 70 compliant.

COMPATIBILITY CHART

* Reference individual unit equipment specification sheets for remote load capacity availability.

Model	6V
EM1-HO*	V
R-16HO*	V
LEDCAEM	V
EXL-RC*	V
CXTE-RC*	V
NYDXR-27-RC	V
CADXR-650/6100	V

* SDT versions of the fixtures are not compatible with remote heads.

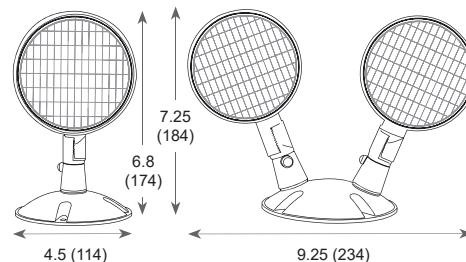

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: USRHLED-1-6V

MODEL	HEADS		COLOR		VOLTAGE		WATTAGE ¹	
USRHLED	1	Single Head	(Blank)	Off White Housing	6V	6VDC	(Blank)	5.3 Watts

NOTES:

1. Wattage rating stated per head.