



# CUBE2, CUBE4 RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS

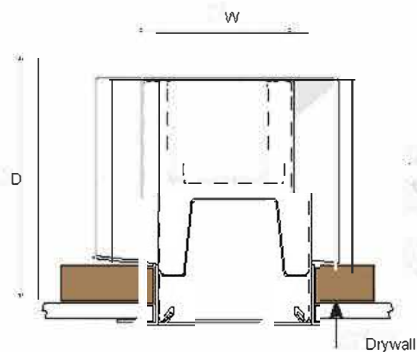

## Specifications CUBE2

Width 2.5 (64)  
Depth 4 (101)

All dimensions are in inches (millimeters).

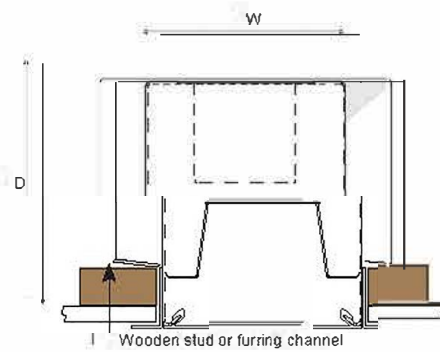


## Specifications CUBE4

Width 4 (101)  
Depth 4 (101)

All dimensions are in inches (millimeters).

## PART LIST

- A: LED module plate
- B: Lens
- C: BX cable connector
- D: Access plate
- E: Safety bracket screw
- F: Safety bracket

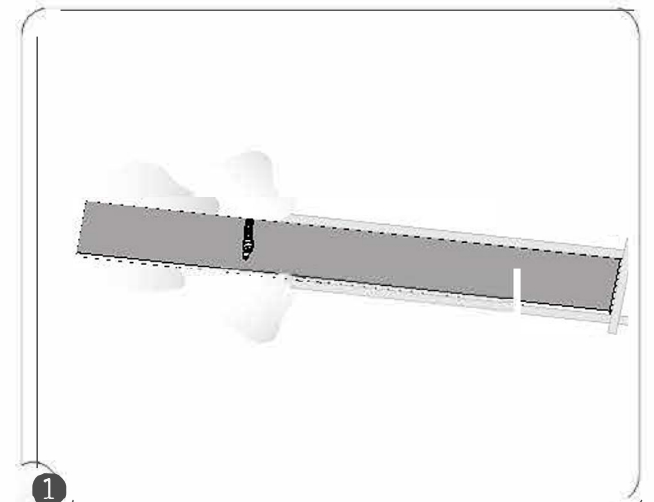

1


Make an opening on Drywall according to the dimensions.

### CUBE2

(2ft) : 24-3/16" x 2-5/8"  
(3ft) : 36-3/16" x 2-5/8"  
(4ft) : 48-3/16" x 2-5/8"  
(6ft) : 72-3/16" x 2-5/8"  
(8ft) : 96-3/16" x 2-5/8"


### CUBE4

(2ft) : 24-3/16" x 4-1/8"  
(3ft) : 36-3/16" x 4-1/8"  
(4ft) : 48-3/16" x 4-1/8"  
(6ft) : 72-3/16" x 4-1/8"  
(8ft) : 96-3/16" x 4-1/8"

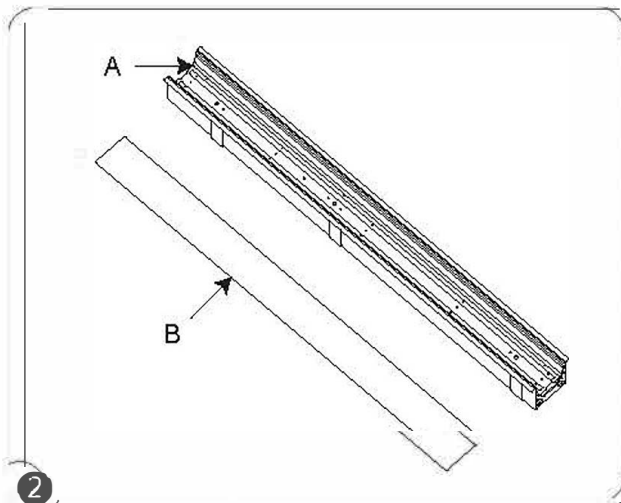


2

Remove Lens(B) and LED module plate(A)

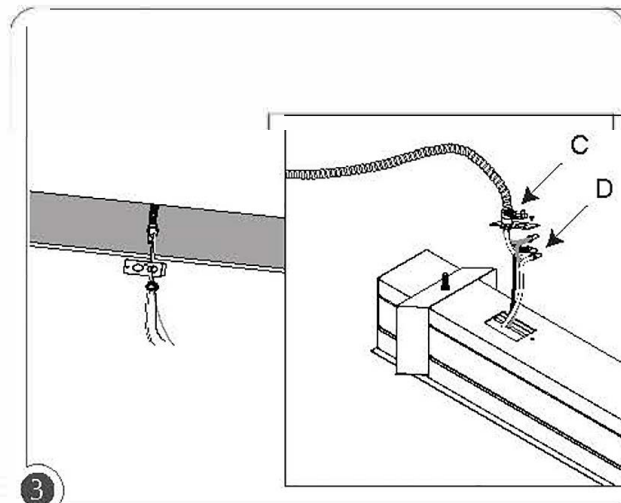

3

Install BX cable connector(C) to access plate(D) Wire BX cable wires to Fixture wires

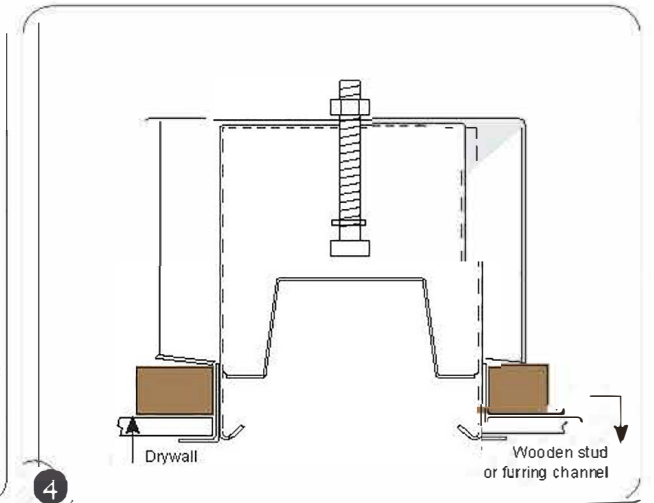

4

Align fixture to pre-cut hole on drywall and insert fixture




866-471-7711  
utopialighting.com  
info@utopialighting.com

## WARNING:




RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


# CUBE2, CUBE4 RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS

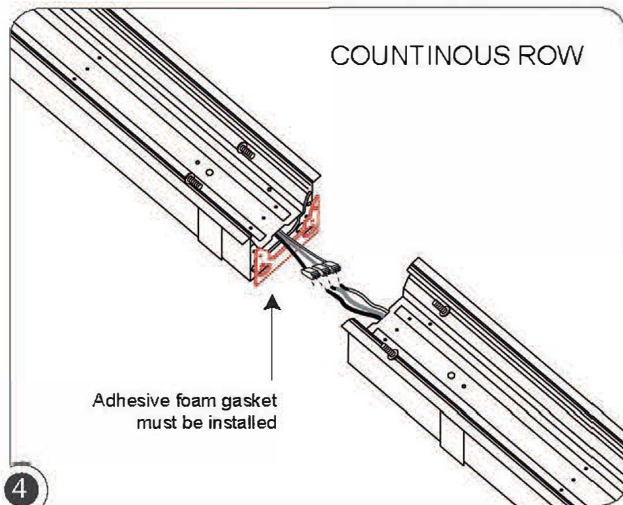

4 Refer to [4A] on the next page for detailed installation instructions.

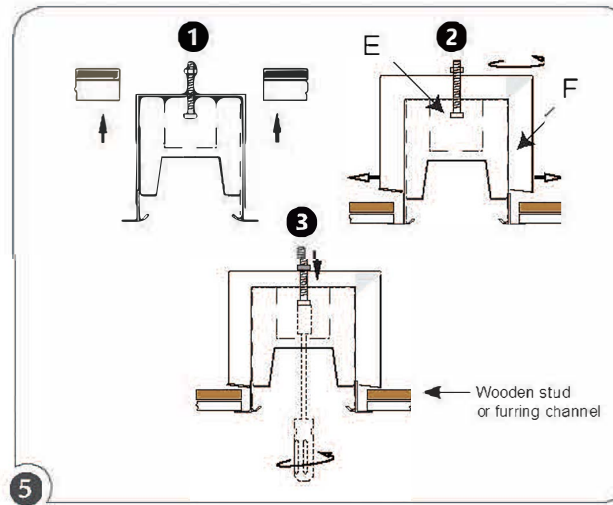

5 Push safety bracket screw(E) up to Rotate safety brackets(F) once bracket is correctly align tighten screw to lock fixture in to drywall ceiling.

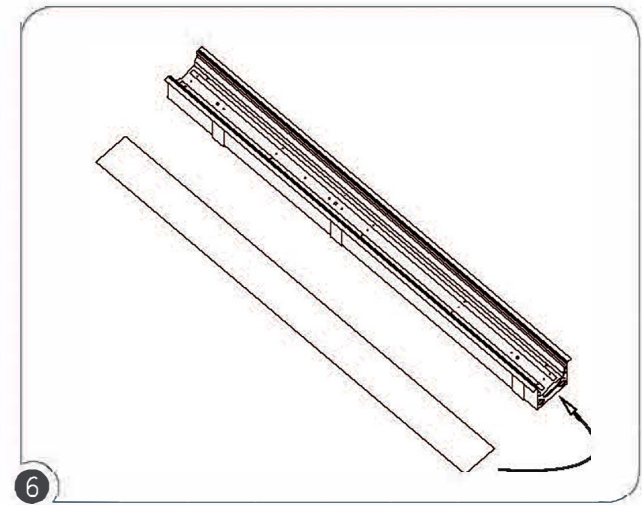

6 Reinstall LED module plate and lens.



866-471-7711  
utopialighting.com  
info@utopialighting.com

Contractor is responsible for adequately reinforcing ceilings to support luminaire weight. Utopia Lighting accepts no responsibility for inadequately reinforced ceilings. The information contained in this drawing is the sole property of Utopia Lighting. Any reproduction in part or whole is prohibited and warranty voided.



**WARNING:** RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


# CUBE2, CUBE4 RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS

## CONTINUOUS ROW

### TOOL(S) NEEDED:


Option 1) Cordless drill and an elbow or L-shape adapter with Philips Insert Bit extension.

Option 2) Flexible Screwdriver with Philips Insert Bit.



### Continuous Row

Align continuous row fixtures in numerical order under the same alphabet family.

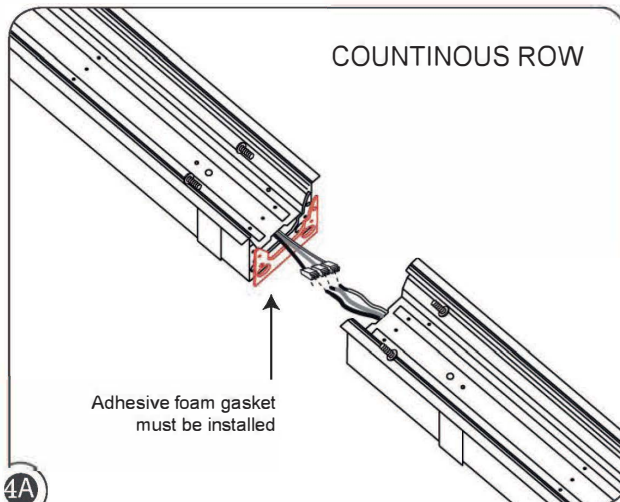

- 4A
- 1) Make wiring connection from each fixture power supply wires together.
  - 2) Align fixtures and screw together with 4 screws(H).



866-471-7711  
utopialighting.com  
info@utopialighting.com

Contractor is responsible for adequately reinforcing ceilings to support luminaire weight. Utopia Lighting accepts no responsibility for inadequately reinforced ceilings. The information contained in this drawing is the sole property of Utopia Lighting. Any reproduction in part or whole is prohibited and warranty voided.

### WARNING:



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.