

## LSP



## CASAMBI

## APPLICATION

The design of the panels produces even, consistent shadowless light. The LEDs enable long life, high lumen maintenance, and are low maintenance and constructed without hazardous materials. The LED panel series is designed to lay in drop ceilings in office, schools, and healthcare applications.

Project Name:	
Type:	

## FEATURES:

- The external driver ensures steady performance and long lifetime.
- Aluminum with white powder coated finish.
- Slim profile and low weight design.
- White finished.
- Impact resistant frosted lens.

## LED:

- Color Temperature: 3500/4000 (K).
- LED Module: High efficiency up to 125 LPW.
- CRI: Ra>80.
- Service life: Greater than 100,000 hours minimizing maintenance frequency.
- LM79.
- LM80.

## ELECTRICAL:

- High power factor electronic driver, operate from a 120~277 Vac input range, 50 / 60 Hz.
- Short circuit protection.
- 0-10V Dimming. (1%-100%, 5%-100%).
- To find an approved dimmer switch, please see table1.
- Power Factor: >0.9
- THD: <20%
- Ambient Operating Temperature: -4°F (-20°C) ~ 122°F (50°C).
- <ELCU-200>
- Guarantees emergency lighting remains ON or is turned on when power to the control device is lost.
- Interfaces with fire alarm panel or security system.
- “Watchdog” feature allows emergency loads to be controlled in tandem with normal power loads.
- UL listed for use in emergency circuits.

## LISTING:

- UL listed.
- UL 1598 suitable for damp locations, Type IC.
- UL 8750 LED equipment in lighting products.
- 5 year warranty.
- Suitable for damp location, Type IC.
- RoHS.
- 100,000+ hours per L70 TM-21 at 158°F (70°C).
- ARRA compliant (optional).
- BAA compliant (optional).
- Bluetooth Mesh System available, please contact factory for more information.

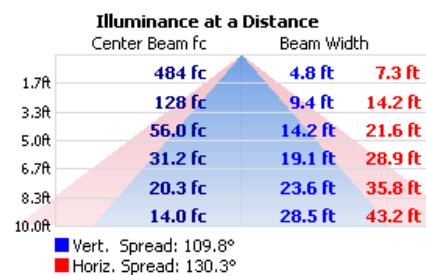
## CONFIGURATIONS

Size	LED Watts	Lumen Output	Lumen Efficiency
2' x 2'	36W	4500 lm	125 lm/W
2' x 4'	46W	5450 lm	

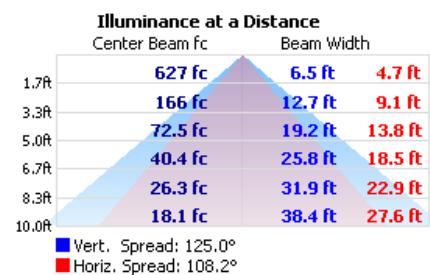
## CUSTOMIZE

Size	Max LED Watts
2' x 2'	36W
2' x 4'	65W

## LSP-22-36LED



## LSP-24-46LED



## ORDERING INFORMATION

EXAMPLE: LSP-22-36LED-40K-UNV-DM

MODEL	SIZE		LED		COLOR TEMP.		MOUNTING		VOLTAGE		
LSP	22	2' x 2'	36LED	36W LED	-35K -40K	3500K 4000K	(Blank) FK SMK AC66	Recessed T-bar Flange Kit for Hard Ceiling <sup>1</sup> Surface Mount Kit 66" Aircraft Cable <sup>3</sup>		UNV	120-277V
	24	2' x 4'	46LED	46W LED				* Contact factory for custom wattage or lumen requirement.			


LED DRIVER			DIFFUSER		OPTIONS		
DM	0-10V 5%~100% (Std.)		(Blank)	Satin White (Std.)	EMI15	1875 LUMEN EM Battery Backup	
DM1	0-10V 1%~100%		A12	Pattern#12 prismatic acrylic lens with overlay	EMI25	3125 LUMEN EM Battery Backup	
SD40	40% / 100% Bi-Level Step dim				ELCU-200	Fail-to-on Emergency lighting, UL924 <sup>2</sup>	
SDXX	XX% / 100% Bi-Level Step dim (Specify XX : 10% ~ 70%)				GTD	Bodine Generator Transfer Device	
PHSR	Philips Xenium Sensor-Ready, Dali 5%~100% dim.				GTD10DIM	Bodine Generator Transfer Device (0-10VDC Dimmer Override)	
TDM	Triac Dim. (120V only)				AMB	Anti-Microbial Coating (Matte Skye White)	
TD30/70	30% / 70% / 100% Tri-Level Step dim				HC403	Microwave bi-level Occupancy Sensor, adjustable via DIP switch <sup>4,5</sup>	
TDXX/YY	XX% / YY% / 100% Tri-Level Step dim (Specify XX, YY : 10% ~ 70%)				HRC-05	Remote control for HC403 sensor	
LDE5	5-Series EcoSystem LED driver, 100% ~ 5% dim				SP10	Integrated 10kV/10kA surge protection	
LDE1	Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology, 100% ~ 1% dim				ARRA	Assembled in USA for Buy American Act	
ELV	ELV compatible (reverse-phase or trailing-edge), (120V only)				BAA	BAA(Buy American Act) and BABA(Build America Buy America) compliant	
LTEA2W	Hi-lume 1% 2-wire LED driver (120V forward phase only)						
BLT	Bluetooth Mesh System (contact factory for more information)						

LIGHTING CONTROL SYSTEM			FRAME	
VRF	<Lutron Vive System Enabled>		(Blank)	White
FCJS0	Vive Integral fixture control (RF only), (Must be ordered with EcoSystem drivers or PHSR)		CC	Custom Color
FCJSE	Vive Attached fixture control (RF only for 0-10V drivers)			
FCJS0EM	Vive Attached fixture control (RF only for Lutron EcoSystem drivers)			
FCJSEEM	UL 924 Emergency PowPak wireless fixture control for 0-10V drivers			
RMJS8T	UL 924 Emergency PowPak wireless fixture control for Ecosystem drivers			
RMJS8TEM	Vive Attached fixture control (RF only for 0-10V drivers), 0-10V control module 8A switched controls up to 60mA.			
RMJSECO32	UL924 Emergency PowPak wireless fixture control for RMJS8T			
	Vive Attached fixture control (RF only for EcoSystem drivers), ECO control module			
PPA102S	<Bluetooth>			
CASAMBI	Bluetooth Powerpack (Consult factory for installation location)			
CASAMBI	Contact factory for CASAMBI READY options			

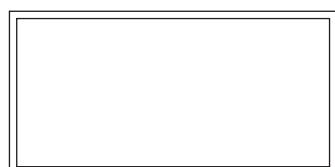
## NOTES:

1. Supplied in separate boxes, field installed.
2. Shipped separately.
3. The whole cable length from ceiling to fixture is 66".
4. See Table 2 to find factory setting.
5. Depth increased up to 3".

&lt;Standard&gt;

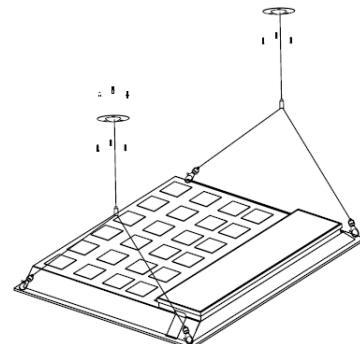
Specifications: LSP 2'x2'

Length: 23-3/4 (603)  
 Width: 23-3/4 (603)  
 Depth: 1-5/8 (41)  
 Depth with Junction box: 2-7/8 (74)  
 \* Depth increased up to 3" with HC403 option.  
 \* Depth increased up to 5.2" (132) with EM option.

Specifications: LSP 2'x4'

Length: 47-5/8 (1209)  
 Width: 23-3/4 (603)  
 Depth: 1-5/8 (41)  
 Depth with Junction box: 2-7/8 (74)  
 \* Depth increased up to 3" with HC403 option.  
 \* Depth increased up to 5.2" (132) with EM option.

All dimensions are in inches (millimeters).

**Pendant Mounting****APPROVED DIMMER SWITCH (Table 1)**

Model#	Brand	Manufacturer	Manufacturer Part #
DM (0-10V 5%~100%)	-	<Leviton>	IllumaTech IP7 series
		<Lutron>	Visit <a href="http://www.lutron.com/advance">www.lutron.com/advance</a> for a list of dimmers (Mark VII) that will work with this driver
		<Philips>	Sunrise: SR1200ZTUNV
		<Easeic>	EID110U
DM1 (0-10V 1%~100%)	-	<Lutron>	Nova: NFTV-dimmer plus PP-DV relay pack(s) Nova T: NTSTV-DV-dimmer Diva: DTV-dimmer, DVSTV-dimmer, plus PP-DV relay pack(s), DVSTV-dimmer, DVSCSTV-dimmer GRAFIK Eye QS: QSGRJ-XP, plus GRX-TVI 0-10V interface GRAFIK Eye QS with EcoSystem: QSGRJ-XE, QSGR-XE, plus GRX-TVI 0-10V interface PowPak: RMJ-5T
			Leviton: IP710-LFZ
			Sunrise: SR1200ZTUNV
			Diva DV-600P, SkyLark S-600P, Ariadni AY-600P, Ariadni TG-603P, Maestro MA-600 (Digital), Diva CFL/LED DVCL-153P, Satin Colors DVSC-600P-SW
TDM	KEYSTONE	<Lutron>	6641, IllumaTech IPI06-1LX, ToggleTouch TGI06-1LW (Digital)
		<Lutron>	MAELV-600BL (Digital), DVELV-300P, SkyLark SELV-300P
LDE1	Lutron Hi-lume 1% EcoSystem	<Lutron>	PowPak Dimming Modules: RMJ-EC032-DV-B, FCJ/FCJS-ECO Energi Savr Node (120V only): QSN-1EC0-S, QSN-2EC0-S
LDE5	Lutron 5-Series EcoSystem		GRAFIK Eye QS/Homeworks QS control unit (120V only): QSGRJ-_E(wireless) QSGR-_E Quantum Hub (120V only): QP2-_2C/4C/6C/8C Homeworks QS/myRoom Plus power module (120V only): LQSE-2ECO-D
LTEA2W	Lutron Hi-lume 2-wire (120V forward voltage only)	<Lutron>	Visit <a href="http://www.lutron.com/TechnicalDocumentLibrary/369543_ENG.pdf">http://www.lutron.com/TechnicalDocumentLibrary/369543_ENG.pdf</a> for a list of compatible dimmer switches.
PHSR <sup>1</sup>	Philips Xitanium Sensor-Ready	<Illumra>	<u>Single Rocker Self-Powered Light Switch (on/off, dim-up/down)</u> Illumra# ZBT-S1AWH Digi-Key# 1082-1033-ND
			<u>Dual Rocker Self-Powered Light Switch (on/off, dim-up/down, scene1,2)</u> Illumra# ZBT-S2AWH Digi-Key# 1082-1034-ND

\* If you want other specific kind, please contact us.

1. Recommended for EasySense System.

**HC403 FACTORY SETTING (TABLE 2)**

Detection Area	100%
Hold-time	5 sec
Daylight sensor	Disable
Stand-by period (tri-level control)	10 sec
Stand-by dimming level	10%

\* See a separate attachment to find more setting options.