


Remote Control Operating Instructions

Appearance and Button Functions

Size

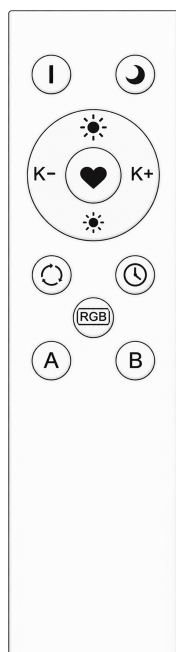

L 5.91" (150 mm) x **W** 1.50"
(38 mm) x **H** 0.51" (13 mm)

BUTTON LAYOUT (TOP TO BOTTOM)

1. **Power on/off** (top left) · **Night light** (top right)
2. **Brightness +** (ring, top)
3. **Color Temp CCT-** (ring, left) · **Favorite Scenes** (centre) · **Color Temp CCT+** (ring, right)
4. **Brightness -** (ring, bottom)
5. **Color Temp Switching** (left) · **Timer** (right)
6. **RGB Color Switching**
7. **A:** White light / RGB colors switching · **B:** 7-color switching, gradient

Button Functions

#	BUTTON	FUNCTION
1	Power on/off	Short press to turn the lights fully on or off.
2	Night light	Short press to enter night light mode (about 10% brightness).
3	Brightness +	Short press the power on button, then press this button to increase the brightness of the linked lamps.
4	Brightness -	Short press the power on button, then press this button to decrease the brightness of the linked lamps.
5	Color Temp CCT-	Short press the power on button, then press this button to lower the color temperature of the linked lamps.

Button Functions (continued)

#	BUTTON	FUNCTION
6	Color Temp CCT+	Short press the power on button, then press this button to raise the color temperature of the linked lamps.
7	Favorite Scene	Short press to recall the favorite scene. Press and hold for 5 seconds: the light breathes once and the current state is saved as the favorite scene.
8	Color Temp Switching	Switches between 3 color temperatures in this order: warm white – natural light – cool white.
9	Timer	Short press to enter timer mode; the light turns off after 60 minutes.
10	A / B	A. White light / RGB switching: switches directly between white light and RGB color light. B. Gradient seven-color running: short press and the lamp automatically switches to seven-color running mode, in this order: red, orange, yellow, green, cyan, blue, purple.
11	RGB Color Switching	Press to enter RGB color switching mode. Each short press switches to the next color, cycling through red, orange, yellow, green, cyan, blue, purple.

Remote Control Functions

1. **Power supply:** 2 × AAA batteries. Communication type: infrared. Control distance: within 8 m (no obstructions).
2. **Number of lamps controlled:** each remote can control a theoretically unlimited number of lamps (within remote control distance).
3. **Memory function:** in any state, when the lights are turned off with the remote and then turned back on, they return to the state they were in when turned off.
4. **Night light mode:** brightness is about 10% of maximum and color temperature is warm light. All function buttons can be operated in this mode.
5. **Timer mode:** short press the button to start a 60-minute timer; the light turns off automatically when time is up. This function supports one fixed time setting, which can be set according to customer requirements.
6. When the remote control's main power is off, short pressing the night light, color temperature switching or RGB color switching button starts the lamps in the corresponding function.