LOW PROFILE EXIT SIGN

Revised: 11.16.26

CEX-2G

Project Name:	
Type:	



FIELD ADJUSTABLE

APPLICATION

Ideal for commercial where economy, appearance and the ultimate ease of installation and maintenance are desired. Solid-state electronics offer both reliability and low-cost performance.

FEATURES:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

MOUNTING:

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.

LAMPS:

- Ultra bright, energy efficient, long life Red or Green LED.
- LEDs have a minimum rated lamp life of 100,000 hours.

BATTERY:

- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTION:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- Custom: Signs available with requested ‘special’ wording.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.
- ARRA and BAA compliant. (optional)

ORDERING INFORMATION

EXAMPLE: *CEX-2G-G-1-WH*

MODEL	# OF FACE		LETTER		OPERATION		PANEL		HOUSING COLOR	
CEX-2G	**(Blank)**	Universal Single/Double Face	**(Blank)**	Red/Green [4, 5]	**(Blank)**	AC-only	**(Blank)**	Clear [2]	**WH**	White Face/ White Housing
			R	Red	**1**	Battery Back up			**BK**	Black Face/ Black Housing
			G	Green	**2A**	Dual circuit (120V) [1]				
					2B	Dual circuit (277V) [1]				

OPTIONS	
SDT	Self Diagnostics [3]
SPV	208/220/240 Volt, 50/60Hz [4]
BAA	Buy American Act compliant
SW	Special Wording Sign
WG-1	Steel Wire Guard (13.5” x 15” x 6”)
BG-1	Vandal Shield Guard, Polycarbonate (15” x 22” x 8”)
RM	Green Running Man Sign

NOTES:
1. Available only with AC units.
2. With single face only.
3. Available only with EM units.
4. Not available with SDT.
5. Field selectable.

UTOPIA LIGHTING reserves the right to change specifications, drawings, dimensions without prior notice.

CEX-2G

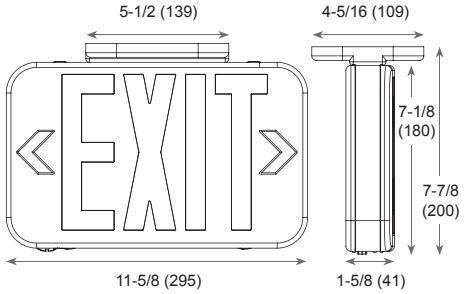

All dimensions are in inches (millimeters).

ELECTRICAL INFORMATION

	Input Watts (W)	Input Amps (A)
CEX-2G-R-1-SDT	120V : 2.5W	120V : 0.05A
	277V : 2.5W	277V : 0.05A
CEX-2G-G-1-SDT	120V : 2.7W	120V : 0.05A
	277V : 2.7W	277V : 0.05A
CEX-2G-RG-1	120V : 1.0W	120V : 0.1A
	277V : 1.0W	277V : 0.1A



RM Option

UTOPIA LIGHTING reserves the right to change specifications, drawings, dimensions without prior notice.