

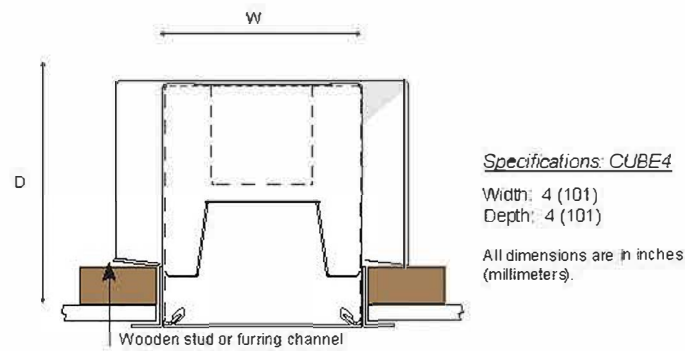


# CUBE2, CUBE4 RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS

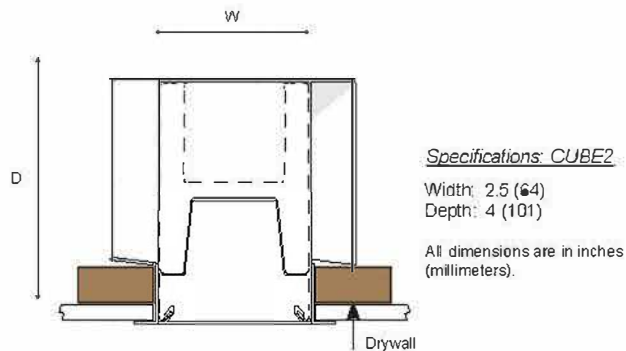


## PART LIST

- A: LED module plate
- B: Lens
- C: BX cable connector
- D: Access plate
- E: Safety bracket screw
- F: Safety bracket

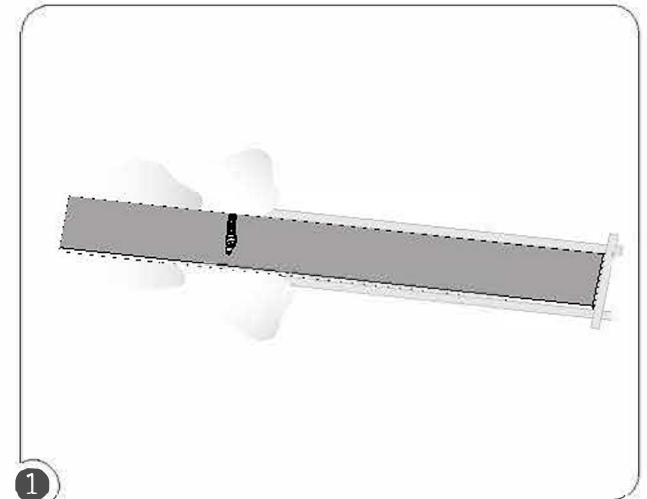


Make an opening on Drywall according to the dimensions.


CUBE2	CUBE4
(2ft) : 24-3/16" x 2-5/8"	(2ft) : 24-3/16" x 4-1/8"
(3ft) : 36-3/16" x 2-5/8"	(3ft) : 36-3/16" x 4-1/8"
(4ft) : 48-3/16" x 2-5/8"	(4ft) : 48-3/16" x 4-1/8"
(6ft) : 72-3/16" x 2-5/8"	(6ft) : 72-3/16" x 4-1/8"
(8ft) : 96-3/16" x 2-5/8"	(8ft) : 96-3/16" x 4-1/8"

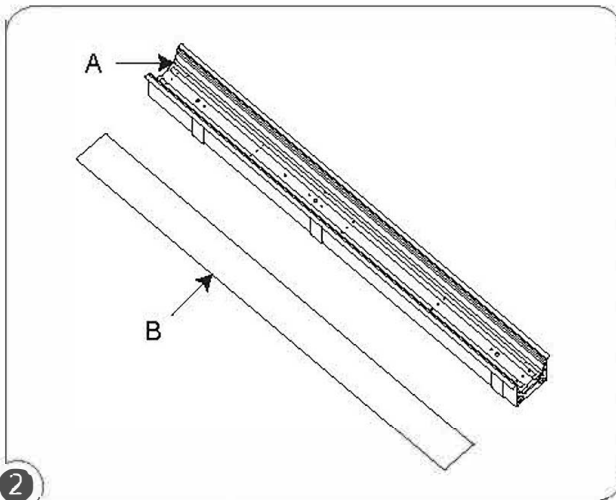

Remove Lens(B) and LED module plate(A).

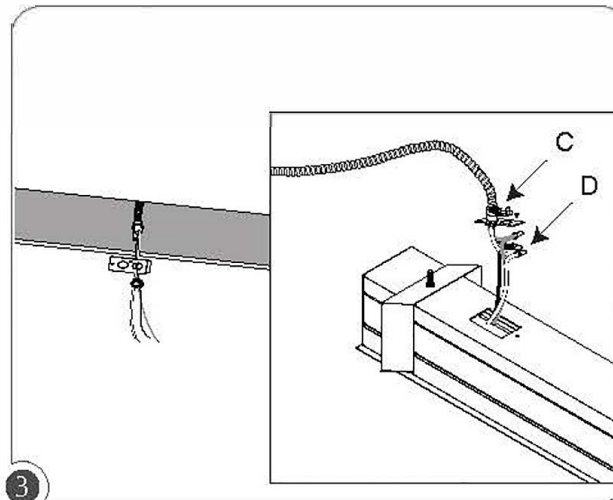


Install BX cable connector(C) to access plate(D). Wire BX cable wires to Fixture wires.

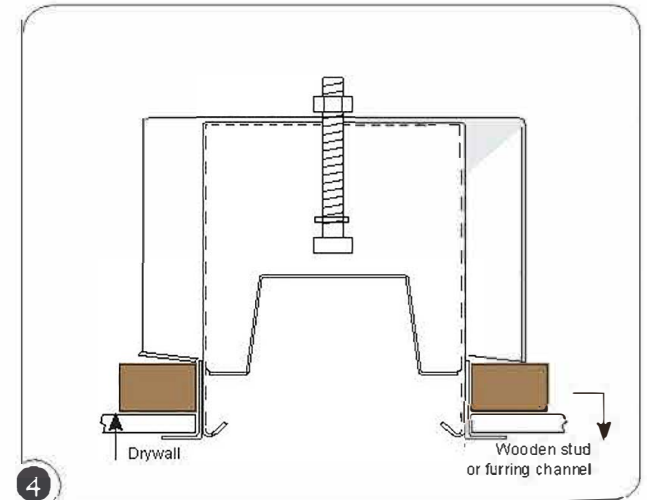


Align fixture to pre-cut hole on drywall and insert fixture.




# CUBE2, CUBE4 RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS

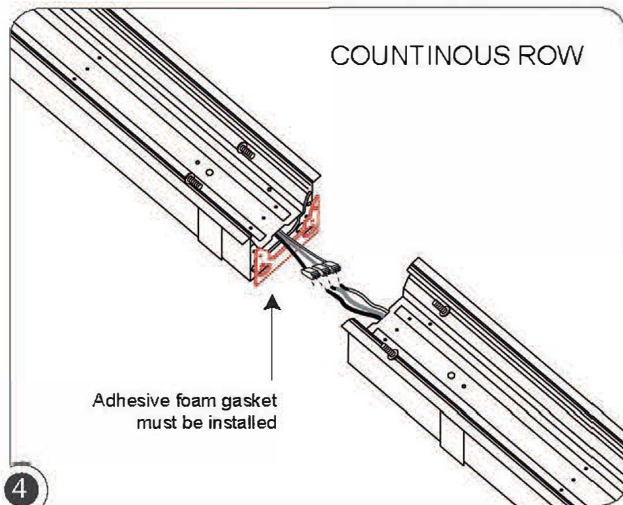

Refer to [4A] on the next page for detailed installation instructions.

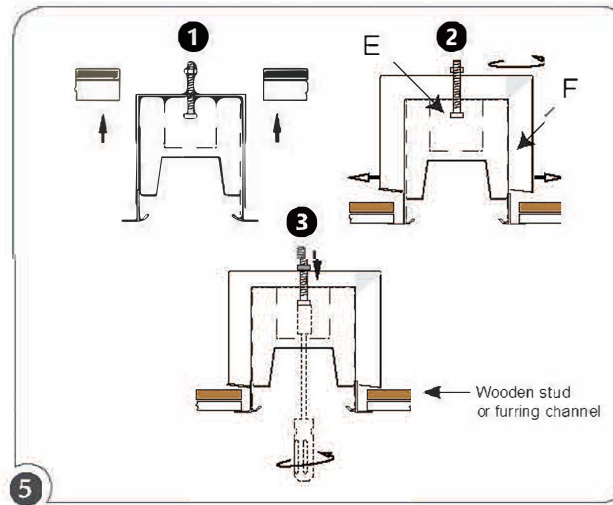

Push safety bracket screw(E) up to Rotate safety brackets(F) once bracket is correctly align tighten screw to lock fixture in to drywall ceiling.

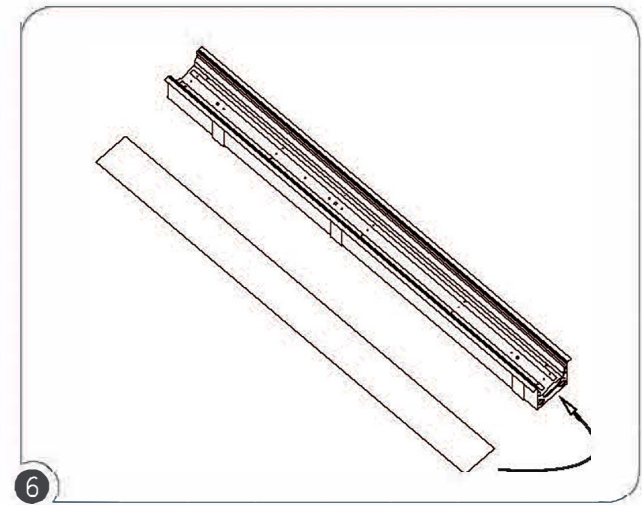

Reinstall LED module plate and lens.


# CUBE2, CUBE4 RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS

## CONTINUOUS ROW

### TOOL(S) NEEDED:


Option 1) Cordless drill and an elbow or L-shape adapter with Philips Insert Bit extension.

Option 2) Flexible Screwdriver with Philips Insert Bit.



Continuous Row

Align continuous row fixtures in numerical order under the same alphabet family.

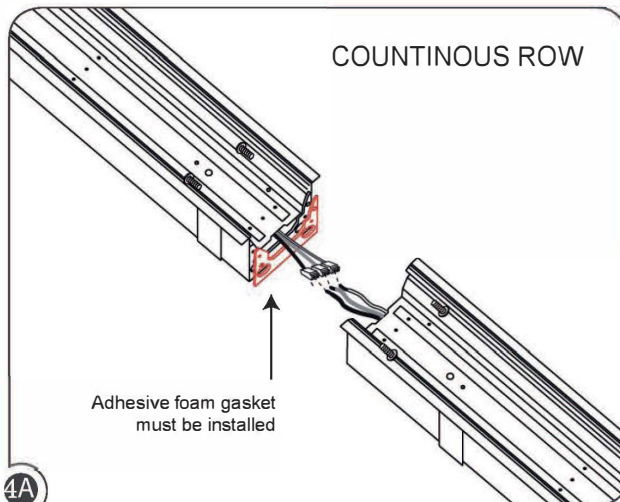

- 1) Make wiring connection from each fixture power supply wires together.
- 2) Align fixtures and screw together with 4 screws(H).