



# FRAME LED

Project Name:	
Type:	

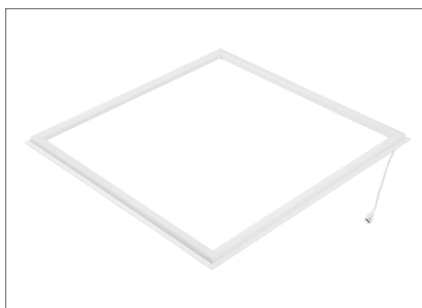

## CASAMBI

### APPLICATION

The design of the frame light produces even, consistent shadowless light. The LEDs enable long life, high lumen maintenance, and are low maintenance and constructed without hazardous materials. Sleek and modern design is suitable for offices, retail, schools, restaurants, healthcare, residential and hospitality applications.

### FEATURES:

- Edge-Lit Design, Illuminated from the edges only.
- FRAME comes in 2x2, and 2x4 options, offering a sleek, modern look with top-notch functionality.
- Cutting-edge optical tech, it matches the lighting specs of traditional LED panels.
- The external driver ensures steady performance and long lifetime.
- Fixture is suitable for recessed mounting with T-bar.
- Optional suspended mount available.
- Aluminum with white powder coated finish.
- Slim profile and low weight design.
- White finished.

### LED:

- Lumen efficiency  $\geq 125$  lm/W
- Field adjustable color temperature: 3000/3500/4000/5000/6500(K)
- CRI: Ra $>$ 80.
- Service life: Greater than 60,000 hours minimizing maintenance frequency.

### ELECTRICAL:

- High power factor electronic driver, operate from a 120~277 Vac input range, 50 / 60 Hz.
- Short circuit protection.
- 0-10V Dimming. (10%-100%.)
- Power Factor:  $>$ 0.9
- THD:  $<$ 10%
- IP Rating: IP40
- Beam angle: 120°
- Ambient Operating Temperature: -4°F (-20°C) ~ 113°F (45°C).

### LISTING:

- ETL listed.
- DLC premium listed.
- 5 year warranty.

### CONFIGURATIONS

Size	LED Watts	Lumen Output (4000K)	Lumen Efficiency (4000K)
2' x 2'	L20	2500 lm	125 lm/W
	L30	3750 lm	
	L40	5000 lm	
2' x 4'	L40	5000 lm	125 lm/W
	L50	6250 lm	
	L60	7500 lm	

Multiplier				
3000K	3500K	4000K	5000K	6500K
0.99	1.00	1.00	1.11	1.06


### ORDERING INFORMATION

EXAMPLE: FRAME-22-3S-5T-UNV-DM

MODEL	SIZE	LED	COLOR TEMP.	MOUNTING	VOLTAGE
FRAME	22 2' x 2'	3S Selectable 20W /30W /40W LED	-5T Selectable 3000/3500/4000/5000/6500K	(Blank) AC FK Recessed T-bar Aircraft Cable Flange kit (field install)	UNV 120-277V
	24 2' x 4'	3S Selectable 40W /50W /60W LED			

LED DRIVER		OPTIONS	
DM	0-10V 10%~100% (Std.)	CASAMBI	Contact factory for CASAMBI READY options

# FRAME LED

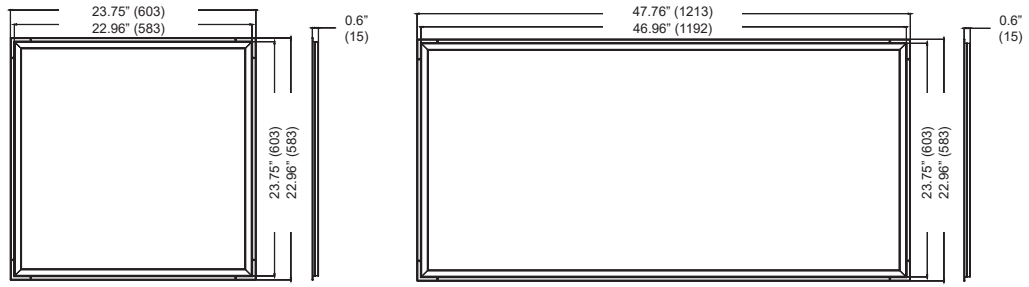

All dimensions are in inches (millimeters).

