

CEMXTE

Project Name:	
Type:	



FEATURES:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Snap-out Chevron directional indicators.

ELECTRICAL:

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power “ON” LED indicator light and push-to test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- 5.5W remote capacity standard.

ILLUMINATION:

- Ultra-bright, energy efficient, long-life Red or Green LED EXIT sign illumination.
- Selectable Red/Green (RG) version available as an option.

MOUNTING:

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

OPTIONS:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage. ¹

LISTING:


- Five-year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.
- ARRA compliant (optional).

REMOTE LAMP CAPABILITY

	Battery	Remote Capacity	RHSLED	MRHLED
CEMXTE	3.6V	5.5W	V	V

ELECTRICAL INFORMATION

	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
CEMXTE-RG	1.2	1.2	0.12A	0.11A
CEMXTE-R-SDT	3.0	3.0	0.36A	0.36A
CEMXTE-G-SDT	3.0	3.0	0.34A	0.34A

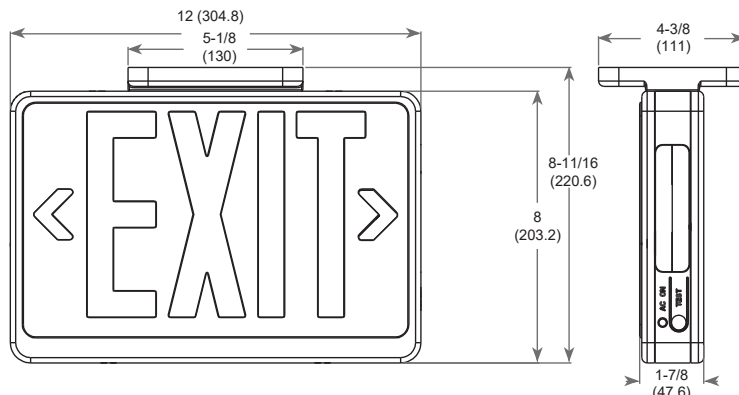

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: CEMXTE-R-W

MODEL	No. of FACES	LETTER COLOR	FINISH	OPTIONS														
CEMXTE	Universal Single / Double Face	<table border="0"> <tr> <td>R</td> <td>Red</td> </tr> <tr> <td>G</td> <td>Green</td> </tr> <tr> <td>RG</td> <td>Red/Green</td> </tr> </table>	R	Red	G	Green	RG	Red/Green	<table border="0"> <tr> <td>W</td> <td>White</td> </tr> <tr> <td>B</td> <td>Black</td> </tr> </table>	W	White	B	Black	<table border="0"> <tr> <td>SDT</td> <td>Self-Diagnostics ¹</td> </tr> <tr> <td>ARRA</td> <td>Assembled in the USA</td> </tr> </table>	SDT	Self-Diagnostics ¹	ARRA	Assembled in the USA
R	Red																	
G	Green																	
RG	Red/Green																	
W	White																	
B	Black																	
SDT	Self-Diagnostics ¹																	
ARRA	Assembled in the USA																	

NOTES:

1. Not available with RG unit.