


LFW

Project Name:	
Type:	

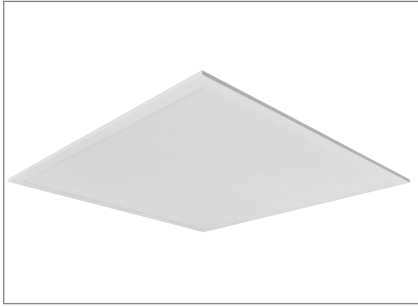

APPLICATION

The wet location with NSF rated flat panel are perfect for food & beverage processing plants, pharmaceutical & cleanrooms, commercial kitchens and indoor parking garages applications.

FEATURES:

- Aluminum frame in white finish with high durability.
- Full-body IP65 certified.
- Field adjustable wattage and color temperature.

MOUNTING:

- Recessed in T-bar grid ceiling with integral earthquake clips for secure attachment.
- Suspension mount cable kit accessories are available. (optional)
- Flange kit for drywall available (optional)

LED:

- High-efficacy LEDs.
- Lumen efficiency: up to 115 lm/W
- Field adjustable color temperature: 3500/4000/5000 (K)
- Field adjustable wattage.
- CRI: 90
- L70≥ 100,000 calculated hours

DIFFUSER:

- Frosted polystyrene diffuser.

ELECTRICAL:

- 0-10V dimming, 1 - 100%
- 120-347V, 120-347V, 50/60Hz
- Power Factor: >0.9, THD <20%
- Operating temperature: -4°F to 104°F (-20°C to 40°C)

LISTING:

- UL listed.
- DLC listed.
- Suitable for wet location.
- IP65 certified housing.
- NSF rated.
- 5 years limited warranty.
- BAA compliant (optional).

CONFIGURATIONS

Size	LED	Lumen Output	Lumen Efficiency
2' x 2'	3P 14/22/30W LED	1610/2530/3450 lm	115 lm/W
2' x 4'	3P 28/36/44W LED	3220/4140/5060 lm	

* Indication that the lumen output is nominal.

ORDERING INFORMATION

EXAMPLE: LFW-22-3P-3T-C9-UNV-DM1


MODEL	SIZE	LED	COLOR TEMP.	CRI	MOUNTING
LFW	22 2' x 2'	3P 14/22/30W LED Field Adjustable	3T 3500/4000/5000K Field Adjustable	C9 90+ CRI (Std.)	(Blank) FK AC Recessed T-bar Flange Kit for Hard Ceiling ¹ Aircraft Cable ²
	24 2' x 4'	3P 28/36/44W LED Field Adjustable			

VOLTAGE	LED DRIVER	OPTIONS	LIGHTING CONTROL SYSTEM
UNV 120-347V	DM1 0-10V 1%~100% (Std.)	BAA BAA(Buy American Act) compliant	AUTANI CASAMBI AVI-ON <Bluetooth> Autani / Keilton Bluetooth control ready options. CASAMBI Bluetooth control ready options. Avi-On Bluetooth control ready options. * Please contact factory for Bluetooth control with sensor and other options


NOTES:

- Supplied in separate boxes, field installed.
- The whole cable length from ceiling to fixture is 66".

LFW

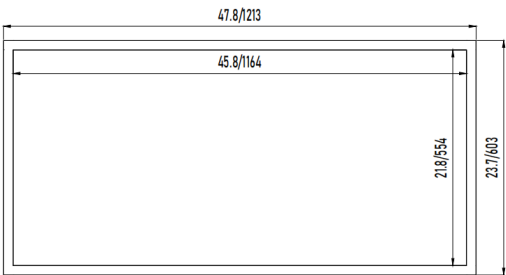

Specifications: 2'x4'

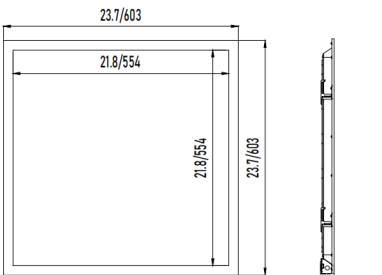

Specifications: 2'x2'