

OHPRH

Project Name:	
Type:	



FEATURES:

- Available in engineering grade, Impact-resistant polycarbonate housing.
- Sealed and gasketed in standard gray or black finish.

MOUNTING:

- Universal mounting adapter plate included. Mounts to singlegang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

LED:


- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 6-ft path of egress at 15-ft mounting height.
- 6.0 watt (12 LEDs x 0.50 watt) per head.
- Adjustable glare-free PAR-Type lamp heads with al linclusive lamp, reflector and lens assembly.

ELECTRICAL:

- Powered from low voltage (5-15VDC) power source with low voltage wiring (not provided).

LISTING:

- Five year warranty.
- UL Listed for wet locations (-30°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

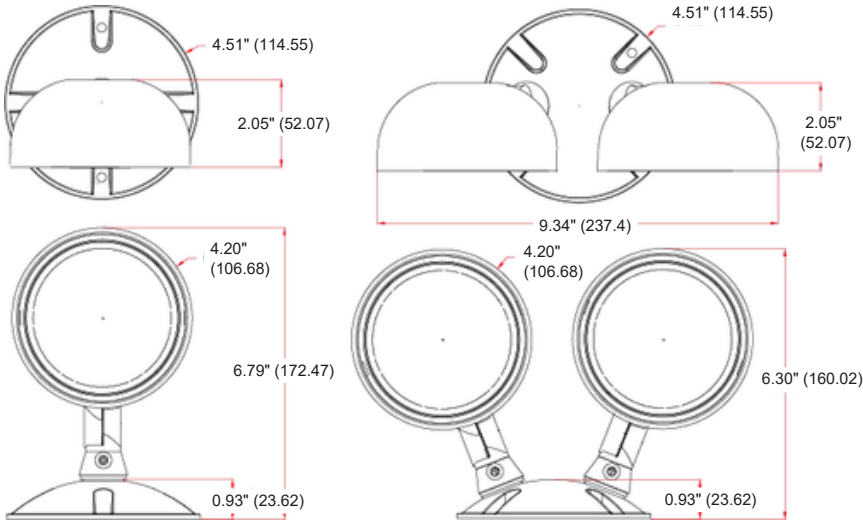

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: OHPRH-1-WP

MODEL	HEADS		HOUSING COLOR		HOUSING	
OHPRH	1 2	Single Head Double Head	(Blank) BK	Gray Black	WP	Polycarbonate (Standard)

FIXTURE COMPATIBILITY LIST

CWLEZXTEU-RC	LEDSEHM	OLHLEU16
NYDXR-RC	LEDXR	OLNEU16