

MWP2

Project Name:	
Type:	



Application:

Designed for outdoor wall-mounted area lighting, this LED surface mount wall pack is suitable for retail and supermarkets, hotels and restaurants, commercial buildings, offices and showrooms, and schools and colleges. The fixture provides efficient LED performance with selectable color temperature, offering flexibility for different environments while replacing traditional metal halide wall packs.

FEATURES:

- Built-in photocontrol and color tunable controller for varieties of CCT.
- Color tunable: 3000K / 4000K / 5000K.
- Meets new DLC 5.1 requirements.
- Built-in level bubble for easy and fast installation.
- Back ring design for even-balanced installation compatible with both round, octagon, and squared junction box.

HOUSING:

- Heavy duty die-cast aluminum housing.
- High impact polycarbonate lens.

MOUNTING:

- Wall surface mount light.
- Built-in level bubble for easy and fast installation.
- Back ring design for even-balanced installation.
- Compatible with round, octagon, and squared junction box.

LED:

- Latest generation LED chips.
- 24W nominal wattage.
- 3500 lumen output.
- 145.8 lm/W efficacy.
- 80+ CRI.
- Color temperature selectable options: 5000K / 4000K / 3000K.

ELECTRICAL:

- Input voltage: 120-277V AC.
- Nominal wattage: 24W.
- 10kV surge option.
- 20kV surge option.
- Operating Temp: -40°C ~ +40°C.

Finish

- BZ: Dark bronze.
- UV stabilized powder coated finish.


LISTING:

- UL and cUL listed for wet locations.
- Meets DLC 5.1 requirements.

CONFIGURATIONS

Model No.	MWP2-35L
Nominal Wattage	24W
Lumens	3500 lm ¹
Efficacy	145.8 lm/W ¹

DIMENSIONS

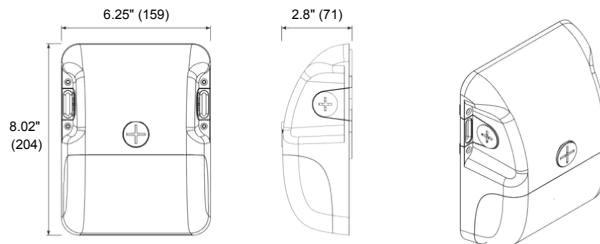

All dimensions are in inches (millimeters).

ORDERING INFORMATION


EXAMPLE: MWP2-35L-T3-UNV-BZ

MODEL	WATTAGE		COLOR TEMP ¹		CRI		VOLTAGE		FINISH	OPTION	
MWP2	35L	24W 3500 Lumen	3T	3000K / 4000K / 5000K Field Selectable	(Blank)	80+	UNV	120-277V	BZ *BK Black RAL#9011 *WH White RAL#9016 *GR Gray RAL#7045 **CC Custom Color * Non-standard finish with extra charge. ** Additional charge & set up fee.	SP10 SP20	10KV Surge 20KV Surge

Note:


1. Lumen and Efficacy shows the highest wattage at 5000K.

Heavy duty die-cast aluminum housing

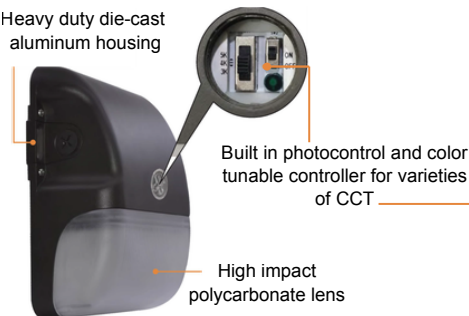

Built in photocontrol and color tunable controller for varieties of CCT

High impact polycarbonate lens

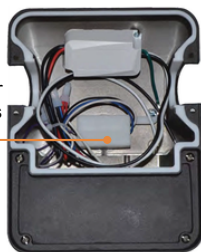

Level Bubble

Built in level bubble for easy and fast installation.



Back ring design for even-balanced installation compatible with both round, octagon, and squared junction box.