

LPT-9-2G
LED POST TOP LIGHT



Table with 2 columns: Date, Project, Prepared for, Type



Features

- Stretched aluminium sleeving, suitable for 2-3/8" (60mm) and 3" (76mm) diameter pole.
- Aluminum heat sink radiation, stainless steel housing.
- Fully gasketed housing.
- Cutting edge LED technology provides maintenancefree operation with significant reduction in energy consumption.
- Without any hazardous material in fixture.

Electrical

- Ambient Operating Temperature: -40°F (-40°C) ~ 122°F (50°C).
- Power Factor: >0.9
- Input Voltage: 120V-277V, 50/60Hz
- THD <15%
- Non-dim is standard.
- 0-10V dim is optional.



LED

- Field adjustable color temperature: 3000/4000/5000 (K)
- Fixed 30W or field adjustable wattage.
- CRI: >70
- Type V distribution.
- Up to 110 LM/W.
- Proprietary binning for uniform color.

Listing

- cETLus listed.
- 5 years warranty.
- IP65.

Application


Precisely designed anti-glare lens provides ideal lights curve and perfect uniformity. Professional designed specific lights angle for excellent uniformity of light output. It is designed to work in building perimeter areas and public spaces completing a wide variety of architectural styles.

Diffuser

- Frosted glass lens is standard.

Configurations

Table with 7 columns: Model, Input Watts, Lumen Output (3000K), Lumen Output (4000K), Lumen Output (5000K), Weight, EPA Rating. It lists configurations for the LPT-9-2G model with 30W, 3SL, 3SM, and 3SH options.

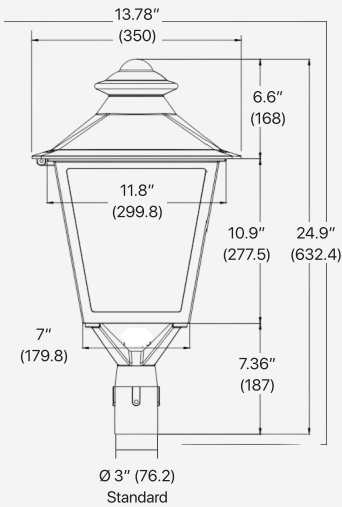

WM (Wall Mount)

LPT-9-2G

LED POST TOP LIGHT



Ordering Information

Example: LPT-9-2G-3SL-3T-UNV-BZ-F-P3



Model		LED		Color Temp.		Voltage		Diffuser		Finish	
LPT-9-2G	30LED	30W	-3T	3000/4000/5000K Selectable	UNV	120-277V (Std.)	F	Frosted Glass Cover (Std.)	BK	Black (RAL#9005) (Std.)	
	3SL	30/50/60W Selectable									
	3SM	35/55/100W Selectable									
	3SH	80/100/120W Selectable									

Mounting		Control				Options	
P3	3" Pole (Std.) ¹	(Blank)	None	3-Pin Receptacle and Twist Lock Photocell Installed 120-277V Shorting Cap NEMA 7-wire receptacle only (no controls) Microwave motion sensor		BG CASAMBI	Bird Guard, Stainless Steel Spikes Contact factory for CASAMBI READY options
P2	2-3/8" Pole ¹	TLPC3					
WM	Wall Mount	TLPC-SC					
		RC7					
		MS					



Notes:

1. Mounting tenon should be at least 3" in height.



LPT-9-2G-30LED

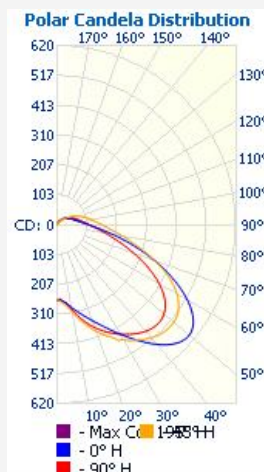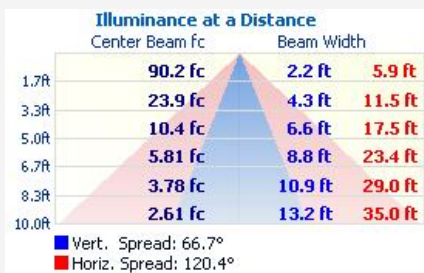


LPT-9-2G-3SL (60W)

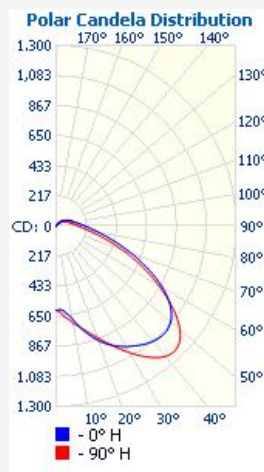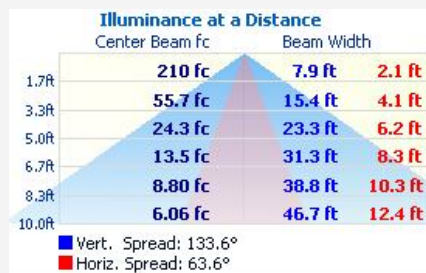

LPT-9-2G3SH (120W)

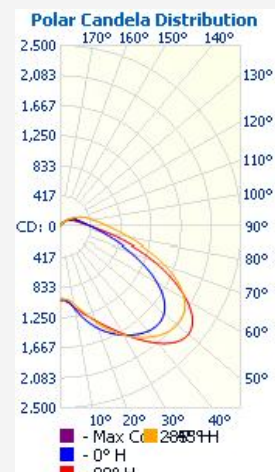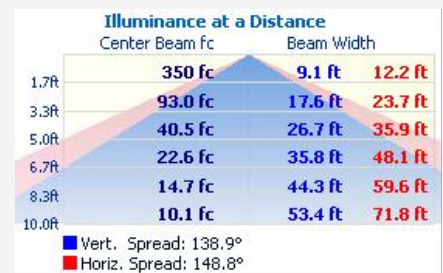

Dimensions

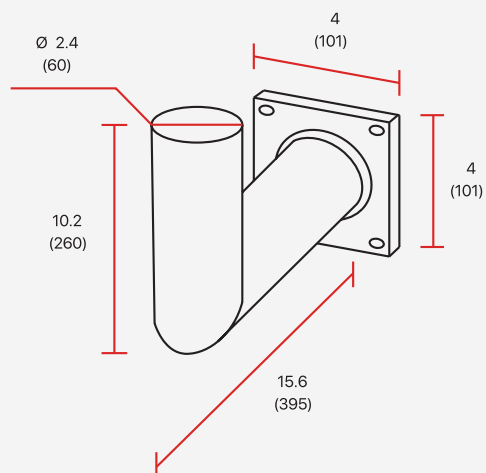

WM (Wall Mount)