

## HPEM

Project Name:	
Type:	

**FEATURES:**

- Injection-molded, engineering grade, 5VA flame retardant, highimpact resistant, thermoplastic in off white or black finish.

**ILLUMINATION:**

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 3-ft path of egress at 7-1/2-ft mounting height.
- High performance chrome-plated metallized reflector and plastic lens.
- 12.0 watt (12 LEDs x 1.0 watt) per head.
- 1160 lumen output.

**MOUNTING:**


- Universal knockout pattern on back plate for surface mount.
- Knockouts provided for conduit feed applications.
- Suitable for wall or ceiling mount.

**ELECTRICAL:**

- Universal 120-277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V long-life, maintenance-free, rechargeable lithium iron phosphate battery.
- Remote capacity of 3.0 watts standard.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**LISTING:**

- Five-year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101, Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under title 20 regulations.

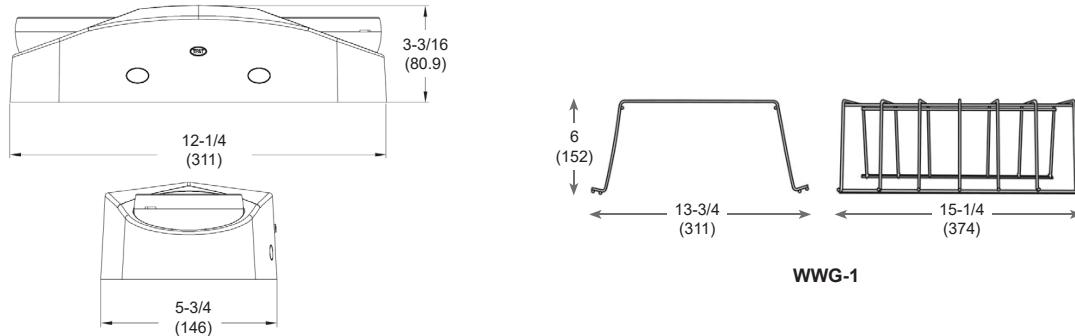

All dimensions are in inches (millimeters).

**ORDERING INFORMATION**

**EXAMPLE: HPEM-W**

MODEL	FINISH	OPTION	
HPEM	<b>W</b> Off White <b>B</b> Black	WWG-1	Wireguard 9-gauge steel, painted white finish.