

E-1

Project Name:	
Type:	

**FEATURES:**

- Adjustable long lasting, efficient, ultra bright white LED lamp heads.
- Unique all-inclusive lamp, reflector and lens assembly.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in off white or black finish.

MOUNTING:

- Universal knockout pattern on back plate for surface mount.
- Suitable for wall or ceiling mount.

ELECTRICAL:

- Dual 120/277 voltage standard. Optional dual 120/230 voltage available.

LED:

- One, 0.5W white LED per lamp head.
- 42 lumens per head.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).

BATTERY:


- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum.
- 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTION:

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- RC: Remote Capacity of 1W. Remote head not included.

LISTING:

- One year warranty on all electronics and housing.
- UL Listed for damp locations (0°C to 40°C / 32°F to 104°F).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.
- NFPA 70 compliant.

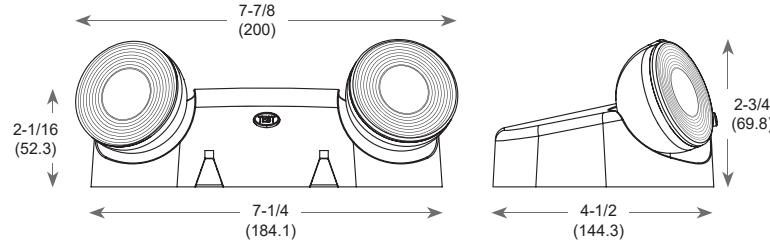

All dimensions are in inches (millimeters).

ORDERING INFORMATION**EXAMPLE: E-1-RC**

MODEL	HOUSING COLOR		OPTIONS		
E-1	(Blank) B	Off White Housing Black Housing	RC 120/230-V2 SPV HL	Remote Capacity ¹ 120/230 Volt 50/60Hz 208/220/240 Volt, 50/60Hz High Lumen LED ¹	

NOTES:

1. -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option.