

MRHLED

Project Name:	
Type:	

**FEATURES:**

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant thermoplastic housing.
- Adjustable, long lasting, efficient, ultra bright white LED heads.
- Unique all-inclusive lamp, reflector and lens assembly.
- 0.5W white LED per head.

MOUNTING:

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Suitable for wall or ceiling mount.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

ELECTRICAL:

- Powered from low voltage power source with low voltage wiring (not provided).


LISTING:

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed with compatible product listed in the chart.
- 5 years limited warranty.
- NFPA 70 compliant.

COMPATIBILITY CHART

* Reference individual unit equipment specification sheets for remote load capacity availability.

Model	3.6V
CKXTE-RC	V
LEDR5HO	V
E-1-RC	V
CXTE-RC	V

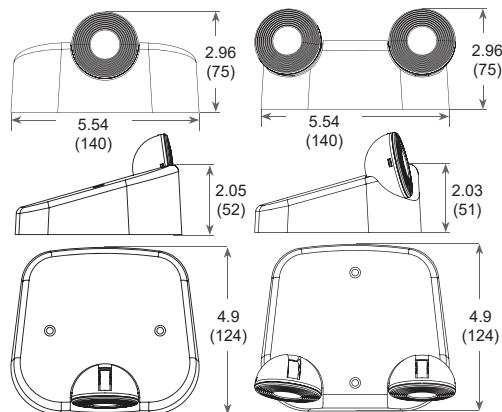

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: MRHLED-1-3.6V

MODEL	HEADS		COLOR		VOLTAGE	
MRHLED	1	Single Head, 0.5W	(Blank)	Off White Housing	3.6V	3.6VDC
	2	Double Head, 1W	B	Black Housing		