

CARELZXTE



APPLICATION

Ideal for commercial where economy, appearance and the ultimate ease of installation and maintenance are desired. LED compact and recessed decorative design Edge-Lite exit sign series utilizes a unique illumination design in an architecturally aluminum housing.

Project Name:	
Type:	

FEATURES:

- Energy efficient LED, recessed compact and decorative design.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.
- Single or double face configuration.
- Available in aluminum or white housing.
- Premium-grade, extruded aluminum housing.
- Trim assembly is easily detachable, providing accessibility for service or maintenance.
- 120+ minute emergency operation.

MOUNTING:

- Compatible with drywall or drop-thru ceiling mount installations.
- Wall mount optional.

ELECTRICAL:

- 120V/277V dual voltage operation standard.
- Charge rate and power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

BATTERY:

- 4.8V long-life, maintenance-free, rechargeable NiCd battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 120 minute emergency illumination.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery pro-rated for five years.
- UL listed for damp locations.
(32°F - 122°F / 0°C - 50°C)
- Meets UL924, NFPA 70, NFPA 101 and the Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

ORDERING INFORMATION

EXAMPLE: CARELZXTE-1-R-W-W-EM

MODEL	# OF FACE	LETTER	HOUSING COLOR	TRIM PLATE	BATTERY	OPTION				
CARELZXTE	1 2	Single Double	R	Red on White	W A	White Trim Plate Aluminum Trim Plate	(Blank) EM	AC-only Ni-Cd Battery	WM	Wall Mount


SIGNAGE ARROWS			
NA SWNA DA SWDA RA SWRA	Exit No Arrow Stairs No Arrow Exit Double Arrow Stairs Double Arrow Exit Right Arrow ¹ Stairs Right Arrow ¹	LA SWLA LARA SWLARA	Exit Left Arrow ¹ Stairs Left Arrow ¹ Exit Left/ Right Arrow ² Stairs Left/ Right Arrow ²

NOTE:


1. Available in single face configuration only.

2. Available in double face configuration only.


CARELZXTE



Ceiling Mount

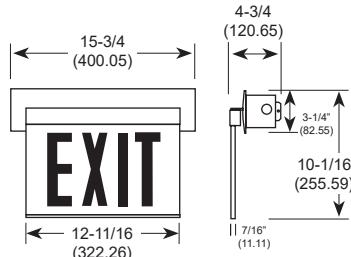

Wall Mount Option



All dimensions are in inches (millimeters).

ELECTRICAL INFORMATION

AC Model EM Model	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
4.3W	4.7W	0.040 A	0.02 A	
4.5W	4.9W	0.042 A	0.02 A	

ARROW CONFIGURATION

SINGLE FACE				
DOUBL FACE				



Wall Mount option