

INDWLEZUNEM



APPLICATION

Ideal for commercial where economy, appearance and the ultimate ease of installation and maintenance are desired. Solid-state electronics offer both reliability and low-cost performance.

FEATURES:

- Housing is reinforced polycarbonate construction.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout is provided for conduit feed applications.
- Easy snap-out Chevron directional indicators.

MOUNTING:

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount.

ELECTRICAL:

- Dual 120/277V operation standard.
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.

LAMPS:

- Ultra-bright, energy efficient, long life Red or Green LEDs.

BATTERY:


- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-min emergency illumination.
- Full automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

OPTION:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different.

LISTING:

- 5 year limited warranty on all electronics and housing. Batteries prorated for 5 years.
- IP66 rated for ingress protection.
- NEMA4X and NSF rated.
- UL certified for use in food service operations.
- UL listed for wet locations -4°F (-20°C) ~ 122°F (50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

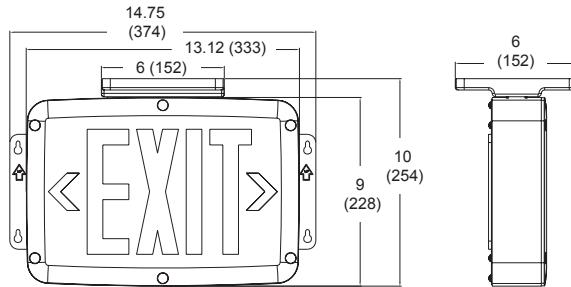

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: INDWLEZUNEM-1-R-W

MODEL	# OF FACE		LETTER		HOUSING COLOR		BATTERY		OPTIONS	
INDWLEZUNEM	1 2	Single Double	R G	Red Green	W B	White Black	(Blank) EM	AC-only NiCd Battery	SDT 2C-120 2C-277 TP	Self-Diagnostics ¹ Dual Circuit with 120V input ² Dual Circuit with 277V input ² Tamper-Proof

NOTES:

1. Available only with EM units.
2. Available only with AC units.