

## RHB5



CASAMBI

## APPLICATION

The LED UFO high bay is ideal for locations such as commercial, retail, gyms, factories, and warehouse.

## FEATURES:

- Heavy duty die-cast aluminum construction.
- Built-in heat sink.
- Field adjustable wattage and CCT.
- White finish standard.

## MOUNTING:

- Hook Mount is standard.
- 3/4" pendant adapter (optional).

## LENS:

- Polycarbonate lens.

## LED:

- Color temperature: 40 / 50 (K)
- Color rendering index: >80
- Life span: 50,000 hrs

## ELECTRICAL:

- Input voltage: 120-277Vac., 50/60Hz
- Operating temperature: -40°C to 40°C (-40°F to 104°F)
- 1-10V dimming is standard.
- 6Kv surge protector standard.
- Provided with 6ft cord.

## LISTING:

- UL, cUL listed for damp location.
- Listed to UL 1598 and UL 8750.
- DLC premium listed.<sup>4</sup>
- 5 years limited warranty.
- BAA compliant. (optional)

## CONFIGURATIONS

	Model	Input Wattage	Lumen Output	Lumen Efficiency
RHB5	3SL	100/120/150W	13200 / 15840 / 19800 lm	132 lm/W
	3SH	150/180/240W	19800 / 23760 / 31680 lm	

\* Based on 5000K

## ORDERING INFORMATION

EXAMPLE: RHB5-3SL-2T-UNV

MODEL	LED	COLOR TEMP.	VOLTAGE	FINISH
RHB5	3SL 3SH	Selectable 100/120/150W LED Selectable 135/180/240W LED	-2T	Selectable 40/50K

## OPTIONS

P	3/4" pendant adapter <sup>3</sup>
EM30	30W EM Battery Backup, IP65 rated <sup>1</sup>
MS	Plug-in microwave bi-level Occupancy Sensor <sup>2</sup>
BAA	BAA(Buy American Act) and BABA(Build America Buy America) compliant
CASAMBI	Contact factory for CASAMBI READY options

## NOTES:

1. EM box provided in orange finish.
2. Adjustable via toggles on the back of the sensor.
3. 3/4" pipe provided by others.
4. DesignLights Consortium (DLC) qualified product. Not all versions of this product may be DLC qualified.  
Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

## RHB5




with EM




Plug-in sensor

## DIMENSIONS

3SL:

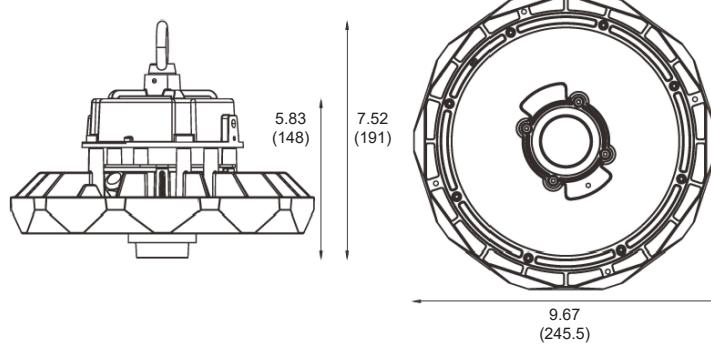

3SH:

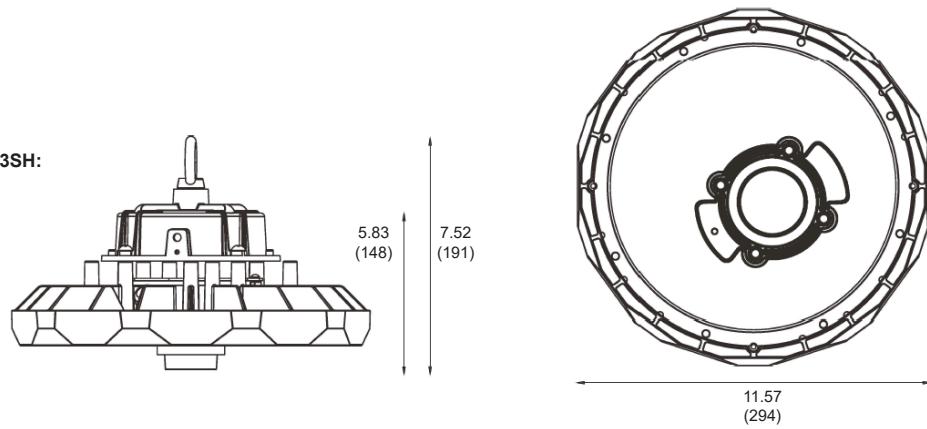

All dimensions are inches (millimeters).