

CWLEZXTEU



APPLICATION

Ideal for commercial where economy, appearance and the ultimate ease of installation and maintenance are desired. A combination exit and emergency LED lighting unit.

FEATURES:

- 5VA flame retardant, UV stabilized polycarbonate housing.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knock-out is provided for conduit feed application.
- Easy removable snap-out Chevron directional indicators.
- Available in white, black, or grey finish.
- 90+ minute emergency operation.

MOUNTING:

- Universal knockout pattern on back plate for wall mount.
- Die-cast aluminum mounting canopy included for top or end mount.

ELECTRICAL:

- Dual 120/277V operation standard.

LAMPS:

- Long lasting, efficient, ultra bright white LED lamp heads.
- 3.6w (3 LEDs x 1.2w) per head.
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- Red or Green illumination.

BATTERY:


- 6V long life, maintenance free, rechargeable NiCd battery.
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-min emergency illumination.
- Bi-color LED indicator light alerts occupant on battery condition: Green - normal, Red - check battery.

OPTION:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- RC: Remote capacity of up to 7.2W
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit
- CW: internal heater and battery blanket for extreme cold temperature applications -4°F (-20°C) ~ 122°F (50°C)
- Custom: custom signs available with requested "special" wording.

LISTING:

- 5 year limited warranty on all electronics and housing. Battery prorated for 5 years.
- UL listed for wet locations 32°F (0°C) ~ 122°F (50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 regulations.

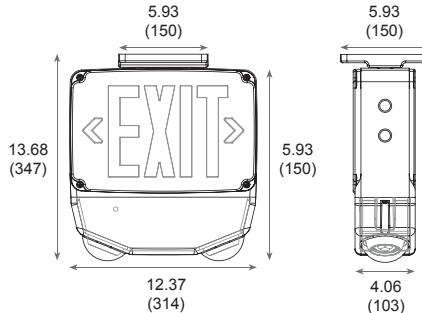

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: CWLEZXTEU-S-R-G

MODEL	# OF FACE	LETTER	HOUSING COLOR	OPTIONS
CWLEZXTEU	S D Single Double	R G Red Green	W B G White Black Gray with White Faceplate	SDT RC TP CW CUSTOM Self-Diagnostics Remote Capacity Tamper-proof Cold Weather Custom Wording