

FLPL100-2G

Project Name:	
Type:	



Requires at least 5 foot candles of fluorescent illumination on the face of the sign at all times.

FEATURES:


- Photoluminescent unframed thin and low profile plastic exit sign.
- Nontoxic, non-radioactive, and recyclable.
- LEED points qualified.
- 100 feet viewing distance.
- Red, Green, or Black panel available.
- Single or double sided.
- Two self-adhesive chevron stickers are included in case the directional chevron(s) is required.
- Need at least 5 foot candle of fluorescent illumination on the face of the sign at all times.

MOUNTING:

- Mounting hardware for surface, flag, ceiling, or stem mounted included as standard.

LISTING:


- Listed to Standard UL924 by ETL Intertek Testing.
- IBC and IFC codes compliant.
- OSHA and NFPA 101-Life Safety Code compliant.
- Listed for high-location and floor-proximity installation.
- Listed for outdoor / wet locations.

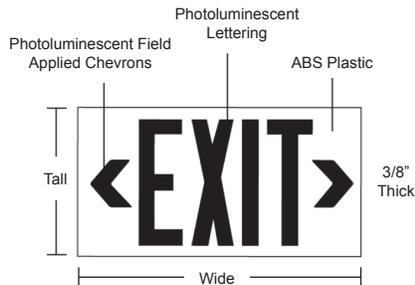

Specifications: FLPL100-2G

Tall: 8-5/8 (219)
Wide: 15-7/8 (403)

All dimensions are in inches (millimeters).

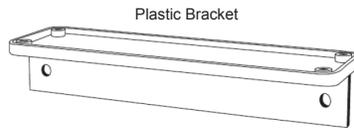

(Mounting Hardware Included)

ORDERING INFORMATION

EXAMPLE: FLPL100-2G-S-R

MODEL	# OF FACE	PANEL COLOR
FLPL100-2G	S Single D Double	R Red plastic body with yellow letter G Green plastic body with yellow letter B Black plastic body with yellow letter