


# LINEA

Project Name:	
Type:	

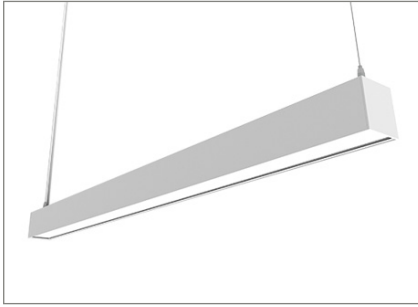

## CASAMBI

### APPLICATION

The LINEA is a featured Architectural Linear fixture. Housing is formed by extruded aluminum with field adjustable color temperatures, and up and down distribution. Ideal for commercial, general office, bank, retails and educational environments.

### FEATURES:

- Aluminum extruded housing.
- Field AB switching is standard (CCT, up/down control).
- Available in White only.
- Operating temperature: -4°F ~ 122°F (-20°C ~ 50°C)

### MOUNTING:

- AC cable pedant mount (AC120 standard).

### LENS:

- 0.05" thickness PC frosted lens for both up and down.
- Beam angle 120°.

### LED:

- High quality array LEDs.
- CRI >80
- Field adjustable CCT: 3000/3500/4000K
- Max. 50W total (selectable 35W down, 50W up and down, 15W up).
- L70: >50,000 hours

### ELECTRICAL:

- 0-10V dimming standard.
- 120-347Vac, 50/60Hz
- THD: <20%
- PF : >0.9
- Class 2

### LISTING:

- ETL listed.
- Suitable for damp & dry location.
- 5 years limited warranty.

## ORDERING INFORMATION

EXAMPLE: LINEA-4-D35L-U15L-3T-UNV-WH-AC120

MODEL	ROW		SECTION		LED <sup>1</sup>		COLOR TEMP. <sup>1</sup>	
LINEA	(Blank) CON	Individual Mount Continuous Row Mount <sup>3</sup>	4	4' Length	D35L-U15L	D35W (1116 lm/ft), U15W (478 lm/ft)	3T	Selectable 30/35/40K
			8	8' Length	D70L-U30L	D70W (1116 lm/ft), U30W (478 lm/ft)		

MOUNTING		VOLTAGE		FINISH <sup>2</sup>		CEILING TYPE		SUSPENSION LENGTH	
(Blank) W	Pendant Wall Mount	UNV	120-347V	WH	Glossy White RAL#9010 (Std.)	X1	T-bar ceiling	AC48	Adjustable Aircraft Cable Canopy 48"L
				BK	Matte Black RAL#9005	X2	Hard ceiling	AC96	Adjustable Aircraft Cable Canopy 96"L
				SL	Matte Grey RAL#7035	X3	Sloped ceiling <sup>4</sup>	AC120	Adjustable Aircraft Cable Canopy 120"L (Std.)
						X5	9/16" Screw Slot ceiling		* Contact factory for custom length.

LED DRIVER		OPTIONS		LIGHTING CONTROL SYSTEM	
(Blank)	0-10V dim to 5% (Std.)	EM8	EM 1296 LUMEN <sup>1</sup>	PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)
		EM15	EM 2430 LUMEN <sup>1</sup>	CASAMBI	Contact factory for CASAMBI READY options
		EM20	EM 3240 LUMEN <sup>1</sup>		
		5C	5" Dia Canopy kit for J-box mount		

### NOTES:

1. Contact factory for other emergency ballast options.
2. Matching product finish, cord and canopy finish is standard (Silver finish with white cord & canopy).
3. Max number of fixtures to link for continuous run:  
LINEA-4FT: 7pcs @ 120V, 14pcs @ 277V, 20pcs @ 347V  
LINEA-8FT: 4pcs @ 120V, 9pcs @ 277V, 11pcs @ 347V
4. The X3 option comes standard with a 5-inch canopy.

# LINEA

**UP & DOWN DISTRIBUTION**

**4FT**

Down 35W  
Down 35W + Up 15W  
Up 15W

**8FT**


Down 70W  
Down 70W + Up 30W  
Up 30W

**DOWN CCT**


3000K  
3500K  
4000K

**UP CCT**

3000K  
3500K  
4000K

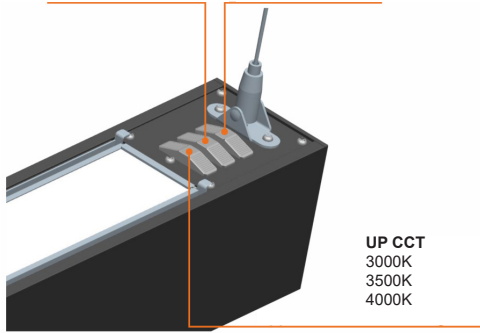


**WALL MOUNT OPTION**

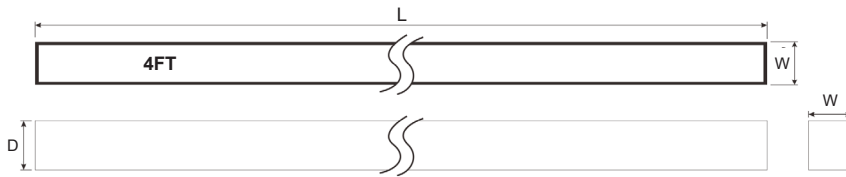

*Specifications: LINEA*

Length: 4ft: 47.48 (1206)  
8ft: 94.72 (2406)  
Width: 2.75 (70)  
Depth: 3.15 (80)

All dimensions are in inches (millimeters).

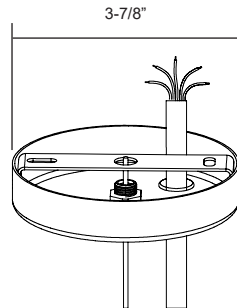


**CANOPY (Standard)**

**CONFIGURATIONS**


Series	Length	Model	AC Input	Lumen Output	Lumen Efficiency
LINEA	4FT	D35L-U15L	50W	5500 lm	110 lm/W
	8FT	D70L-U30L	100W	11000 lm	110 lm/W

**LINEA-4-D35U15**

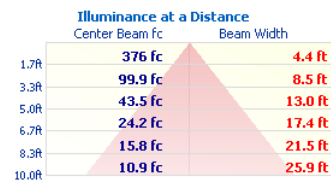

■ Horiz. Spread: 104.7°

**LINEA-4-D70U30**

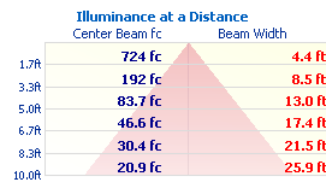

■ Horiz. Spread: 104.7°