

# EM

Project Name:	
Type:	



**FEATURES:**

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in off white or black finish.

**ILLUMINATION:**

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.5 watt (3 LEDs x 0.50 watt) per head.
- Unique all-inclusive lamp, reflector and lens assembly.
- Adjustable LED lamp heads provide up to 30-ft center-to-center spacing with 3-ft path of egress at 10-ft mounting height.

**MOUNTING:**

- Universal knockout pattern on back plate for surface mount.
- Suitable for wall or ceiling mount.
- Knockout for conduit applications.

**OPTIONS:**


- RC: Remote capacity of 2.5 watts.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

**ELECTRICAL:**


- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**LISTING:**

- Five year warranty on all electronics and housing. Batteries pro rated for five years.
- UL listed for damp locations (0°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under title 20 regulations.
- ARRA and BAA compliant. (optional)

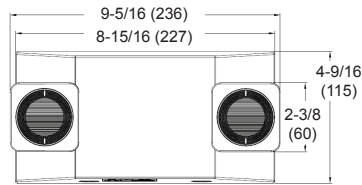

All dimensions are in inches (millimeters).



**ORDERING INFORMATION**

*EXAMPLE: EM-W-SDT*

MODEL	FINISH	OPTIONS
EM	<b>W</b> Off White <b>B</b> Black	<b>SDT</b> Self-Diagnostics <b>RC</b> Remote Capacity <b>BAA</b> Buy American Act compliant