

CKXTE

Project Name:	
Type:	



APPLICATION

Die cast aluminum housing with LED exit and LED emergency light. Unique new design provides spec-grade die cast EXIT sign with LED emergency lights in low profile housing.



FEATURES:

- Energy efficient LED, Spec-grade and premium decorative design.
- Extruded aluminum housing.
- Spec-grade curved faceplate.
- Easily removable chevron directional indicators. Unique design allows double face conversion in the field. Quick-snap face plate closure.
- Single or double face configuration. 90+ minute emergency operation.

MOUNTING:

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate and power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.

LAMPS:

- Ultra bright LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- Ultra-bright, energy efficient, long-life Red or Green LEDs with more then 10 year lifecycle.
- LEDs have a minimum rated lamp life of 100,000 hours.
- 3 watt (1LED x 3W) per head.
- 86 lumens per head.

BATTERY:


- 8.4V long life, Maintenance-free and rechargeable Ni-Cad Battery on emergency (EM) units.
- RC : Remote capable, 3.6Vdc output.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

OPTION:

- RC : Remote capacity of up to 3.0W with 3.6Vdc output, remote head not included.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery pro rated for five years.
- LED lamps are 5 years limited warranty.
- UL listed for damp locations.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- Certified to CEC under Title 20 Regulations.
- NFPA 70 compliant.
- ARRA and BAA compliant. (optional)

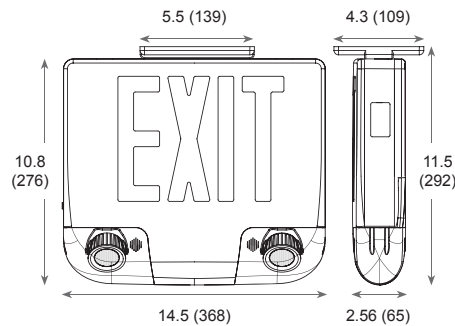

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: CKXTE-1-R-AA-EM

MODEL	# OF FACE	LETTER	HOUSING COLOR	FACE COLOR	OPERATION	OPTIONS
CKXTE	1 Single	R Red G Green	A Brushed Aluminum	A Brushed Aluminum	(Blank) AC-only EM Battery Back up	RC Remote Capable BAA Buy American Act compliant
	2 Double		W White	W White		
	3 Universal Single/Double Face		B Black	B Black		