

MGWP



Application:

Architectural design with high performance LED light engine, this luminaire performs efficiently and consistently in any given environment. Uniform light distribution is delivered through a frosted diffuser. It is ideal for condos, apartments, hotels, porches, and is suitable for indoor and outdoor spaces to replace old-fashioned incandescent "Jelly Jars".

FEATURES:

- Wattage selectable.
- CCT selectable: 3000K/4000K/5000K.
- Built-in photocell (on/off selectable).
- Field selectable dip switches allow the end-user to choose from different CCTs and wattages.
- Impact-resistant polycarbonate diffuser.
- Solid die-cast aluminum housing.

HOUSING:

- Solid die-cast aluminum housing.
- Impact-resistant polycarbonate lens.

MOUNTING:

- Surface wall mount.
- Innovative quick mount system for easy mounting and installation.

LED:

- New generation LED technology.
- CRI: 80+.
- Color Temp: 3000K / 4000K / 5000K field selectable.
- Lumen output and efficacy are based on the highest wattage at 5000K.
- MGWP-D: 2701 lm, 140 lm/W.
- MGWP-C: 2671 lm, 136 lm/W.
- MGWP-F: 2607 lm, 135 lm/W.

ELECTRICAL:

- Input Voltage: UNV = 120-277VAC.
- 3 wattage selectable: 20W / 15W / 10W.
- Operating Temp: -40°C ~ +40°C.

Finish

- BZ: Dark bronze
- UV stabilized powder coated finish.
- Custom finishes available as an option

LISTING:


- UL and cUL listed for wet locations.
- DLC premium listed.

CONFIGURATIONS

Model No.	MGWP-D	MGWP-C	MGWP-F
Nominal Wattage	20/15/10W	20/15/10W	20/15/10W
Lumens*	2701 lm*	2671 lm*	2607 lm*
Efficacy*	140 lm/W*	136 lm/W*	135 lm/W*


Note: Lumen Output and Efficacy are based on the highest wattage at 5000K.

DIMENSIONS

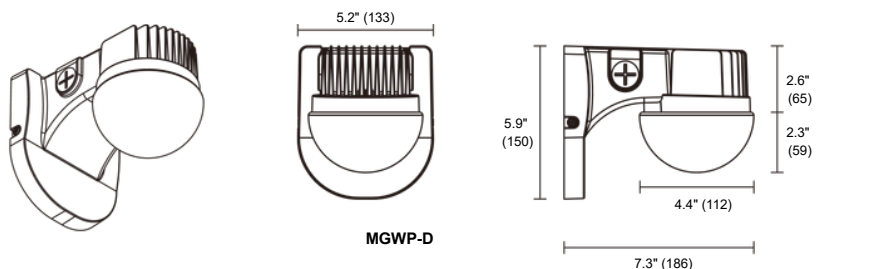


MGWP-D

All dimensions are in inches (millimeters).

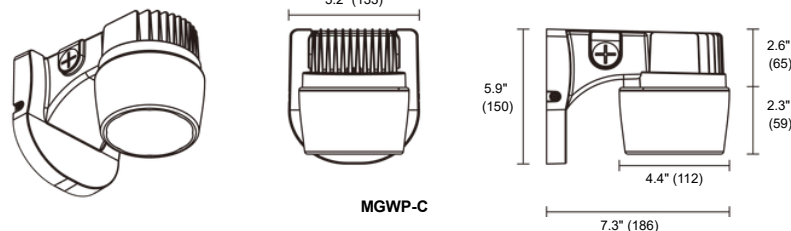

MGWP-C

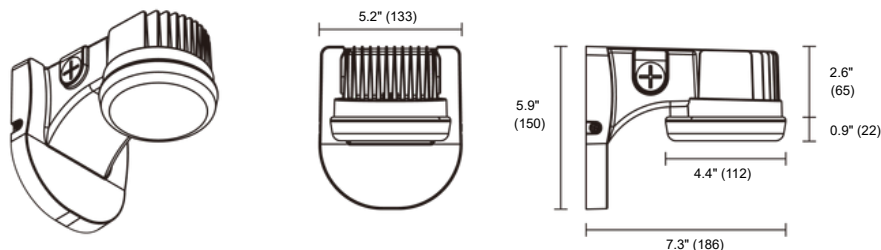

MGWP-F

MGWP

ORDERING INFORMATION

EXAMPLE: MGWP-D-3S-3T-UNV-BZ

MODEL	WATTAGE		COLOR TEMP		CRI		VOLTAGE		FINISH	
MGWP-D Dome lens	3S	20W/15W/10W Field Selectable	3T	3000K/4000K/5000K Field Selectable	(Blank)	80+	UNV	120-277VAC	BZ	Dark Bronze
MGWP-C Cone lens										
MGWP-F Flat lens										



3 WATTAGE SELECTABLE
20 / 15 / 10W

3 CCT SELECTABLE
5000K / 4000K / 3000K

