

OLHLRH16

|               |  |
|---------------|--|
| Project Name: |  |
| Type:         |  |



OPTIONAL



FEATURES:

- Housing is fiberglass reinforced construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.

MOUNTING:

- Die-cast mounting brackets provided for surface wall-mount installation.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

LED:

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing.

ELECTRICAL:


- Powered from low voltage 6V/12V DC power source with low voltage wiring (not provided).

LISTING:

- Five year warranty.
- UL listed.
- IP66 rated for Ingress protection.
- NEMA4X rated.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Rated for Class 1, Division 2, Groups A, B, C, and D.

OPTIONS:

- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

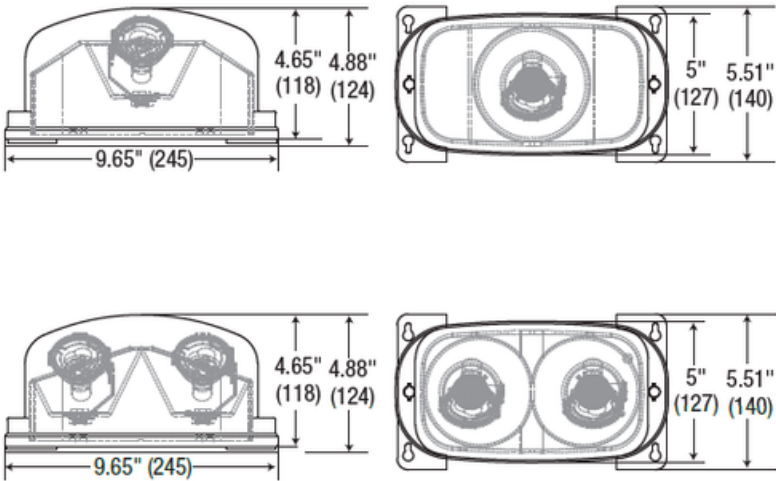

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: OLHLRH16-1-G

| MODEL    | HEADS  |                | HOUSING COLOR |      | OPTIONS |              |
|----------|--------|----------------|---------------|------|---------|--------------|
|          |        |                |               |      |         |              |
| OLHLRH16 | 1<br>2 | Single<br>Twin | G             | Gray | TP      | Tamper-Proof |