

OLPRH

Project Name:	
Type:	



FEATURES:

- Engineering grade, high-impact resistant polycarbonate housing.
- Sealed and gasketed in standard gray or black finish.

MOUNTING:

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

LED:


- Long lasting, efficient, ultra bright white LED lamp heads.
- 0.5 watt (1 LEDs x 0.5 watt) per head. Unique all-inclusive lamp, diffuser and lens assembly.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

ELECTRICAL:

- Powered from low voltage power source with low voltage wiring (not provided).

LISTING:

- Five year warranty.
- cULus Listed for wet locations (-30°C - 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

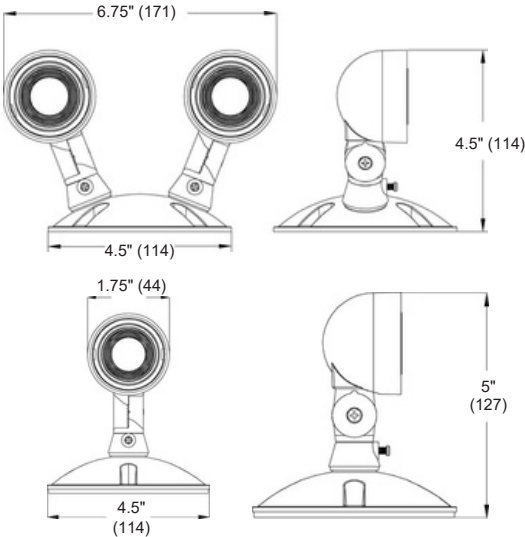

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: OLPRH1-PWP-3.6V

MODEL	HEADS		VOLTAGE		HOUSING		COLOR	
OLPRH	1 2	Single Head Double Head	3.6V	For Use With 3.6V DC Power Source	PWP	Thermoplastic	(Blank) BK	Gray Black