

CKXTE

Project Name:	
Type:	



APPLICATION
Die cast aluminum housing with LED exit and LED emergency light. Unique new design provides spec-grade die cast EXIT sign with LED emergency lights in low profile housing.



- FEATURES:**
- Energy efficient LED, Spec-grade and premium decorative design.
 - Extruded aluminum housing.
 - Spec-grade curved faceplate.
 - Easily removable chevron directional indicators. Unique design allows double face conversion in the field. Quick-snap face plate closure.
 - Single or double face configuration. 90+ minute emergency operation.

- MOUNTING:**
- Aluminum mounting canopy included for top or end mount.
 - Universal knockout pattern on back plate for wall mount.


- ELECTRICAL:**
- 120/277V dual voltage operation standard.
 - Charge rate and power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.

- LAMPS:**
- Ultra bright LED lamps are operating in normal (AC input) and emergency (DC input) modes.
 - Ultra-bright, energy efficient, long-life Red or Green LEDs with more then 10 year lifecycle.
 - LEDs have a minimum rated lamp life of 100,000 hours.
 - 3 watt (1LED x 3W) per head.
 - 86 lumens per head.

- BATTERY:**
- 8.4V long life, Maintenance-free and rechargeable Ni-Cad Battery on emergency (EM) units.
 - RC : Remote capable, 3.6Vdc output.
 - Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
 - Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

- OPTION:**
- RC : Remote capacity of up to 3.0W with 3.6Vdc output, remote head not included.

- LISTING:**
- 5 years limited warranty on materials and all electronics. Battery pro rated for five years.
 - LED lamps are 5 years limited warranty.
 - UL listed for damp locations.
 - Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
 - Certified to CEC under Title 20 Regulations.
 - NFPA 70 compliant.
 - ARRA and BAA compliant. (optional)

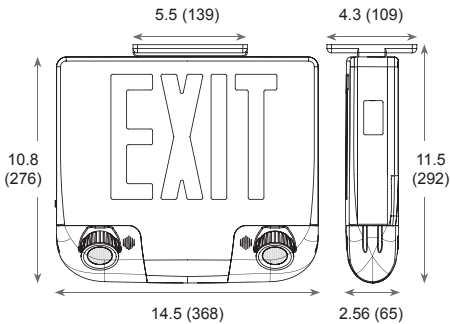

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: CKXTE-1-R-AA-EM

MODEL	# OF FACE		LETTER	HOUSING COLOR		FACE COLOR		OPERATION		OPTIONS	
CKXTE	1	Single	R G	Red Green	A	A W B	Brushed Aluminum White Black	EM	Battery Back up	RC BAA	Remote Capable Buy American Act compliant
	2	Double			W						
	3	Universal Single/Double Face			B						