

FLPL100-3G

Project Name:	
Type:	



Requires at least 5 foot candles of fluorescent, LED, metal halide, or mercury vapor illumination on the face of the sign at all times.

FEATURES

- Photoluminescent, unframed, durable poly-metal exit sign
- 100 foot viewing distance
- 1" stroke, 8" letter height
- Nontoxic, non-radioactive, and recyclable
- LEED points qualified
- Black, Red, Green, Silver, or White panel available
- Single or double sided
- Self-adhesive directional chevrons included (two for single-sided, four for double-sided)
- Requires min. 5 foot-candles (54 lux) of unfiltered fluorescent, LED, metal halide, or mercury vapor illumination on the sign face at all times

MOUNTING

- Surface mount (upper or lower)
- Ceiling mount
- Flag mount
- T-Bar mount
- Mounting hardware included as standard

LISTING

- UL 924 Listed
- IBC and IFC codes compliant
- OSHA and NFPA 101-Life Safety Code compliant
- Listed for high-location and floor-proximity installation
- Listed for indoor/outdoor, wet locations

SPECIFICATIONS: FLPL100-3G

Tall: 9-1/2" (241mm)
Wide: 17-1/4" (438mm)

All dimensions are in inches (millimeters). A labeled dimension line-drawing was not available from the factory source for this poly-metal version — contact Utopia for a certified drawing if one is required for submittals.

ORDERING INFORMATION

EXAMPLE: FLPL100-3G-S-R


MODEL		# OF FACE		PANEL COLOR		MOUNTING	
FLPL100-3G	S	Single	BK	Black poly-metal body with photoluminescent letter	—	Surface flat wall mount (std.) [†]	
	D	Double	R	Red poly-metal body with photoluminescent letter	CM	Ceiling mount	
			G	Green poly-metal body with photoluminescent letter	FM	Flag mount	
			SV	Silver poly-metal body with photoluminescent letter			
			W	White poly-metal body with photoluminescent letter			

Note: Silver uses code "SV" (not "S") to avoid confusion with the "S" (Single) face code in the example string above — a deviation from the factory's own single-letter color codes, worth confirming before this ships.
[†] Surface flat wall mount (std.) is not available with the Double (D) face option.




FLPL100-3G


MOUNTING OPTIONS

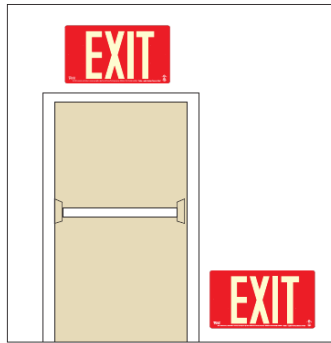

SURFACE MOUNT
UPPER OR LOWER

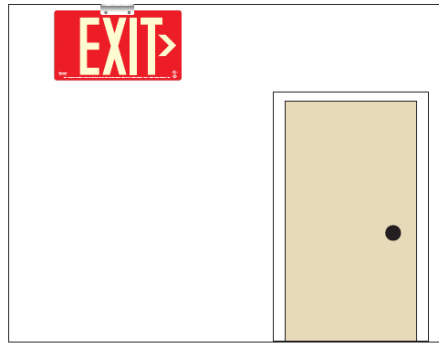

CEILING MOUNT

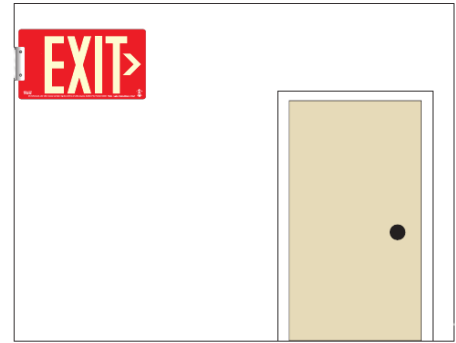

FLAG MOUNT

Two self-adhesive photoluminescent directional chevrons are supplied with each single-sided sign (four with double-sided). Small alignment dots are provided to the left of the letter E and to the right of the letter T. If the exit sign is located other than directly over the exit path, apply a chevron to the left of the E pointing left, to the right of the T pointing right, or both, as appropriate.

INSTALLATION NOTES

- Install only in locations where a reliable external illumination source is present, supplied by a circuit not controlled by automatic timers or sensors, energized at all times during building occupancy.
- Check applicable installation codes (e.g. NFPA 101 — Life Safety Code) to perform periodic visibility tests.
- Periodically clean the sign face with a damp cloth. Do not use thinners or solvents on the sign face.
- Flush (surface) mount: sign attaches directly to the wall/ceiling surface with four supplied screws.
- Flag, ceiling, or T-Bar mount: a mounting bracket is attached first, then the sign is secured to the bracket with the supplied bolts and acorn nuts.