

RH16LED

Project Name:

Type:

INDOOR LED MR16 THERMOPLASTIC
REMOTE HEADS : SQUARE

FEATURES:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic housing.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

MOUNTING:

- Universal mounting adapter plate included, mounts to single-gang switch box. Suitable for wall or ceiling mount.

LED:

- 3.3 watt (3 LEDs x 1.1 watt) per head.
- Optional high lumen heads are 5 watt (7 LEDs x 0.7 watt per head) and provide increased center to center pricing.

ELECTRICAL:

- Powered from low voltage power source with low voltage wiring (not provided). Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

LISTING:


- 5 years limited warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- NFPA 70 compliant.

COMPATIBILITY CHART

* Reference individual unit equipment specification sheets for remote load capacity availability.

Model	MV	3.6V	6V	9.6V	12V
EXL-RC*	V		V		
LEDR5HO	V	V			
R-16HO*	V		V		
LEDCTXEU-RC	V			V	
LEDCAEM	V		V		
CXTE-RC*	V		V		
EM1-HO*	V		V		
NYDXR-RC	V				V
LEDSEHM	V		V		
CADXR	V		V		

* SDT versions of the fixtures are not compatible with remote heads.

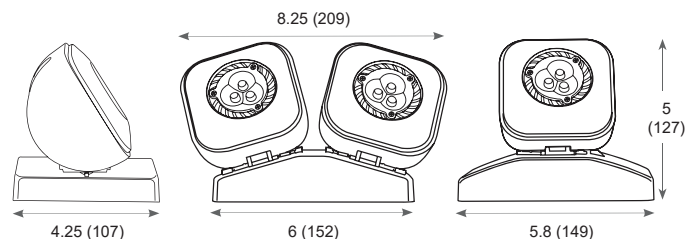

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: RH16LED-1-MV

MODEL	HEADS	COLOR	VOLTAGE	WATTAGE ¹
RH16LED	1 Single Head 2 Double Head	(Blank) Off White Housing B Black Housing	MV For use with 3.6V, 6V, 9.6V & 12V DC Power Source 3.6V 3.6V 6V 6V 9.6V 9.6V 12V 12V	(Blank) 3LEDs 3.3 Watts HL 7LEDs 5.0 Watts

NOTES:

1. Wattage rating stated per head.