

RHSLED

Project Name:	
Type:	



INDOOR LED THERMOPLASTIC REMOTE HEADS : SQUARE

FEATURES:

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic housing.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.

MOUNTING:

- Universal mouting adapter plate included, mounts to single-gang switch box. Suitable for wall or ceiling mount.

LED:

- Adjustable LED lamp heads provide optimal center-to-center spacing.
- 1.0W (8 LEDs x 0.125 watt) per head.

ELECTRICAL:

- Powered from low voltage power source with low voltage wiring (not provided). Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.


LISTING:

- 5 years limited warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL listed with compatible product listed in the chart.
- NFPA 70 compliant.

COMPATIBILITY CHART

* Reference individual unit equipment specification sheets for remote load capacity availability.

Model	MV
EXL-RC*	V
LEDR5HO	V
R-16HO*	V
LEDCXTEU-RC	V
LEDCAEM	V
CKXTE-RC	V
CXTE-RC*	V
EM1-HO*	V
NYDXR-RC	V
LEDSEHM	V
CEU-RC*	V
LPEC	V

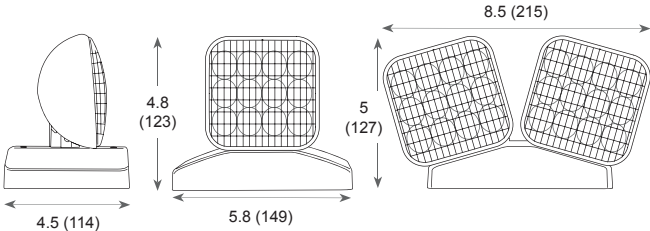

All dimensions are in inches (millimeters).

* SDT versions of the fixtures are not compatible with remote heads.

ORDERING INFORMATION

EXAMPLE: RHSLED-1-MV

MODEL	HEADS		OPTIONS		VOLTAGE		COLOR		WATTAGE ¹	
RHSLED	1 2	Single Head Dounle Head	(Blank)	For standard non-self-diagnostic fixtures	MV	For use with 3.6V, 6V, 9.6V & 12V DC Power Source	(Blank) B	Off White Housing Black Housing	(Blank) HL	8LEDs 1W 12LEDs 1.5W
			SDT	For use with fixtures with a self-diagnostic option						

NOTES:
1. Wattage rating stated per head.