


CUBE2

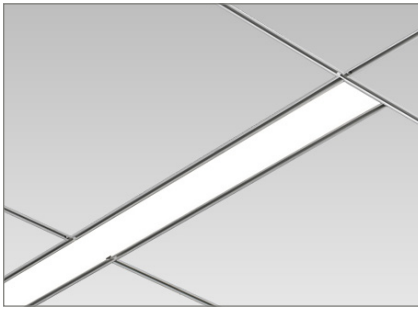

CASAMBI

APPLICATION

The CUBE is a featured Architectural Linear fixture. Housing is formed by cold-rolled steel with a highly reflective die-formed white painted steel reflector. The snap-in acrylic lens has a matte finish and a diffuser (.125" thick) which is removable for LED module replacement. It is used for multiple applications such as commercial, general office, banking, retail and educational environments.

Project Name:	
Type:	

MOUNTING:

- Compatible with most ceiling including T-bar, screw slot and drywall.

LED:

- High quality arrayLEDs.
- LM80
- Color Temperature: 2700/3000/3500/4000/5000 (K).
- Color Rendering Index: >80 (optional>90).
- Nominal Lamp Life: 100,000 hours.
- Reported L70 hours: +60,000 (55°C).

ELECTRICAL:

- High power factor electronic driver, operate from a 120 ~ 277 Vac input range, 50 / 60 Hz.
- Features included over voltage protection, surge, short circuit protection and over load protection.
- Power Factor: typical > 0.95, THD <20, meets Class1 or Class 2 circuit.
- 0-10V dimmable driver as standard.
- 0-10VDC dimming 1%~100%.
- Operating temperature: -4°F (-20°C) ~ 122°F (50°C).

- <ELCU-200>
- Guarantees emergency lighting remains ON or is turned on when power to the control device is lost.
- Interfaces with fire alarm panel or security system.
- "Watchdog" feature allows emergency loads to be controlled in tandem with normal power loads.
- UL listed for use in emergency circuits.

FINISH:

- Standard powder-coat textured white painted finish on exposed trim, consult factory for custom colors.
- Comes with snap-in acrylic lens as standard.

LISTING:

- UL / CUL listed.
- Listed to UL 1598 and UL 8750.
- UL listed for dry & damp location.
- DLC listed. ¹³
- CEC Compliant EM (please contact for more information)
- Assembled in USA (optional).
- BAA compliant (optional).
- Trade Agreements Act compliant (optional).
- 5 years limited warranty.
- 7 or 10 years limited warranty. (optional) ⁷
- CCEA City of Chicago Environmental Air approved (optional).
- Bluetooth Mesh System available, please contact factory for more information.

CONFIGURATIONS

Series	Size	Model #	AC Input	Fixture Lumen Output (4000K)		Lumen Efficiency (4000K)
CUBE2	2'	18L	9.9W	1280.46 lm (100% Down)	1280.46 lm	129.34 lm/W
		27L	14.85W	1641.66 lm (100% Down)	1641.66 lm	110.55 lm/W
		36L	19.8W	2122.36 lm (100% Down)	2122.36 lm	107.19 lm/W
		48L	26.4W	2811.6 lm (100% Down)	2811.6 lm	106.5 lm/W
		54L	29.7W	3146.41 lm (100% Down)	3146.41 lm	105.94 lm/W
	3'	18L	14.85W	1921.29 lm (100% Down)	1921.29 lm	129.38 lm/W
		27L	22.27W	2461.50 lm (100% Down)	2461.50 lm	110.53 lm/W
		36L	29.7W	3182.95 lm (100% Down)	3182.95 lm	107.17 lm/W
		48L	39.6W	4217.4 lm (100% Down)	4217.4 lm	106.5 lm/W
		54L	44.55W	4720.51 lm (100% Down)	4720.51 lm	105.96 lm/W
	4'	18L	19.8W	2562.12 lm (100% Down)	2562.12 lm	129.40 lm/W
		27L	29.7W	3283.33 lm (100% Down)	3283.33 lm	110.55 lm/W
		36L	39.6W	4244.72 lm (100% Down)	4244.72 lm	107.19 lm/W
		48L	52.8W	5623.2 lm (100% Down)	5623.2 lm	106.5 lm/W
		54L	59.4W	6294.02 lm (100% Down)	6294.02 lm	105.96 lm/W
	5'	18L	24.75W	3202.15 lm (100% Down)	3202.15 lm	129.38 lm/W
		27L	37.13W	4104.72 lm (100% Down)	4104.72 lm	110.55 lm/W
		36L	49.5W	5305.9 lm (100% Down)	5305.9 lm	107.19 lm/W
		48L	66W	7029 lm (100% Down)	7029 lm	106.5 lm/W
		54L	74.25W	7866.78 lm (100% Down)	7866.78 lm	105.95 lm/W
	6'	18L	29.7W	3842.58 lm (100% Down)	3842.58 lm	129.38 lm/W
		27L	44.55W	4925 lm (100% Down)	4925 lm	110.55 lm/W
		36L	59.4W	6367.08 lm (100% Down)	6367.08 lm	107.19 lm/W
		48L	79.2W	8434.8 lm (100% Down)	8434.8 lm	106.5 lm/W
		54L	89.1W	9400.14 lm (100% Down)	9400.14 lm	105.95 lm/W
	8'	18L	39.6W	5124.24 lm (100% Down)	5124.24 lm	129.40 lm/W
		27L	59.4W	6566.67 lm (100% Down)	6566.67 lm	110.55 lm/W
		36L	79.2W	8489.45 lm (100% Down)	8489.45 lm	107.19 lm/W
		48L	105.6W	11246.4 lm (100% Down)	11246.4 lm	106.5 lm/W
		54L	118.8W	12588.05 lm (100% Down)	12588.05 lm	105.96 lm/W

OUTPUT CURRENT

		Bi-Level		Tri-Level (Default)	
SW1	SW2	Config Range	Default	Config Range	Default
Close	Open	10% - 70%	40%	10% - 70%	30%
Open	Close	10% - 70%	40%	10% - 70%	70%
Close	Close	100%	100%	100%	100%
Open	Open	0%	0%	0%	0%

Multiplier			
CCT	3000K	3500K	5000K
Down only	0.9642	0.9822	1.0357

CUBE2

WEIGHT

Item	lbs	kg
CUBE 2 2FT DRYWALL	8.14	3.69
CUBE 2 3FT DRYWALL	11.00	4.99
CUBE 2 4FT DRYWALL	12.89	5.85
CUBE 2 8FT DRYWALL	25.45	11.55
CUBE 2 4FT G1	12.85	5.83
CUBE 2 8FT G1	23.73	10.77
CUBE 2 4FT SS	12.05	5.47
CUBE 2 8FT SS	22.15	10.05
CUBE 2 HC90 DRYWALL	17.37	7.88
CUBE 2 X DRYWALL	17.63	8.00
CUBE 2 T DRYWALL	12.76	5.79



DROP LENS

ORDERING INFORMATION

EXAMPLE: CUBE2-IND-4-D27L-30K-FT-UNV-STB

MODEL	ROW ¹	SECTION ²	LED Downlight (per/4ft section)	COLOR TEMP.
CUBE2-IND (Individual Mount) CUBE2-CON (Continuous Row Mount)	xx' Specify nominal overall row length in 1' increments (Continuous runs)	2 2' Length 3 3' Length 4 4' Length 5 5' Length 6 6' Length 8 8' Length ⁵	D18L 18W LED (734 lm/ft) D27L 27W LED (924 lm/ft) D36L 36W LED (991 lm/ft) D54L 54W LED (1467 lm/ft) * Maximum wattage per 4ft section - recessed mount : 54W (down light) * Contact factory for custom wattage or lumen requirement.	-27K 2700K ¹² -30K 3000K -35K 3500K -40K 4000K -50K 5000K
CUBE2-CM (Custom)	Must provide a sketch on the last page			

CRI	MOUNTING	PERIMETER	VOLTAGE	EM SECTION ⁶	FINISH ¹⁴
(Blank) C9	80+ CRI 90+ CRI ¹¹ G1 9/16", 15/16", 1" T-bar Ceiling Grid ²¹ SS 9/16" Screw Slot, 9/16" T-bar with Tegular tile ceiling FT Standard 1/2" Flange ^{3, 22} SF Spackle Flange (Trimless) ^{3, 15, 22} NFR Non-flanged Recessed	(Blank) Non-perimeter (Std.) PER Perimeter	UNV 120-277V 120 120V 277 277V 347 347V ²³	(Blank) None EM 1SE 1 Section 2SE 2 Section xSE x Section	(Blank) Matte White RAL #9003 (Std.) *BK Black RAL #9011 *SV Silver (RAL #9022) **CC Custom Color ¹⁸ *CSS Custom Canopy Color (White is Std.) *AMB Anti-Microbial Coating (Matte Skye White) * Non-standard finish with extra charge. ** CC: additional charge & set up fee. Provide RAL# code.

LED DRIVER

(Blank) 0-10V dim to 1% (Std.) (dim both uplight and downlight simultaneously) ES566 eldoLED SOLOdrive Natural Dimming to dark, 0-10V, 100% ~ 0.1% dim SD40 40% / 100% Bi-Level Step dim SDXX XX% / 100% Bi-Level Step dim (Specify XX : 10% ~ 70%) PHSR Philips Xitanium Sensor-Ready, Dali 5%~100% dim. PHDL Philips Xitanium DALI driver, Dim to 5% TDM Triac Dim. (120V only) TD30/70 30% / 70% / 100% Tri-Level Step dim TDXX/YY XX% / YY% / 100% Tri-Level Step dim (Specify XX, YY : 10% ~ 70%)	LDE1 Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology, 100% ~ 1% dim ELV ELV compatible (reverse-phase or trailing-edge), (120V only) TRIOT Tridonic IoT ready, 1-100% dim via Smart Module Interface (SMI), automated dimming/lighting controls via Enlighted Sensor Interface 0-10V DIM-TO-OFF DMX DMX512 control system (Only available with RGB+W option) DLM Wattstopper's DLM interface (Only available with RGB+W option) LTEA2W Hi-lume 1% 2-wire LED driver (120V forward phase only) ²⁶ BLT Bluetooth Mesh System (contact factory for more information)
---	--

CUBE2


OPTIONS		LIGHTING CONTROL SYSTEM	
STB Slip Through Bracket ⁴ HC90-11 90° Horizontal Lit Connector, 1'x1' ^{24, 27} HC90-12 90° Horizontal Lit Connector, 1'x2' ^{24, 27} HC90-21 90° Horizontal Lit Connector, 2'x1' ^{24, 27} HC90-22 90° Horizontal Lit Connector, 2'x2' ²⁷ HC135-22 135° Horizontal Lit Connector, 2'x2' ^{24, 27} TC T-Type Lit Connector ²⁴ XC X-Type Lit Connector ²⁴ CW90 Ceiling to Wall corner connector ¹⁹ EMG8 1296 LUMEN EM Battery Backup (CEC Compliant EM) ^{9, 28} EMG15 2430 LUMEN EM Battery Backup (CEC Compliant EM) ^{9, 28} EMG20 3240 LUMEN EM Battery Backup (CEC Compliant EM) ^{9, 28} EMG25 4050 LUMEN EM Battery Backup (CEC Compliant EM) ^{9, 28} ELCU-200 Fail-to-on Emergency lighting, UL924 ¹⁰ GLR Fast Blow Fuse ²⁵ GMF Slow Blow Fuse ²⁵ ARRA Assembled in USA for Buy American Act BAA BAA(Buy American Act) and BABA(Build America Buy America) compliant TAA Trade Agreements Act compliant O7W Optional 7 Years Limited Warranty ⁷ O10W Optional 10 Years Limited Warranty ⁷ AMS Bluetooth Mesh Wireless Sensor. Occupancy/Daylight/0-10V Dimming ³⁰ DPMS Daylight Dimming Photo Sensor (0-10 VDC Control) SO Dimming Wires connected to Sensor Only (available option on FS-205 non-Bluetooth AMS sensor only) ⁸ DROP E1F 1/2" drop lens E2F End feed on one end (Pre-drilled hole for 1/2" fitting) CCEA End feed on both ends (Pre-drilled holes for 1/2" fitting) Chicago Plenum		LUTRON VIVE  Click Here! SNS200 <EasySense> EasySense Fixture-mount occupancy sensing, daylight harvesting and task tuning in one device (Must be ordered with PHSR driver) ^{16, 20} RS-IR IR dongle v2.0 for EasySense control SU-5E <Enlighted> Enlighted IoT ready 0-10V Indoor Micro sensor with occupancy/vacancy detection, daylight harvesting, thermal sensing, task tuning, and room and zone control, Bluetooth enabled (Must be ordered with TRIOT) ¹⁷ RS-WS Enlighted Room controller providing basic control functions of a standard wall switch with preset dimming capability IFS105SE <Bluetooth> Bluetooth Mesh Wireless Sensor. Occupancy/Daylight/0-10V Dimming PPA102S Bluetooth Powerpack (Consult factory for installation location) CASAMBI Contact factory for CASAMBI READY options	

NOTES:


- Specify only when Continuous Row Mount.
- No need to select, if same as row length and section length.
- Requires # STB as standard.
- Standard with "FT" and "SF" mounting.
- Comes with 1pc 8ft lens.
- EM is installed in last 4' of luminaire sections. Separate section required 2SE or specified. Must specify voltage, not available with 347V.
- This limited warranty covers electrical parts only and does not apply to labor, equipment lease, or defect from improper installation or operation.
- Dimming wires provided and connected to sensor only, not for dimmer switch. (available with AMS and DPMS option)
- Contact factory for other emergency ballast options.
- Shipped separately.
- Lumen per watt is around 15% less than standard CRI (80+).
- Available with C9 (CRI 90+) only.
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
- Cord is available in white or black. (Black is not available for the EM option)
- Available with 4ft and 8ft only.
- See NFC and IR manual in the separate attachment. If your phone is not compatible, please order "RS-IR" and follow the manual.
- "RS-WS" option can be added if wish to have a wall switch, please see Enlighted Room Controller in the separate attachment.
- Refer to color charts (RAL and/or Cardinal) in the separate attachment.
- Only applicable for FT and SF mounting option.
- Refer to Advanced Grouping Datasheet for its default setting and compatible wireless switches.
- Compatible with T-bar ceiling type.
- Compatible with hard ceiling type.
- 347V cannot work with Emergency Battery Backup.
- Only available for -FT mounting application.
- Must specify voltage, not available with 347V.
- Not available with any 1ft individual configuration due to space limitations.
- Refer to a separate CUBE2-HC90 spec sheet to find more information.
- For 3ft configuration, EM can only be remote mounted. Remote box is provided by others.
- Automatic on/off is not available. For automatic on/off, additional occupancy sensor is required or a manual on/off switch can be done.
- With TDM/ELV/SDxx/TDxx: Only available with line-voltage on/off occupancy sensor.

CUBE2


CUBE2-2-18L




CUBE2-2-27L




CUBE2-2-36L




CUBE2-2-48L




CUBE2-2-54L




CUBE2-3-18L




CUBE2-3-27L




CUBE2-3-36L




CUBE2-3-48L




CUBE2-3-54L




CUBE2-4-18L




CUBE2-4-27L




CUBE2-4-36L




CUBE2-4-48L




CUBE2-4-54L




CUBE2-5-18L




CUBE2-5-27L




CUBE2-5-36L




CUBE2-5-48L




CUBE2-5-54L




CUBE2-6-18L




CUBE2-6-27L



CUBE2-6-36L




CUBE2-6-48L




CUBE2


CUBE2-6-54L




CUBE2-8-18L




CUBE2-8-27L





CUBE2-8-36L



CUBE2-8-48L



CUBE2-8-54L



Sensor Plate




Lutron Vive Integral
fixture control installation




EasySense
fixture-mount installation

SIDE VIEW

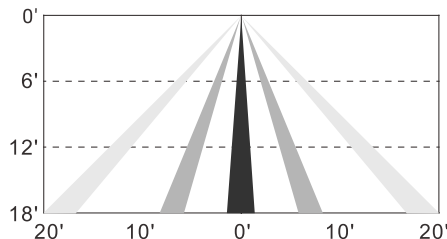

TOP VIEW




AMS, IFS105SE coverage pattern

CUBE2


- MOUNTING DETAILS

9/16" Grid Mounting Options




9/16" Grid, Standard Tile:
Specify G1 in part #

15/16" Grid Mounting Options




15/16" Grid, Standard Tile:
Specify G1 in part #

1" Grid Mounting Options




1" Grid, Standard Tile:
Specify G1 in part #

9/16" Screw Slot Mounting




Screw Slot Grid:
Specify SS in part #

9/16" T-bar with Tegular Tile



9/16" T-bar with Tegular Tile:
Specify SS in part #


15/16" Grid with Tegular Tile



15/16" Grid with Tegular Tile:
Specify G1 in part #


- DRYWALL RECESSED CEILING

Flanged Trim




Exposed Flange Detail:
Specify FT in part #

Spackle Flanged Trim




Specify SF in part #

Rotating Crossbar




Rotating Crossbar is provided
with FT and SF type
as standard


Drywall




T-bar (G-1)



Screw Slot (SS)




CW90



ARCHITECTURAL LINEAR RECESSED

CUBE2-SF


All dimensions are in inches (millimeters).

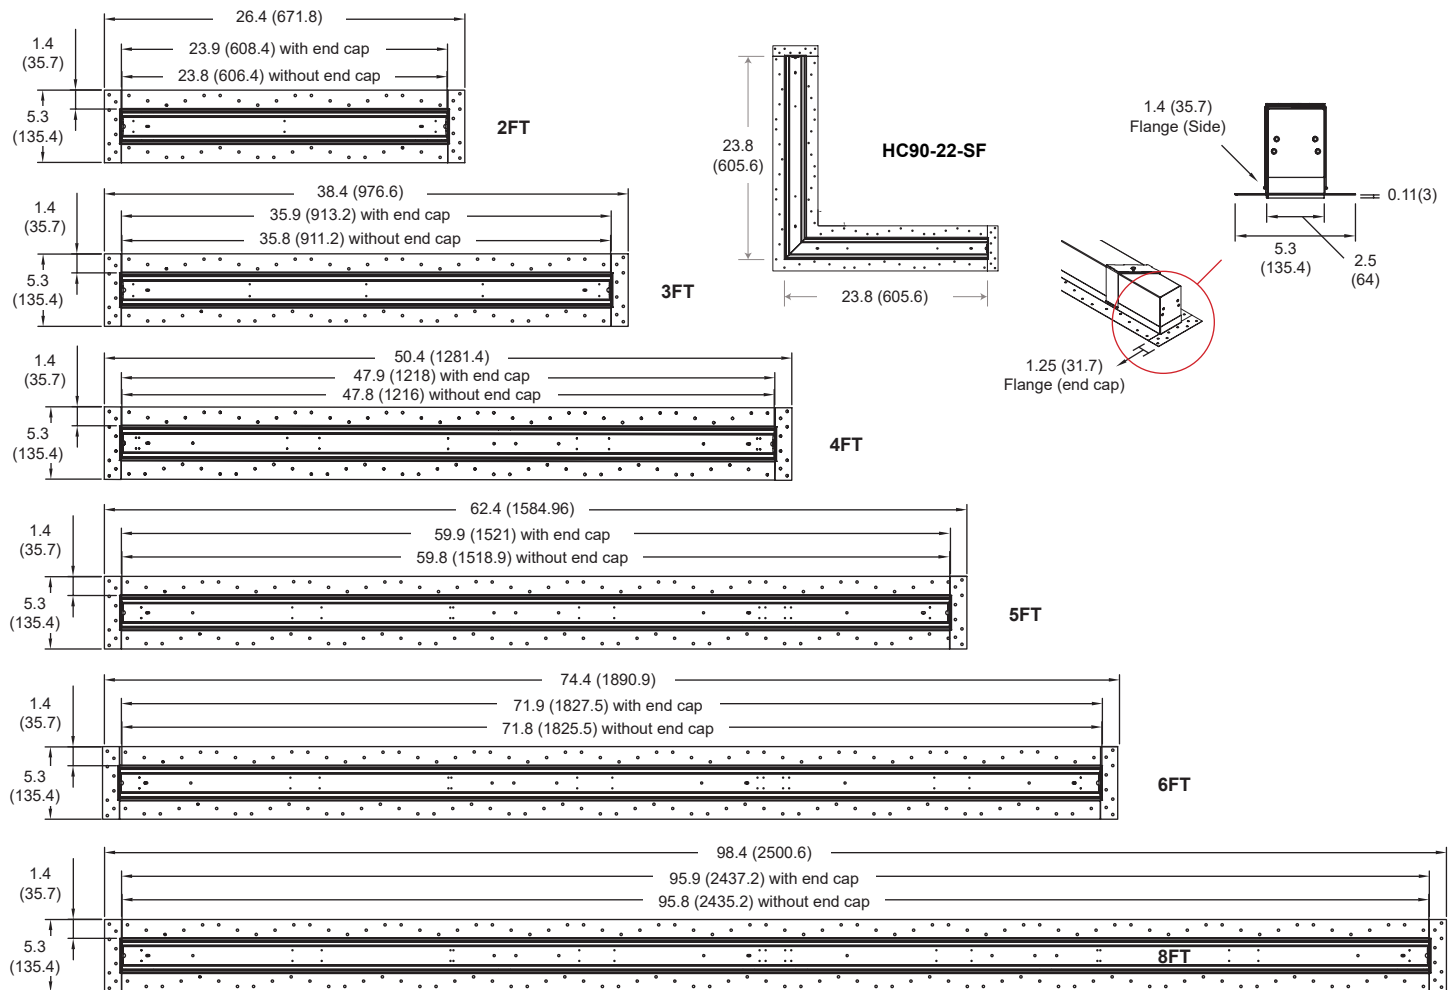

CUBE2-SS

* All -CONs are designed to fit the standard ceiling grid.


All dimensions are in inches (millimeters).

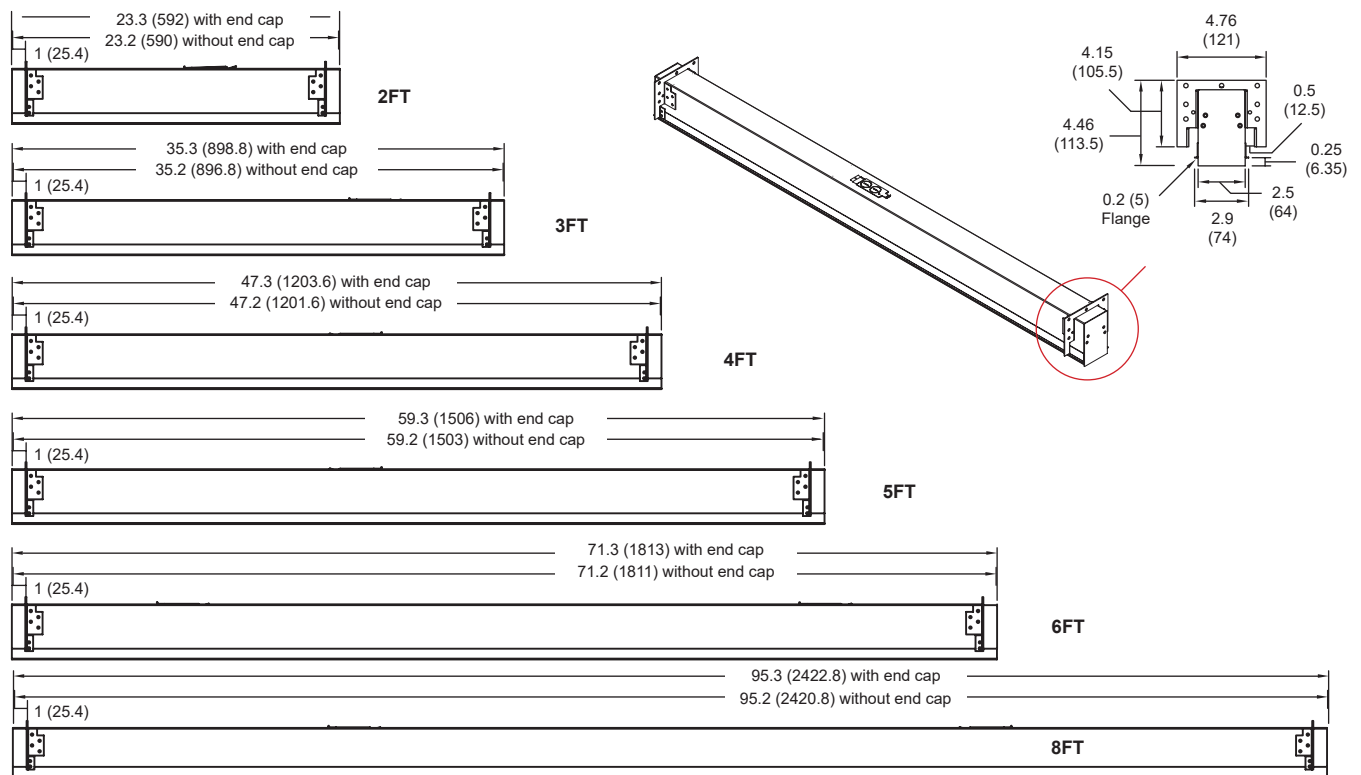


* All -CONs are designed to fit the standard ceiling grid.

All dimensions are in inches (millimeters).

CUBE2-G1




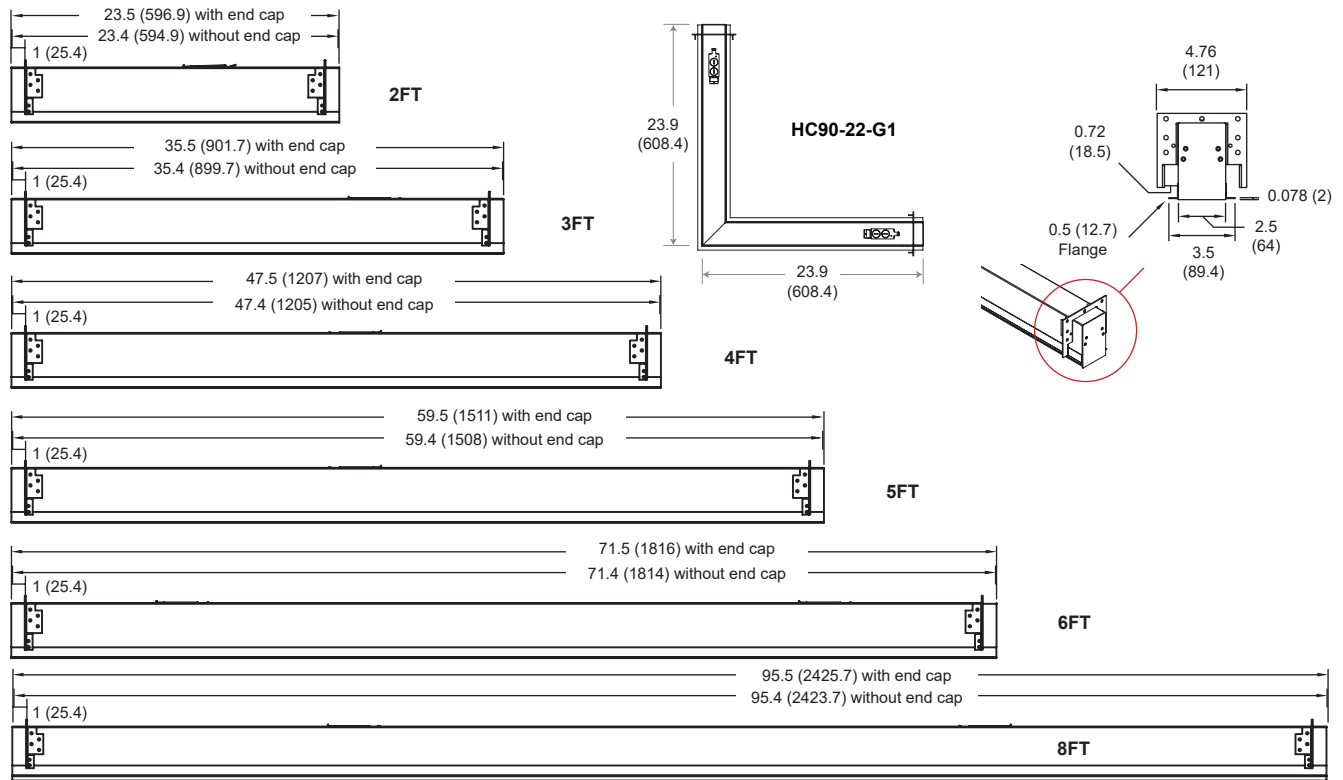


CUBE2-FT

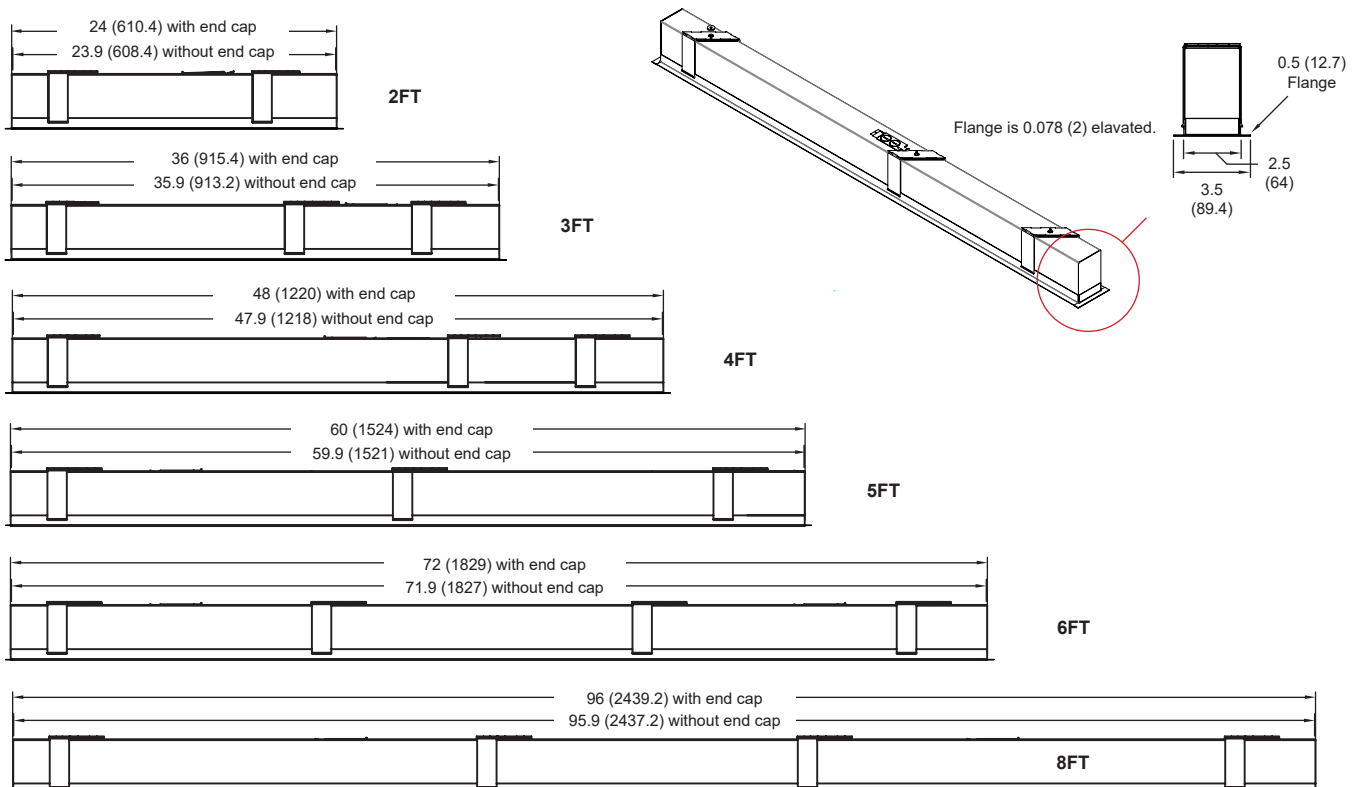

CUBE2

- LIT CONNECTOR

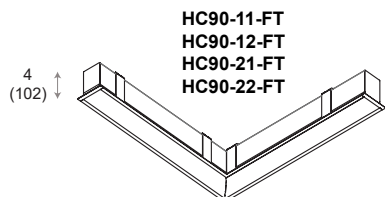

* See a separate CUBE2-HC90 spec sheet to find more information.

* See a separate CUBE2-HC90 spec sheet to find more information.

COMPATIBLE DIMMER SWITCH (TABLE 1)

Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Leviton>	IP710-LFZ
		<Lutron>	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver.
ES566	eldoLED SOLOdrive	<Busch-Jaeger>	2112U-101
		<Jung>	240-10
		<Leviton>	IlumaTech - IP710-DLX
		<Lightoller Controls>	ZP600FAM120
		<Merten>	5729
		<Pass & Seymour>	CD4FB-W
		<Wattstopper>	DCLV1
		<Sensor Switch>	nIO EZ
		<Synergy>	ISD BC
		<ABB>	SD/S 2.16.1
LDE1	Lutron Hi-lume 1% EcoSystem	<Lutron>	Nova T: NTFTV Diva - DVTv-xx, NFTV GRAFIK Eye: GRX-TVI w GRX3503 Energy Savr Node: QSN-4T16-S TVM2 Module
		<Crestron>	GLX-DIMFLV8, GLXP-DIMFLV8, GLPAC-DIMFLV4-*, GLPAC-DIMFLV8-*, GLPP-DIMFLVEX-PM, GLPP-1DIMFLV2EX-PM, GLPP-1DIMFLV3EX-PM, DIN-A08, DIN-4DIMFLV4, CLS-EXP-DIMFLV, CLCI-1DIMFLV2EX
LDE1	Lutron Hi-lume 1% EcoSystem	<Lutron>	PowPak Dimming Modules: RMJ-ECO32-DV-B, FCJ/FCJS-ECO 1,2 Energi Savr Node (120V only): QSN-1ECO-S, QSN-2ECO-S GRAFIK Eye QS/Homeworks QS control unit (120V only): QSGR-J- E(wireless) QSGR- E Quantum Hub (120V only): QP2- _2C/4C/6C/8C Homeworks QS/myRoom Plus power module (120V only): LQSE-2ECO-D
PHSR 3	Philips Xitanium Sensor-Ready	<Ilumra>	Single Rocker Self-Powered Light Switch (on/off, dim-up/down) Ilumra# ZBT-S1AWH Digi-Key# 1082-1033-ND Dual Rocker Self-Powered Light Switch (on/off, dim-up/down, scene1,2) Ilumra# ZBT-S2AWH Digi-Key# 1082-1034-ND
TDM	KEYSTONE	<Lutron>	Diva DV-600P, Skylark S-600P, Ariadni AY-600P, Ariadni TG-603P, Maestro MA-600 (Digital), Diva CFL/LED DVCL-153P, Satin Colors DVSC-600P-SW
		<Leviton>	6641, IlumaTech IP106-1LX, ToggleTouch TGI06-1LW (Digital)
ELV	KEYSTONE	<Lutron>	MAELV-600BL (Digital), DVELV-300P, Skylark SELV-300P
DTO	Philips Xitanium Gen.2 Philips Xitanium Sensor-Ready	<Lutron>	Nova T: #NTSTV-DV http://www.lutron.com/TechnicalDocumentLibrary/NovaTB.pdf See page13.
LTEA2W	Lutron Hi-lume 2-wire (120V forward voltage only)	<Lutron>	Visit http://www.lutron.com/TechnicalDocumentLibrary/369543_ENG.pdf for a list of compatible dimmer switches.

NOTES:

- All devices connected to one FCJ/FCJS-ECO will be controlled together. Devices will dim to the same level as the result of a control command. For more detail on adjusting low-end light level refer to Application Note#556 at www.lutron.com.
- For the Line/Hot (L/H) terminal on the driver, it is preferred not to use the switched hot (red) wire from the control but rather the hot wire directly from the power source.
- Recommended for EasySense System.

ARCHITECTURAL LINEAR RECESSED

CUBE 2 LIT CONNECTOR PATTERNS

The lit connector system allows continuous illumination all the way through the corner section.

- Instruction:
- Please provide sketches illustrating corner types, overall dimensions including corner dimensions, and locations required.
 - HC90, TC, and XC connectors are 90 degree corners (overall, outside dimension).

