

USRHLED

Project Name:	
Type:	



FEATURES:

- Durable 20-gauge steel housing.
- High performance chrome-plated metalized reflector and glass lens for optimal light distribution.
- Long lasting, efficient, ultra bright white LED heads.
- Adjustable heads increase center-to-center spacing.
- 349 lumens per head.

MOUNTING:

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Suitable for wall or ceiling mount.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.

ELECTRICAL:

- Powered from low voltage power source with low voltage wiring (not provided).


LISTING:

- UL listed with compatible product listed in the chart.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- 5 years limited warranty.
- NFPA 70 compliant.

COMPATIBILITY CHART

* Reference individual unit equipment specification sheets for remote load capacity availability.

Model	6V
EM1-HO*	V
R-16HO*	V
LEDCAEM	V
EXL-RC*	V
CXTE-RC*	V
NYDXR-27-RC	V
CADXR-650/6100	V

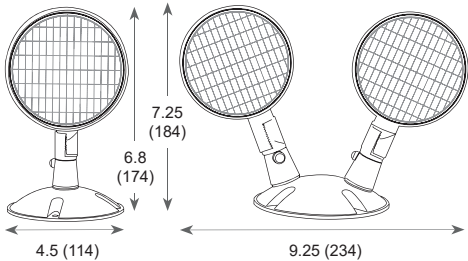

All dimensions are in inches (millimeters).

* SDT versions of the fixtures are not compatible with remote heads.

ORDERING INFORMATION

EXAMPLE: USRHLED-1-6V

MODEL	HEADS	COLOR	VOLTAGE	WATTAGE ¹
USRHLED	1 Single Head 2 Double Head	(Blank) Off White Housing B Black Housing	6V 6VDC	(Blank) 5.3 Watts

NOTES:
1. Wattage rating stated per head.