

LEDSHEM

Project Name:	
Type:	

**FEATURES:**

- Durable 20-gauge steel construction.
- Thermoplastic emergency heads, two lamps standard.
- Available in off white housing.

MOUNTING:

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (Low Voltage Disconnect) prevents battery from deep discharge.
- Remote capacity of 20W standard.
- Runs up to 8 hours without remote heads.

LED:

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.5watt (12 LEDs x 0.125 watt) per head.
- 65 lumens per head.
- High performance chrome-plated metalized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provide optimal center-to-center spacing.

BATTERY:

- Maintenance-free, 6V sealed lead acid rechargeable battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum 90-minute emergency illumination.

LISTING:


- 5 years warranty on all electronics and housing. Battery pro rated for 2 years.
- UL Listed for damp locations. (68°F (20°C) ~ 122°F (50°C)).
- Meets UL924, NFPA 70, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- NFPA 70 compliant.

REMOTE LAMP CAPABILITY

	Maximum Wattage Allowed	
LEDSHEM627	20	

ELECTRICAL INFORMATION

	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
LEDSHEM627	11.0	11.0	0.11A	0.04A

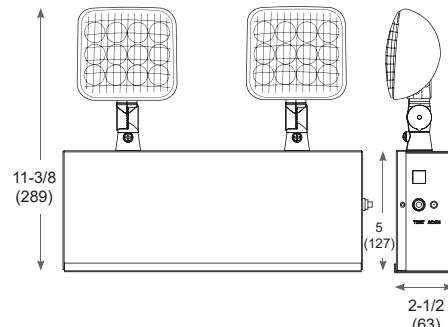

All dimensions are in inches (millimeters).

ORDERING INFORMATION**EXAMPLE: LEDSHEM627**

MODEL	VOLTAGE	# OF HEAD	WATTAGE (for 90 mins.)	HOUSING COLOR
LEDSHEM	6 6V	(Blank) Two Heads	27 27W	(Blank) Off White Housing