

LEDWEM

Project Name:	
Type:	

**FEATURES:**

- Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate housing.
- Cold weather feature available with standard unit for freezer applications.
- Sealed and gasketed housing with hinged cover.
- Sealed test switch.
- Available in gray or black housing.

MOUNTING:

- External mounting brackets for simplified surface mounting.
- Knockouts for conduit applications.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 0°C ~ 50°C operating temperature with a remote head.
- Standard unit without remote loads can be used in cold weather freezer applications (-20°C ~ 50°C).

LAMPS:


- Ultra-bright LED lamps.
- 1.875W per head (15 LED x 0.125 watts)

BATTERY:

- 9.6V maintenance-free and rechargeable Ni-Cad battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery pro rated for five years.
- UL listed for wet locations.
(-4°F ~ 122°F / -20°C ~ 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- NFPA 70 compliant.

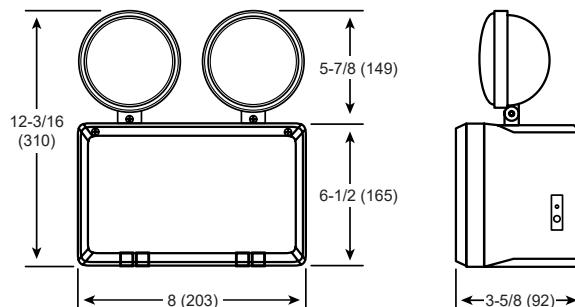

All dimensions are in inches (millimeters).

ORDERING INFORMATION**EXAMPLE: LEDWEM**

MODEL	HOUSING COLOR		OPTIONS	
LEDWEM	(Blank) BK	Gray Housing (Std.) Black Housing	CEC	Title 20 Compliant