

LEDXR

**FEATURES:**

- Injection-molded, engineering grade, 5VA flame retardant, high-impact thermoplastic construction.

MOUNTING:

- Knockouts on the back for wall mount.
- Side and top knockouts for conduit feed applications.

ELECTRICAL:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-set switch for mandated code compliance testing.
- Offers 38.0W, and 88.0W of remote capacity (6V/12V DC output) standard on the 50W, and 100W models.

LAMPS:


- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 6-ft path of egress at 15-ft mounting height.
- 6.0 watt (12 LEDs x 0.50 watt) per head.
- Adjustable glare-free PAR-Type lamp heads with all-inclusive lamp, reflector and lens assembly.

BATTERY:

- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V/12V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

LISTING:

- 5 year warranty on all electronics and housing. Battery pro rated for 2 years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations. (-4°F ~ 104°F / -20°C ~ 40°C)

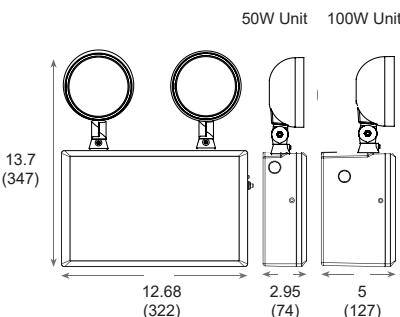

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: LEDXR-6-5

MODEL	VOLTAGE		WATTAGE		HOUSING COLOR	
LEDXR	6 12	6 Volts 12 Volts	5 10	50W 100W	(Blank) BK	Off White Housing (Std.) Black Housing

LEDXR

ELECTRICAL INFORMATION

	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LEDXR65	16.0	16.0	0.15	0.06
LEDXR610	30.0	30.0	0.28	0.12
LEDXR125	16.0	16.0	0.15	0.06
LEDXR1210	30.0	30.0	0.28	0.12

REMOTE LAMP COMPATIBILITY

	Battery	Remote Capacity	Compatible Remote Head Family		
			RHSLED-MV	RH16LED	USRHLED
LEDXR65	6V	38W	X	X	X
LEDXR610	6V	38W	X	X	X
LEDXR125	12V	88W	X	X	
LEDXR1210	12V	88W	X	X	