

LEDTFX-2

Project Name:	
Type:	

**FEATURES:**

- Sealed and gasketed weatherproof lamp heads with high performance chrome-plated metallized reflector and tempered glass lenses for optimal light distribution.
- Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in gray or black finish.
- Sealed and gasketed housing with hinged cover.
- Sealed test switch.

MOUNTING:

- External mounting brackets for simplified wall mounting.
- Knockouts for conduit applications.

ELECTRICAL:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Remote capacity of 3.7W standard in operating temperatures of 0°C – 50°C.

LAMPS:


- Long lasting efficient ultra bright white LED lamp heads.
- 1.875W (15 LEDs x 0.125) per head.

BATTERY:

- 9.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

LISTING:

- 5 year warranty on all electronics and housing. Battery prorated for 5 years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations. (-4°F ~ 122°F / -20°C ~ 50°C)

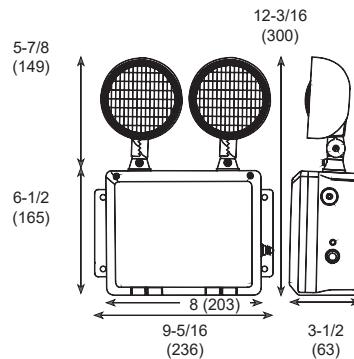

All dimensions are in inches (millimeters).

ORDERING INFORMATION

EXAMPLE: LEDTFX-2

MODEL	HOUSING COLOR		OPTIONS	
LEDTFX-2	(Blank) BK	Gray Housing (Std.) Black Housing	CEC	Title 20 Compliant