

TED

**APPLICATION**

Ideal for commercial and industrial facilities where economy, appearance and the ultimate ease of installation and maintenance are desired. LED die-cast aluminum series utilizes a unique illumination design in an architecturally pleasing housing.

FEATURES:

- Low Profile thin aluminum housing with universal mounting kit.
- Innovative snap-together design allows for fast and easy installation.
- Letters 6" height with 3/4" stroke.
- Field selectable knockout Chevron directional indicators.
- 90+ minute emergency operation.
- Available in white, black or aluminum housing.

MOUNTING:

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate and power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

LAMPS:


- LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- Ultra-bright, energy efficient, long-life Red or Green LEDs with more than 10 year lifecycle.
- LEDs have a minimum rated lamp life of 100,000 hours.

BATTERY:

- Maintenance-free and rechargeable Ni-Cad battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

LISTING:

- 5 years limited warranty on materials and all electronics. Battery pro rated for five years.
- UL listed for damp locations.
(32°F ~ 122°F / 0°C ~ 50°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.
- NFPA 70 compliant.

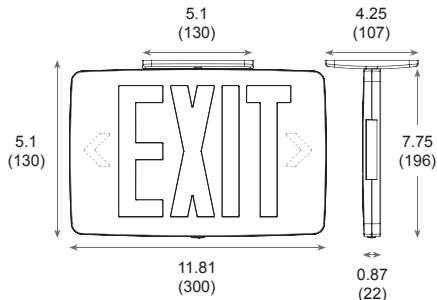

All dimensions are in inches (millimeters).

ELECTRICAL INFORMATION

| | Input Watts (W) | Input Amps (A) |
|-------------|-----------------|----------------|
| Red / Green | 120V | 1.0W |
| | 277V | 1.0W |
| | 0.010A | 0.010A |

ORDERING INFORMATION

EXAMPLE: TED-S-R-1-AL

| MODEL | # OF FACE | LETTER | OPERATION | HOUSING COLOR | OPTIONS | | | | | |
|------------|----------------------|------------------|----------------------|---------------|----------------------------|----------------------------|-------------------------------------|--|--|---|
| TED | S D | Single Double | R G | Red Green | (Blank) 1 | AC-only Battery Back up | AL WH BK | Aluminum Face / Aluminum Housing White Face / White Housing Black Face / Black Housing | WG-1 PCS-1 BG-1 | Steel Wire Guard (13.5" x 15" x 6") Polycarbonate Guard (3.25" x 9" x 2.75") Polycarbonate Vandal Shield Guard (15" x 22" x 8") |