

FLPL100-2G-LA

Project Name:	
Type:	



FEATURES:


- Install FLPL100-2G-LA photoluminescent EXIT signs only in locations, where an external illumination source is present, is deemed reliable, and is supplied by a circuit not controlled by automatic timers or sensors, and whose controls are accessible only to authorized personnel.
- Periodically clean the photoluminescent EXIT sign face with a damp cloth. Do not use any thinners or solvents on the sign face.
- INDOOR use only. Do not expose to direct sunlight, liquid spray, or temperatures outside the range 10°C - 40°C (50°F-104°F).
- 100 feet viewing distance.
- Red and Green panel available.
- Single or double sided.
- Two self-adhesive chevron stickers are included in case the directional chevron(s) is required.
- Minimum 5 foot candles (54 lux) of LED, fluorescent, metal halide or mercury vapor lighting for 60 minutes.

MOUNTING:

- Mounting hardware for surface, flag, ceiling, or stem mounted included as standard.

LISTING:


- Listed to Standard UL924.
- Listed for indoor.
- IBC-International Building Code
- IFC-International Fire Code
- NFPA 101-Life Safety Code compliant.
- NFPA 5000-Building Construction and Safety Code
- The Joint Commission (TJC)
- GSA (General Service Administration) P100 Facilities Standard
- OSHA 1910.37 (b)(6)

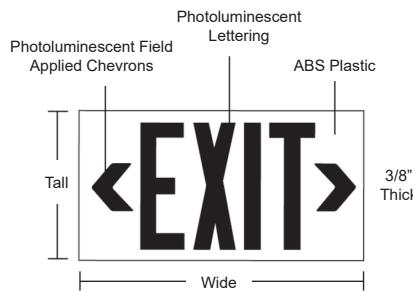

Specifications: FLPL100-2G-LA

Tall: 8-5/8 (219)
 Wide: 15-7/8 (403)

All dimensions are in inches (millimeters).

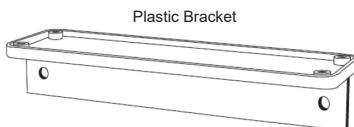

(Mounting Hardware Included)

ORDERING INFORMATION

EXAMPLE: FLPL100-2G-LA-S-R

MODEL	# OF FACE	PANEL COLOR
FLPL100-2G-LA	S Single D Double	R Red plastic body with yellow letter G Green plastic body with yellow letter