

## SXE

Project Name:	
Type:	



## APPLICATION

The steel housing exit signs offer a sleek appearance in a rugged design.

## FEATURES:

- Durable, powder coated 20-gauge steel construction. Premium-grade with white painted heavy duty steel housing with KO's provided for mounting.
- Letters 6" height with 3/4" stroke.
- Steel knockout chevron directional indicators.
- Single or double face configuration.
- 90+ minute emergency operation.
- Available in white or black housing.

## MOUNTING:

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

## ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate and power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

## LAMPS:


- LED lamps are operating in normal (AC input) and emergency (DC input) modes.
- Ultra-bright, energy efficient, long-life Red or Green LED.

## BATTERY:

- Maintenance-free and rechargeable Ni-Cad battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90 minute emergency illumination.

## LISTING:

- 5 years limited warranty on materials and all electronics. Battery pro rated for five years.
- UL listed for damp locations & meets UL924, National Electrical Code, NFPA 70 and the Life Safety Code, NFPA 101.
- ARRA compliant (optional).

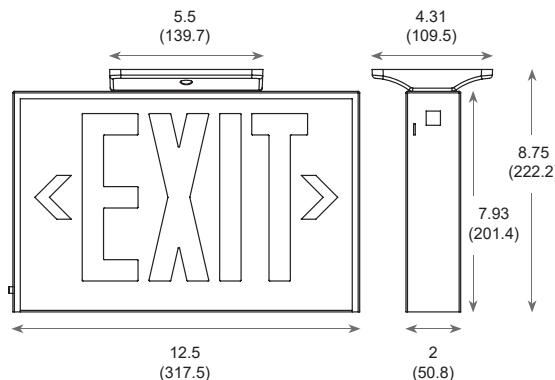

All dimensions are in inches (millimeters).

## ORDERING INFORMATION

EXAMPLE: SXTE-1-R-W-EM

MODEL	# OF FACE	LETTER	HOUSING COLOR	OPERATION	OPTIONS					
SXTE	1 2	Single Double	R G	Red Green	W B	White Housing Black Housing	(Blank) EM	AC-only Battery Back up	WG-1 PCS-1 BG-1 SDT ARRA	Steel Wire Guard (13.5" x 15" x 6") Polycarbonate Guard (3.25" x 9" x 2.75") Polycarbonate Vandal Shield Guard (15" x 22" x 8") Self Diagnostics Assembled in USA for ARRA and BAA compliant