


LINEA

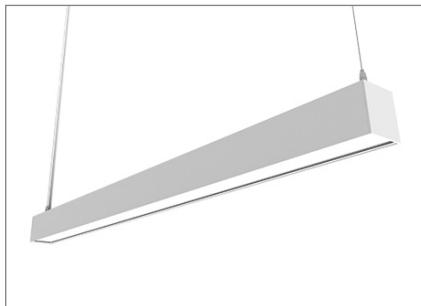

CASambi

APPLICATION

The LINEA is a featured Architectural Linear fixture. Housing is formed by extruded aluminum with field adjustable color temperatures, and up and down distribution. Ideal for commercial, general office, bank, retail and educational environments.

FEATURES:

- Aluminum extruded housing.
- Field AB switching is standard (CCT, up/down control).
- Available in White only.
- Operating temperature: -4°F ~ 122°F (-20°C ~ 50°C)

MOUNTING:

- AC cable pendant mount (AC120 standard).

LENS:

- 0.05" thickness PC frosted lens for both up and down.
- Beam angle 120°.

LED:

- High quality array LEDs.
- CRI >80
- Field adjustable CCT: 3000/3500/4000K
- Max. 50W total (selectable 35W down, 50W up and down, 15W up).
- L70: >50,000 hours

ELECTRICAL:

- 0-10V dimming standard.
- 120-347Vac, 50/60Hz
- THD: <20%
- PF: >0.9
- Class 2

LISTING:

- ETL listed.
- Suitable for damp & dry location.
- 5 years limited warranty.

ORDERING INFORMATION

EXAMPLE: LINEA-4-D35L-U15L-3T-UNV-WH-AC120

MODEL		ROW		SECTION		LED ¹			COLOR TEMP. ¹	
LINEA	(Blank) CON	Individual Mount Continuous Row Mount ³			4 4' Length	D35L-U15L	D35W (1116 lm/ft), U15W (478 lm/ft)			3T Selectable 30/35/40K
		8 8' Length	D70L-U30L	D70W (1116 lm/ft), U30W (478 lm/ft)						

MOUNTING		VOLTAGE		FINISH ²		CEILING TYPE		SUSPENSION LENGTH		
(Blank) W	Pendant Wall Mount	UNV	120-347V	WH BK SL	Glossy White RAL#9010 (Std.) Matte Black RAL#9005 Matte Grey RAL#7035	X1 X2 X3 X5	T-bar ceiling Hard ceiling Sloped ceiling ⁴ 9/16" Screw Slot ceiling	AC48 AC96 AC120	Adjustable Aircraft Cable Canopy 48" L Adjustable Aircraft Cable Canopy 96" L Adjustable Aircraft Cable Canopy 120" L (Std.)	

LED DRIVER		OPTIONS			LIGHTING CONTROL SYSTEM			
(Blank)	0-10V dim to 5% (Std.)	EM8 EM15 EM20 5C	EM 1296 LUMEN ¹ EM 2430 LUMEN ¹ EM 3240 LUMEN ¹ 5" Dia Canopy kit for J-box mount	PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)	CASAMBI	Contact factory for CASAMBI READY options	

NOTES:

1. Contact factory for other emergency ballast options.
2. Matching product finish, cord and canopy finish is standard (Silver finish with white cord & canopy).
3. Max number of fixtures to link for continuous run:
LINEA-4FT: 7pcs @ 120V, 14pcs @ 277V, 20pcs @ 347V
LINEA-8FT: 4pcs @ 120V, 9pcs @ 277V, 11pcs @ 347V
4. The X3 option comes standard with a 5-inch canopy.

LINEA


UP & DOWN DISTRIBUTION

4FT
Down 35W
Down 35W + Up 15W
Up 15W


8FT
Down 70W
Down 70W + Up 30W
Up 30W

DOWN CCT
3000K
3500K
4000K

UP CCT
3000K
3500K
4000K

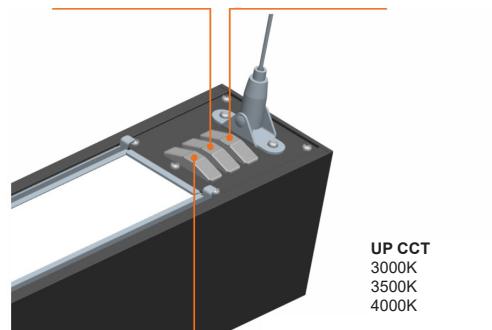


WALL MOUNT OPTION

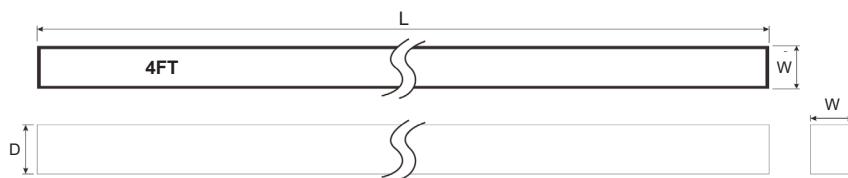

Specifications: LINEA

Length: 4ft: 47.48 (1206)
8ft: 94.72 (2406)
Width: 2.75 (70)
Depth: 3.15 (80)

All dimensions are in inches (millimeters).

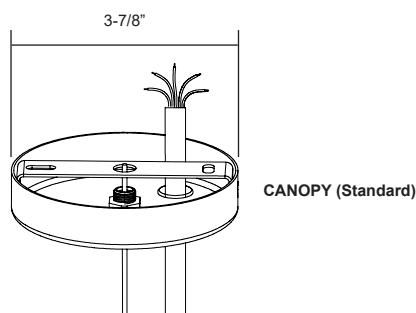


CANOPY (Standard)

CONFIGURATIONS


Series	Length	Model	AC Input	Lumen Output	Lumen Efficiency
LINEA	4FT	D35L-U15L	50W	5500 lm	110 lm/W
	8FT	D70L-U30L	100W	11000 lm	110 lm/W

LINEA-4-D35U15



■ Horiz. Spread: 104.7°

LINEA-4-D70U30



■ Horiz. Spread: 104.7°