

## VETA2

Project Name:

Type:



CASAMBI

## APPLICATION

VETA LED luminaire is a pendant/wall offering a unique design. The ultra-thin semitransparent diffuser precisely controls optimal direct and indirect distributions and provides both efficiency and design statement to any space. A field adjustable color temperature suits perfect design for any commercial, general office, banking, retails and educational environments.

## FEATURES:

- Extruded aluminum housing.
- Field adjustable CCT is standard.
- Field adjustable wattage on 3/4FT.

## MOUNTING:

- Pendant mount.
- Wall / Surface mount.

## LED:

- High quality array LEDs.
- Color Rendering Index: >90
- Field adjustable color temperature: 3000/3500/4000(K)

## FINISH:

- White finish.

## ELECTRICAL:

- 1-10V dimming standard.
- 120-277V, 50/60Hz
- Power Factor: >0.90
- THD: <20%
- Factory pre-wired for individual mount.

## LISTING:

- UL listed.
- Suitable for damp location.
- 5 years warranty.

## CONFIGURATIONS

Series	Size	Model #	AC Input	Lumen Output (30/35/40K)	Lumen Efficiency (30/35/40K)
VETA2	2FT	20LED	20W	2513 lm	100 lm/W
	3FT	3S	20/30/40W	2509/3804/5097 lm	100 lm/W
	4FT		20/30/40W	2369/3624/4880 lm	

## COMPATIBLE DIMMER SWITCH

Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Lutron>	Diva DDTV

## ORDERING INFORMATION

EXAMPLE: VETA2-4-3S-3T-UNV

MODEL	LENGTH		LED		COLOR TEMP.		VOLTAGE		MOUNTING	
VETA2	2	2' Length	20LED	20W LED	-3T	Selectable 30/35/40K	UNV	120-277V	X1-AC48	Pendant for T-bar 15/16", 48" AC cable <sup>1</sup>
	3	3' Length	3S	Selectable 20/30/40W LED					X2-AC48	Pendant for Hard Ceiling, 48" AC cable
	4	4' Length							X3-AC48	Pendant for Sloped Hard Ceiling, 48" AC cable
									X4-AC48	Pendant for T-bar 9/16", 48" AC cable
									XS-AC48	Pendant for Screw Slot Ceiling, 48" AC cable <sup>1</sup>
									W	Wall mount
									S	Surface for drywall
									G1	Direct T-grid ceiling surface mount <sup>2</sup>

## LIGHTING CONTROL SYSTEM

PPA102S

&lt;Bluetooth&gt;

Bluetooth Powerpack (Consult factory for installation location)

CASAMBI

Contact factory for CASAMBI READY options

## NOTES:

1. J-box and T-grid clips are included.
2. Mounting hardware provided.

# VETA2


## FIELD SELECTABLE




FIELD ADJUSTABLE CCT/WATT DIP SWITCH



## WALL MOUNT

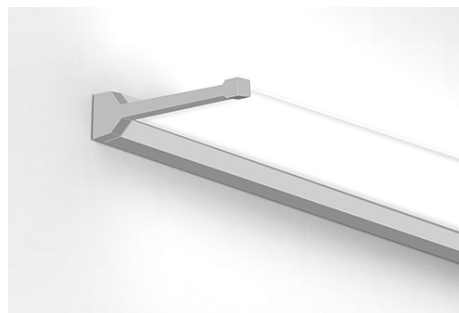

## DIMENSIONS

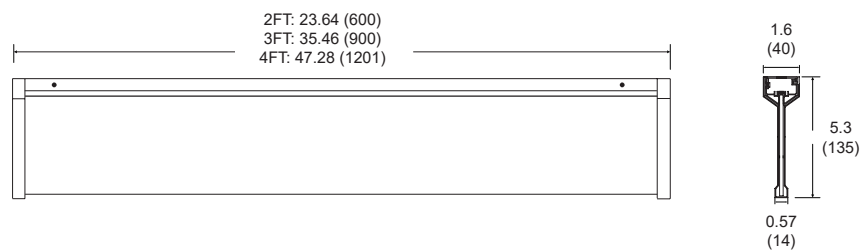

All dimensions are in inches (millimeters).

## DISTRIBUTION

