


VETA1

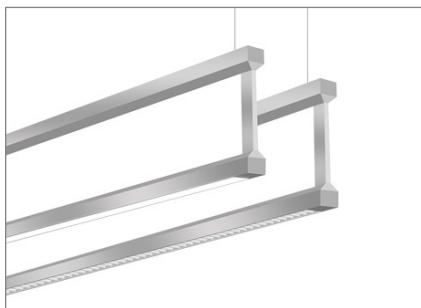

CASAMBI

APPLICATION

VETA LED luminaire is a direct/indirect pendant offering a unique design. The ultra-thin semitransparent diffuser, precisely controls optimal direct and indirect distributions and provides both efficiency and design statement to any space. A field adjustable color temperature suits perfect design for any commercial, general office, banking, retail and educational environments.

FEATURES:

- Extruded aluminum housing.
- Field adjustable CCT is standard.
- 40% downlight, and 30% left and 30% right distribution.

MOUNTING:

- Pendant mount individual or field join continuous run. (max. up to 40ft (10 fixtures) per continuous run)

LED:

- High quality array LEDs.
- Color Rendering Index: >90
- Field adjustable color temperature: 3000/3500/4000(K)

FINISH:

- Silver finish.

ELECTRICAL:

- 1-10V dimming standard.
- 120-277V, 50/60Hz
- Power Factor: >0.90
- THD: <20%

LISTING:

- UL listed.
- Suitable for damp location.
- 5 years warranty.

CONFIGURATIONS

Series	Size	Model #	AC Input	Lumen Output (30/35/40K)	Lumen Efficiency (30/35/40K)
VETA1	4FT	40LED	40W	4207 lm	105 lm/W

COMPATIBLE DIMMER SWITCH

Model #	Brand	Compatible Dimmer Switch
(Blank)	-	<Lutron> Diva DTV

ORDERING INFORMATION

EXAMPLE: VETA1-4-40LED-3T-FR-UNV

MODEL	LENGTH		LED		COLOR TEMP.		BOTTOM		VOLTAGE	
VETA1	4 CON	4' Length Wiring for Continuous mount ¹	40LED	40W LED	-3T	Selectable 30/35/40K	FR LV	Frosted diffuser Louver	UNV	120-277V


MOUNTING		CEILING TYPE		SUSPENSION LENGTH		LED DRIVER		LIGHTING CONTROL SYSTEM		
P	Pendant (Std.)	X1 X2 X4 X5	15/16" grid T-bar Ceiling Hard Ceiling 9/16" grid T-bar Ceiling 9/16" Screw Slot ceiling	AC48	Adjustable Aircraft Cable Canopy 48" L	(Blank) EXT	Integrated LED driver (Std.) External LED driver	PPA102S	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location)	CASAMBI

NOTES:


1. Fixtures come with built-in linkable kits as standard.

VETA1

BOTTOM STYLES

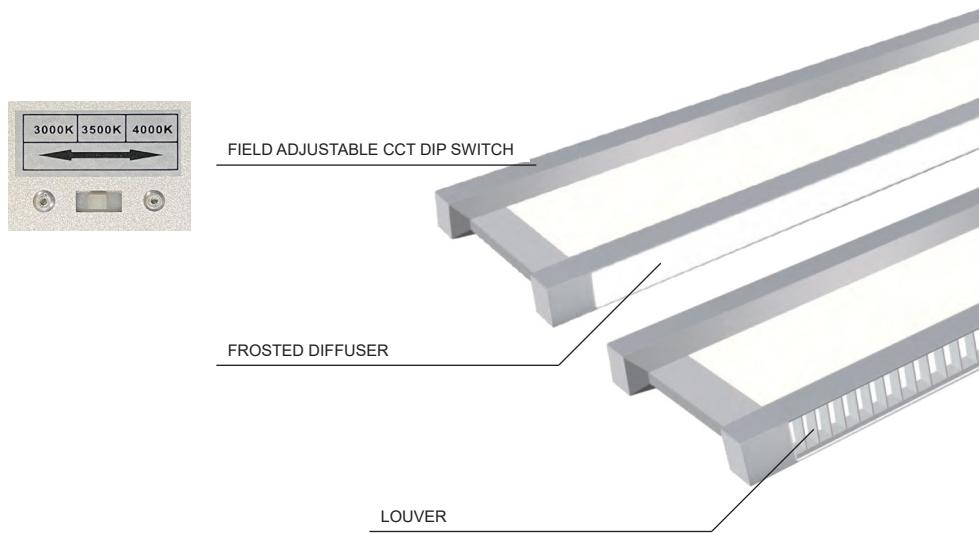


DIMENSIONS

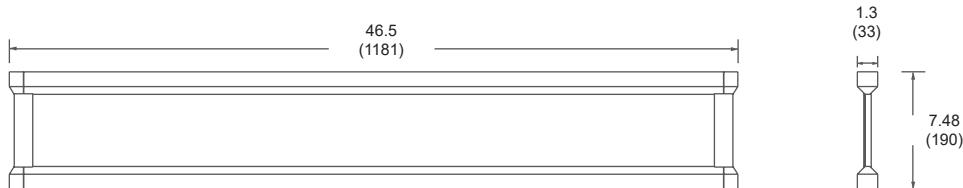

All dimensions are in inches (millimeters).

Standard Driver Box (EXT option)

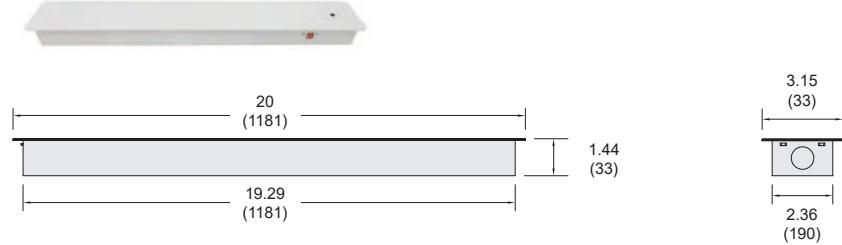

VETA1

DISTRIBUTION

