


TP LED

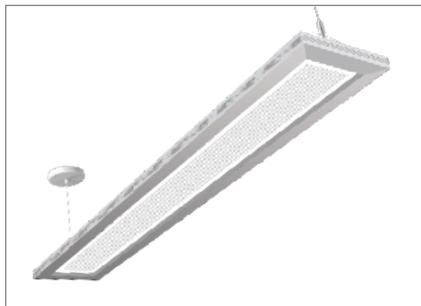

CASAMBI

APPLICATION

TP LED luminaire is a direct/indirect pendant offering a unique design. The transparent diffuser in the center provides both efficiency and design statement to any space. A field adjustable color temperature suits perfect design for any commercial, general office, banking, retail and educational environments.

FEATURES:

- Downlight 53.4%, Uplight 46.6%.

MOUNTING:

- Pendant mount.

LED:

- High quality array LEDs.
- Color Rendering Index: >80
- Field adjustable color temperature: 3000/3500/4000(K)

FINISH:

- White finish.

ELECTRICAL:

- 0-10V dimming.
- 120-277V, 50/60Hz
- Power Factor: >0.90
- THD: <20%

LISTING:

- UL listed.
- DLC listed.
- Suitable for damp location.
- 5 years warranty.

CONFIGURATIONS

Series	Size	Model #	AC Input	Lumen Output (30/35/40K)	Lumen Efficiency (30/35/40K)
TP	4FT	40LED	40W	4254 lm	106.35 lm/W
	8FT	80LED	80W	8508 lm	106.35 lm/W

ORDERING INFORMATION

EXAMPLE: TP-IND-4-40LED-30/35/40K-UNV

MODEL	LENGTH	LED	COLOR TEMP.		VOLTAGE	MOUNTING	
TP-IND TP-CON ¹	4' 4' Length 8' 8' Length	40LED 80LED	40W 80W	-30/35/40K Selectable 30/35/40K	UNV 120-277V	(Blank)	Pendant


¹ Number of circuit(s) should be determined by the customer prior to ordering the continuous run considering the AC input voltage and total run wattage.

CEILING TYPE	SUSPENSION LENGTH	PRESET	OPTIONS	LIGHTING CONTROL SYSTEM	
X1 X2 X5 T-bar Ceiling Hard Ceiling 9/16" Screw Slot ceiling	AC48 Adjustable Aircraft Cable Canopy 48" L	(Blank) PS Non-Preset Preset Request * Factory default setting: 35K	REM15 REM20 15W remote EM for field install 25W remote EM for field install	PPA102S CASAMBI	<Bluetooth> Bluetooth Powerpack (Consult factory for installation location) Contact factory for CASAMBI READY options

NOTES:

1. Max number of fixtures for continuous run: total 36FT @ 120V, total 80FT @ 277V



LED INDOOR ARCHITECTURAL SUSPENDED DIRECT/INDIRECT LINEAR LIGHT

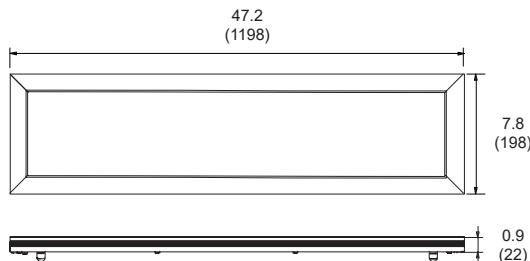


COMPATIBLE DIMMER SWITCH

Model #	Brand	Compatible Dimmer Switch
(Blank)	-	<Lutron> Diva DTV

All dimensions are in inches (millimeters).

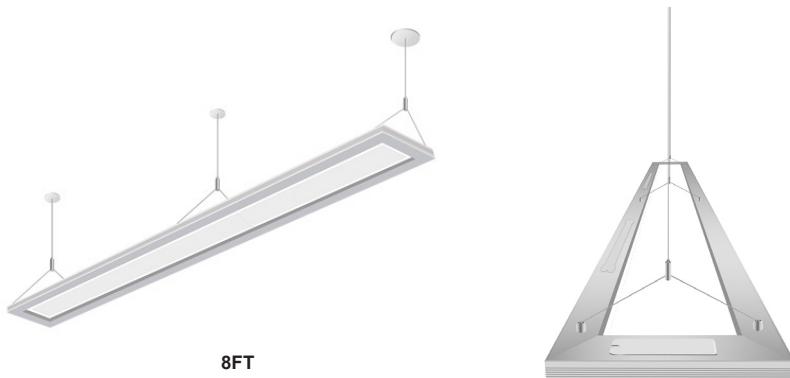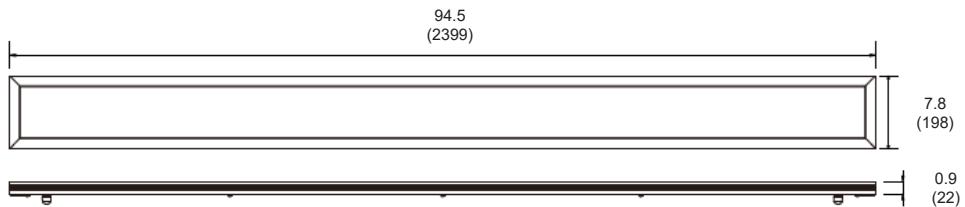

TP-4-40LED

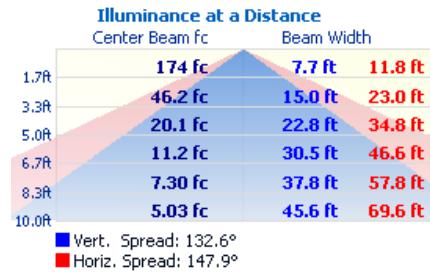

Polar Candela Distribution

