


室内灯具光度数据

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm		
灯具名称: EB1	灯具类型:	灯具重量:
灯具规格:	外型尺寸: 1280*33*55	测试编号:
制造厂商: Utopia Lighting	发光口面:1280*33	保护角:

EB1

光源数据		光度数据		光效: 95.24 lm/W	
..		峰值光强(cd)	1169	S/MH(C0/180)	1.25
标称功率(W)	40	灯具效率(%)	99.9	S/MH(C90/270)	1.24
额定电源电压(V)	100-277	总光通量(lm)	3985.9	η UP, DN(C0-180)	10.2, 39.0
额定光通量(lm)	3988.37	CIE分类	半直接	η UP, DN(C180-360)	9.8, 41.0
灯具内光源数(只)	1	上射光通比(%)	20.0	CIBSE SHR NOM	1.25
实测电源电压(V)	120	下射光通比(%)	80.0	CIBSE SHR MAX	1.35

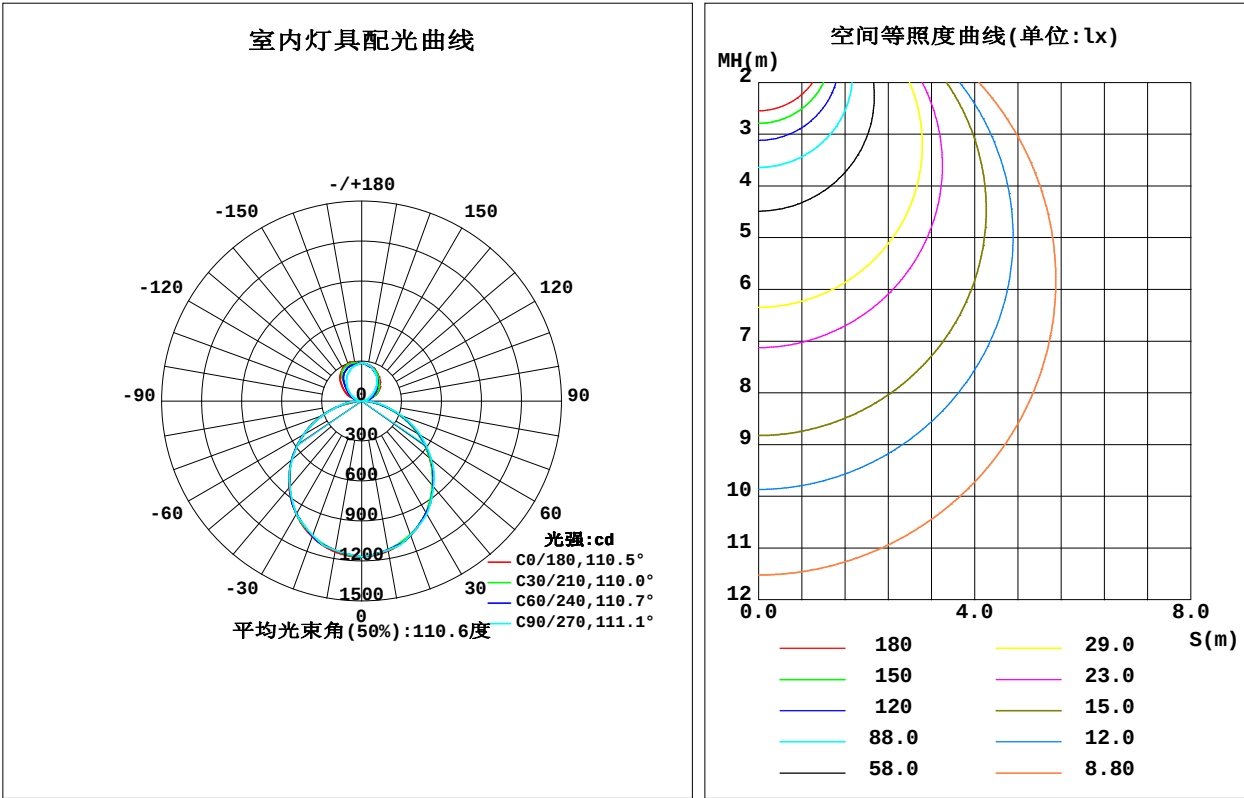


C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注:

灯具环带光通量和亮度限制曲线

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	ϕ 环	ϕ 总	%lum, lamp
5	1161	1153	1152	1155	1164	1155	1152	1153	0- 5	27.74	27.74	0.70, 0.70
10	1143	1132	1135	1136	1149	1137	1136	1133	5- 10	81.94	109.7	2.75, 2.75
15	1113	1105	1118	1111	1122	1112	1120	1107	10- 15	133.3	243.0	6.1, 6.09
20	1074	1075	1072	1082	1085	1083	1074	1077	15- 20	180.2	423.2	10.6, 10.6
25	1025	1022	1025	1031	1038	1031	1027	1024	20- 25	220.1	643.4	16.1, 16.1
30	967.0	962.6	979.2	973.0	982.2	972.5	980.4	964.8	25- 30	252.7	896.1	22.5, 22.5
35	901.2	901.1	909.2	913.3	918.5	911.6	910.0	902.8	30- 35	276.8	1173	29.4, 29.4
40	828.7	835.1	839.2	832.5	847.7	846.2	839.5	836.4	35- 40	290.1	1463	36.7, 36.7
45	750.3	752.6	769.3	667.9	770.7	763.5	769.1	753.6	40- 45	292.0	1755	44, 44
50	666.2	669.8	682.1	530.6	687.8	680.4	680.7	670.7	45- 50	283.1	2038	51.1, 51.1
55	577.9	587.1	594.9	428.2	600.2	597.3	592.3	588.1	50- 55	264.2	2302	57.8, 57.7
60	485.9	490.2	507.8	343.0	508.6	501.2	503.9	491.4	55- 60	238.1	2540	63.7, 63.7
65	390.8	395.5	411.5	265.1	414.4	407.0	406.2	396.9	60- 65	205.8	2746	68.9, 68.9
70	295.6	302.0	315.1	196.2	319.2	311.5	308.5	303.2	65- 70	167.9	2914	73.1, 73.1
75	203.8	209.1	218.8	135.3	216.6	213.9	210.8	209.8	70- 75	126.4	3040	76.3, 76.2
80	116.8	123.2	146.5	79.88	73.23	123.0	140.8	123.3	75- 80	84.80	3125	78.4, 78.4
85	41.84	62.64	74.14	40.19	23.29	61.39	70.71	62.01	80- 85	48.09	3173	79.6, 79.6
90	2.992	3.212	1.821	1.957	1.958	0.9248	0.6582	1.693	85- 90	15.64	3189	80, 80
95	4.106	18.65	10.98	14.65	1.139	11.57	11.31	16.98	90- 95	3.622	3193	80.1, 80
100	18.52	34.76	20.13	28.05	10.79	22.95	21.96	33.06	95-100	9.961	3203	80.3, 80.3
105	40.60	62.17	29.29	55.27	44.13	43.25	32.60	60.93	100-105	19.12	3222	80.8, 80.8
110	73.56	89.60	48.53	83.83	83.85	64.95	51.44	88.96	105-110	30.80	3253	81.6, 81.5
115	121.2	110.1	67.77	110.3	124.3	85.47	70.27	110.1	110-115	43.14	3296	82.7, 82.6
120	144.1	127.3	87.00	137.9	146.4	107.4	89.11	127.7	115-120	52.32	3348	84, 83.9
125	165.4	145.1	110.7	167.9	172.6	130.9	111.8	146.0	120-125	59.76	3408	85.5, 85.4
130	181.9	161.8	134.3	191.6	201.7	159.2	134.5	163.0	125-130	66.20	3474	87.2, 87.1
135	197.1	179.0	158.0	216.4	229.4	192.4	157.2	180.3	130-135	71.00	3545	88.9, 88.9
140	211.4	197.4	180.1	240.0	251.8	235.4	178.7	198.6	135-140	73.63	3619	90.8, 90.7
145	225.1	213.2	202.3	255.6	268.4	253.8	200.2	214.1	140-145	73.40	3692	92.6, 92.6
150	238.9	228.6	224.4	269.9	286.9	265.1	221.7	229.2	145-150	70.03	3762	94.4, 94.3
155	252.7	244.2	239.9	283.5	292.6	279.7	236.8	244.2	150-155	63.81	3826	96, 95.9
160	264.3	257.7	255.4	292.9	301.3	289.2	251.9	249.5	155-160	55.39	3881	97.4, 97.3
165	272.5	265.0	270.9	293.2	302.1	290.2	266.9	257.2	160-165	45.03	3926	98.5, 98.4
170	278.2	272.6	277.0	292.1	295.6	286.1	273.5	252.3	165-170	32.91	3959	99.3, 99.3
175	283.7	280.6	283.1	289.8	284.5	280.6	280.2	273.8	170-175	19.98	3979	99.8, 99.8
180	289.2	289.2	289.2	289.2	286.8	286.8	286.8	286.8	175-180	6.783	3986	100, 99.9
单位:°									光强:cd			
									单位:lm			

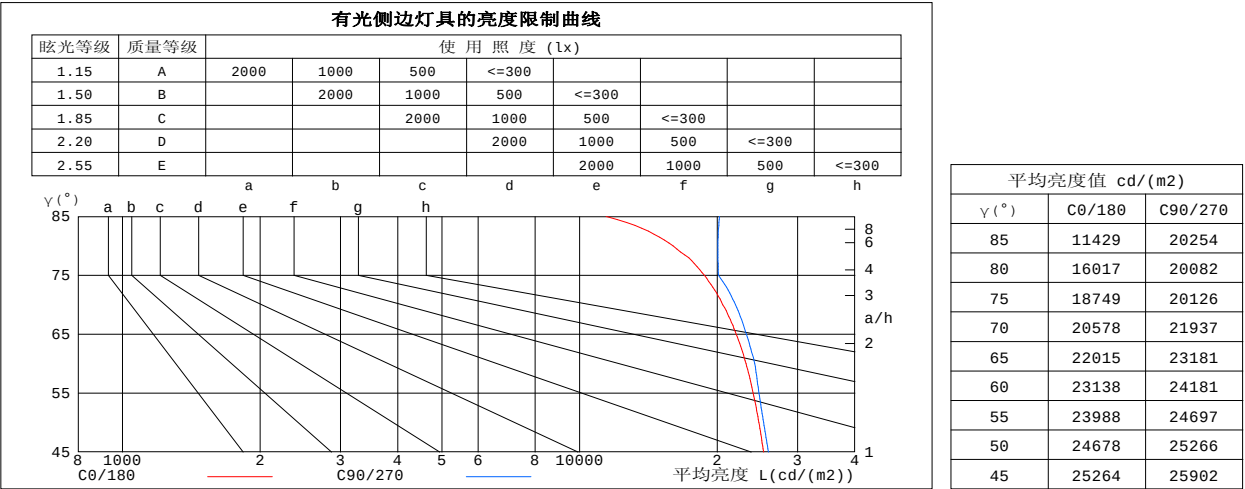


C角度范围： 0度 - 360度
C角度间隔： 5.0度
测试速度：快速
环境温度:25.3℃
测试人员：
测试日期:2024-01-10

γ 角度范围： 0度 - 180度
 γ 角度间隔： 0.5度
测试系统：远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm		
灯具名称: EB1	灯具类型:	灯具重量:
灯具规格:	外型尺寸: 1280*33*55	测试编号:
制造厂商: Utopia Lighting	发光口面:1280*33	保护角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.14	1.14	1.14	1.09	1.09	1.09	.00	.00	.00	.91	.91	.91	.84	.84	.84	.80
1.0	.00	.96	.92	.95	.92	.88	.88	.85	.82	.80	.78	.76	.74	.72	.70	.67
2.0	.87	.80	.75	.83	.78	.73	.77	.72	.68	.70	.67	.63	.65	.62	.59	.56
3.0	.76	.69	.62	.73	.66	.61	.68	.62	.57	.62	.58	.54	.57	.53	.50	.47
4.0	.68	.59	.53	.65	.57	.51	.60	.54	.49	.55	.50	.46	.51	.47	.43	.40
5.0	.60	.52	.45	.58	.50	.44	.54	.47	.42	.50	.44	.40	.46	.41	.38	.35
6.0	.54	.46	.40	.52	.44	.39	.49	.42	.37	.45	.39	.35	.42	.37	.33	.31
7.0	.49	.41	.35	.47	.40	.34	.44	.37	.32	.41	.35	.31	.38	.33	.29	.27
8.0	.45	.37	.31	.43	.36	.30	.40	.34	.29	.38	.32	.28	.35	.30	.26	.24
9.0	.41	.33	.28	.40	.32	.27	.37	.31	.26	.35	.29	.25	.32	.27	.24	.22
10.0	.38	.30	.25	.37	.29	.25	.34	.28	.24	.32	.27	.23	.30	.25	.22	.20

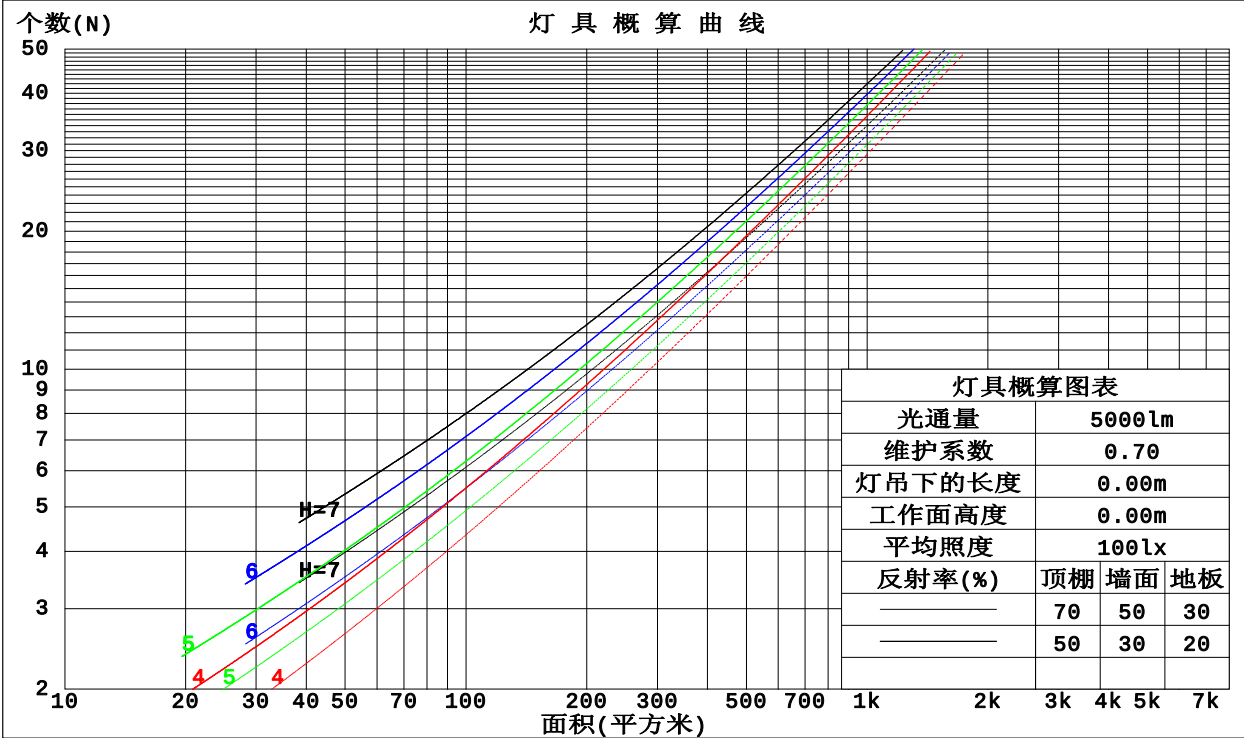

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm					
灯具名称: EB1			灯具类型:		灯具重量:
灯具规格:			外型尺寸: 1280*33*55		测试编号:
制造厂商: Utopia Lighting			发光口面:1280*33		保护角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.297	.169	.053	.284	.162	.051	.259	.149	.047	.237	.136	.044	.216	.125	.040	
2.0	.278	.152	.047	.266	.147	.045	.244	.136	.042	.224	.125	.039	.205	.116	.037	
3.0	.257	.137	.041	.246	.132	.040	.226	.123	.037	.208	.114	.035	.191	.106	.033	
4.0	.238	.123	.036	.228	.119	.035	.210	.111	.033	.193	.104	.031	.177	.096	.029	
5.0	.220	.112	.032	.211	.108	.032	.195	.101	.030	.179	.095	.028	.165	.088	.026	
6.0	.204	.102	.029	.196	.099	.029	.181	.093	.027	.167	.087	.026	.154	.081	.024	
7.0	.190	.094	.027	.183	.091	.026	.169	.086	.025	.156	.080	.023	.144	.075	.022	
8.0	.178	.087	.024	.171	.084	.024	.159	.079	.023	.147	.074	.021	.135	.070	.020	
9.0	.167	.081	.023	.161	.078	.022	.149	.074	.021	.138	.069	.020	.128	.065	.019	
10.0	.157	.075	.021	.151	.073	.020	.141	.069	.019	.130	.065	.018	.121	.061	.017	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.343	.343	.343	.293	.293	.293	.200	.200	.200	.115	.115	.115	.037	.037	.037	
1.0	.333	.310	.289	.285	.266	.249	.195	.183	.172	.112	.106	.100	.036	.034	.032	
2.0	.325	.286	.254	.278	.247	.220	.191	.171	.153	.110	.099	.090	.035	.032	.029	
3.0	.317	.269	.231	.272	.232	.201	.187	.162	.141	.108	.094	.083	.035	.031	.027	
4.0	.310	.257	.216	.266	.222	.188	.183	.155	.132	.106	.091	.078	.034	.029	.026	
5.0	.303	.247	.205	.260	.213	.179	.179	.149	.126	.104	.088	.075	.033	.029	.025	
6.0	.296	.239	.197	.255	.207	.172	.176	.145	.122	.102	.085	.072	.033	.028	.024	
7.0	.290	.232	.192	.249	.201	.167	.172	.141	.118	.100	.083	.070	.032	.027	.023	
8.0	.284	.227	.187	.244	.196	.163	.169	.138	.116	.098	.081	.069	.032	.027	.023	
9.0	.278	.222	.184	.239	.193	.161	.166	.135	.114	.097	.080	.068	.031	.026	.023	
10.0	.272	.218	.181	.235	.189	.158	.163	.133	.112	.095	.079	.067	.031	.026	.022	

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm												
灯具名称: EB1					灯具类型:			灯具重量:				
灯具规格:					外型尺寸: 1280*33*55			测试编号:				
制造厂商: Utopia Lighting					发光口面:1280*33			保护角:				
反射比:	天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
	墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
	工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
房间尺寸		交叉(Viewed crosswise)					向前(Viewed endwise)					
x = 2H y = 2H	2H	22.8	24.0	23.3	24.5	25.1	23.0	24.2	23.5	24.7	25.3	
	3H	24.2	25.3	24.7	25.8	26.4	24.4	25.5	25.0	26.1	26.7	
	4H	24.7	25.8	25.3	26.3	27.0	25.0	26.1	25.6	26.6	27.3	
	6H	25.0	26.0	25.6	26.6	27.3	25.5	26.4	26.0	27.0	27.7	
	8H	25.1	26.1	25.7	26.7	27.3	25.6	26.6	26.2	27.2	27.9	
	12H	25.1	26.1	25.8	26.7	27.4	25.8	26.7	26.4	27.3	28.0	
	4H	2H	23.3	24.3	23.9	24.9	25.6	23.4	24.5	24.0	25.1	25.7
		3H	24.9	25.8	25.5	26.4	27.1	25.1	26.0	25.7	26.6	27.3
		4H	25.5	26.3	26.1	26.9	27.7	25.8	26.6	26.4	27.2	28.0
		6H	25.9	26.7	26.6	27.3	28.1	26.4	27.1	27.0	27.7	28.5
		8H	26.1	26.7	26.7	27.4	28.2	26.6	27.3	27.3	27.9	28.7
		12H	26.1	26.7	26.8	27.4	28.2	26.8	27.4	27.5	28.1	28.9
	8H	4H	25.7	26.4	26.4	27.0	27.8	25.9	26.6	26.6	27.3	28.1
		6H	26.3	26.8	27.0	27.5	28.3	26.7	27.2	27.4	27.9	28.8
		8H	26.4	26.9	27.2	27.7	28.5	27.0	27.5	27.7	28.2	29.1
		12H	26.5	27.0	27.3	27.7	28.6	27.3	27.7	28.0	28.5	29.3
	12H	4H	25.7	26.3	26.4	27.0	27.8	25.9	26.5	26.6	27.2	28.0
		6H	26.3	26.8	27.0	27.5	28.4	26.7	27.2	27.4	27.9	28.7
		8H	26.5	26.9	27.3	27.7	28.6	27.1	27.5	27.8	28.2	29.1
不同间隔布灯时, 观察者位置引起的UGR变化:												
S = 1.0H		+ 0.2 / - 0.2					+ 0.2 / - 0.2					
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.2					

依据CIE Pub.117计算, 表格已按3988lm光源光通进行修正(8log(F/F0) = 4.8).

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm		
灯具名称: EB1	灯具类型:	灯具重量:
灯具规格:	外型尺寸: 1280*33*55	测试编号:
制造厂商: Utopia Lighting	发光口面:1280*33	保护角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) k(RI) x RCR = 5									
k = 0.60	53	41	35	51	41	34	49	39	33	27
0.80	62	51	44	60	50	43	57	48	42	34
1.00	71	59	52	68	58	51	64	57	49	40
1.25	78	67	60	75	65	59	70	62	56	46
1.50	83	73	65	79	70	64	74	67	61	50
2.00	89	81	74	86	78	72	80	73	68	56
2.50	93	85	79	90	83	77	83	77	73	60
3.00	97	90	84	93	87	82	86	81	77	63
4.00	101	95	90	97	92	87	89	85	82	67
5.00	103	98	94	99	95	91	91	88	85	69
ROOM INDEX	UF(总)									UF(直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距离比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注:

灯 具 等 光 强 曲 线

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm		
灯具名称: EB1	灯具类型:	灯具重量:
灯具规格:	外型尺寸: 1280*33*55	测试编号:
制造厂商: Utopia Lighting	发光口面:1280*33	保护角:

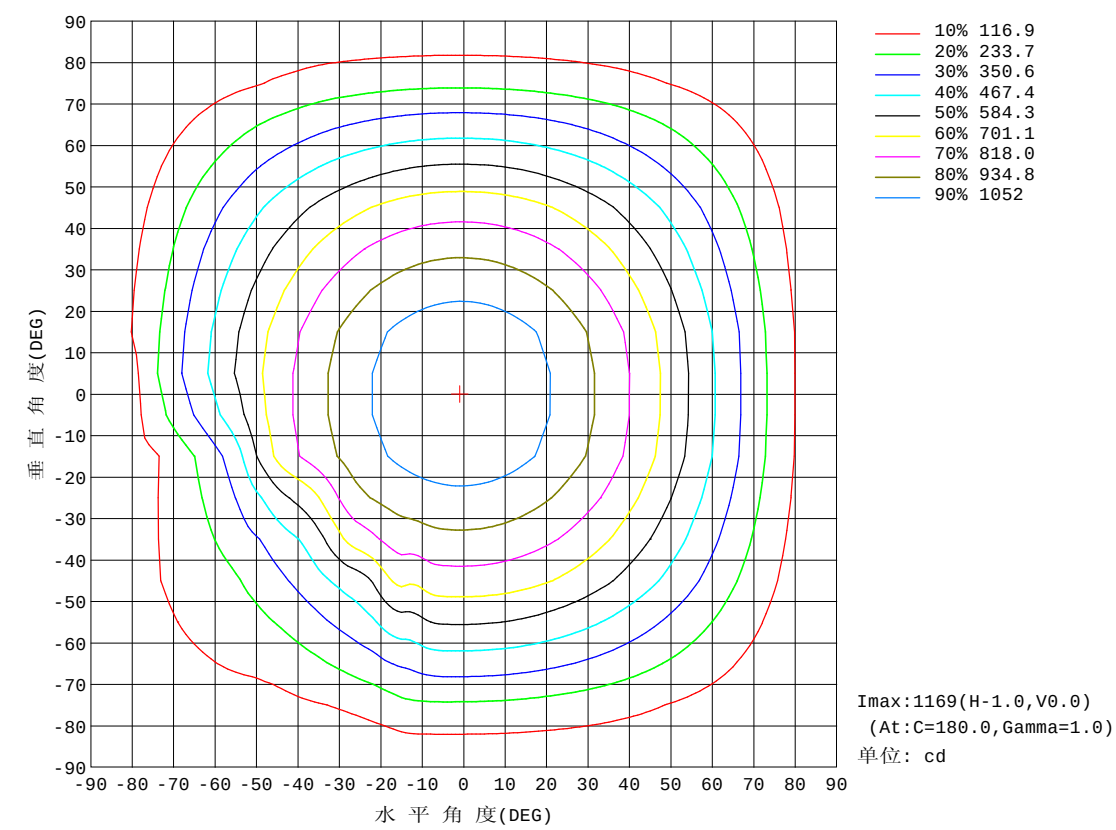


C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm		
灯具名称: EB1	灯具类型:	灯具重量:
灯具规格:	外型尺寸: 1280*33*55	测试编号:
制造厂商: Utopia Lighting	发光口面:1280*33	保护角:

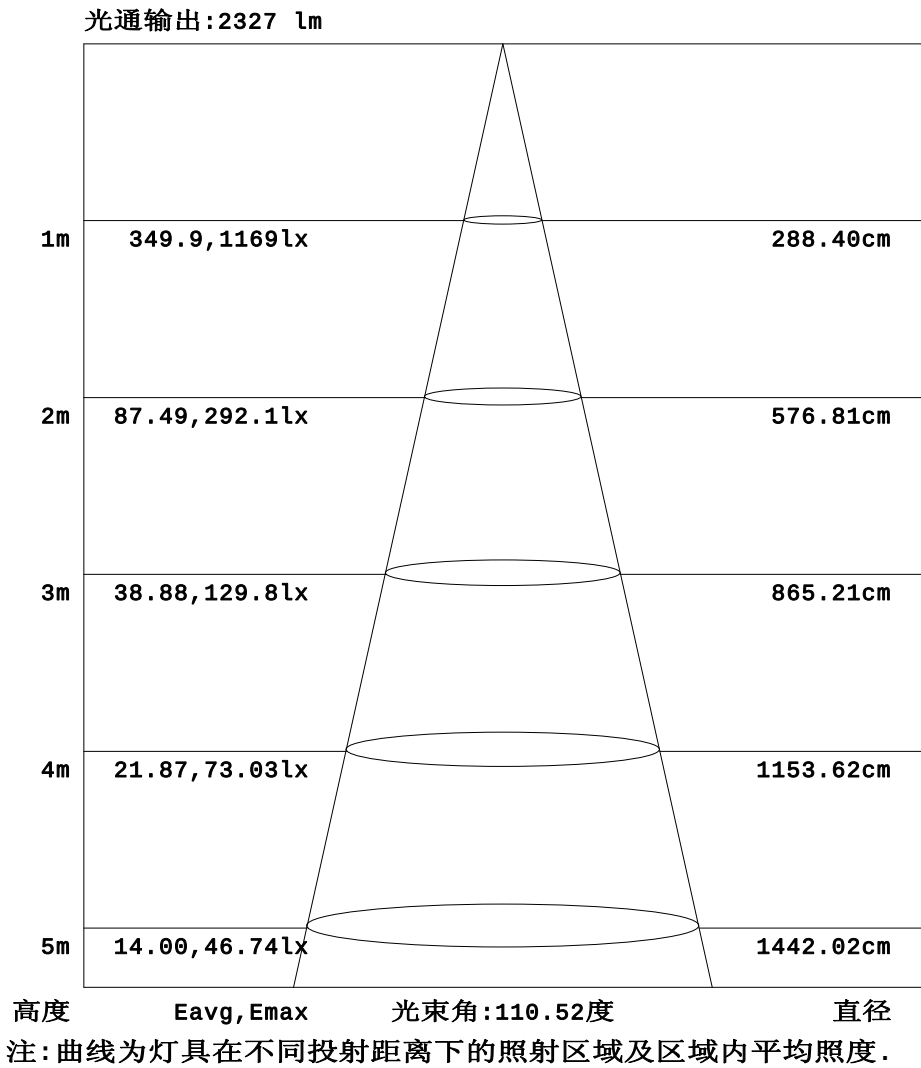


C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注:

平面等照度曲线

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm		
灯具名称: EB1	灯具类型:	灯具重量:
灯具规格:	外型尺寸: 1280*33*55	测试编号:
制造厂商: Utopia Lighting	发光口面:1280*33	保护角:

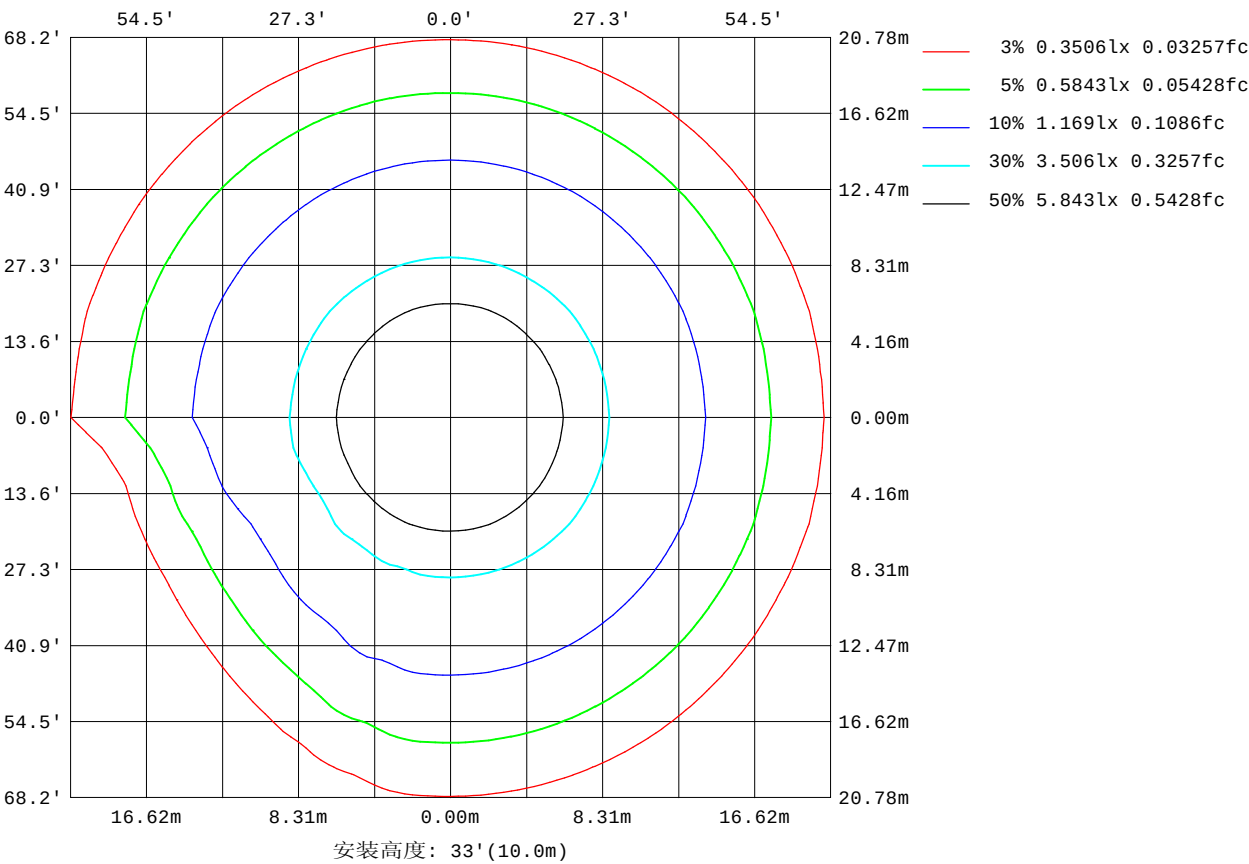

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

LED筒灯平均亮度报告

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm		
灯具名称: EB1	灯具类型:	灯具重量:
灯具规格:	外型尺寸: 1280*33*55	测试编号:
制造厂商: Utopia Lighting	发光口面:1280*33	保护角:


平均亮度	数值(cd/m2)
L横(65)av	22682
L横(75)av	19338
L横(85)av	8895
L纵(65)av	23033
L纵(75)av	19760
L纵(85)av	19785
L45(65)av	20627
L45(75)av	17665
L45(85)av	15451

注:依据标准 GB/T 29293-2012 计算

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注:

平面照度曲线

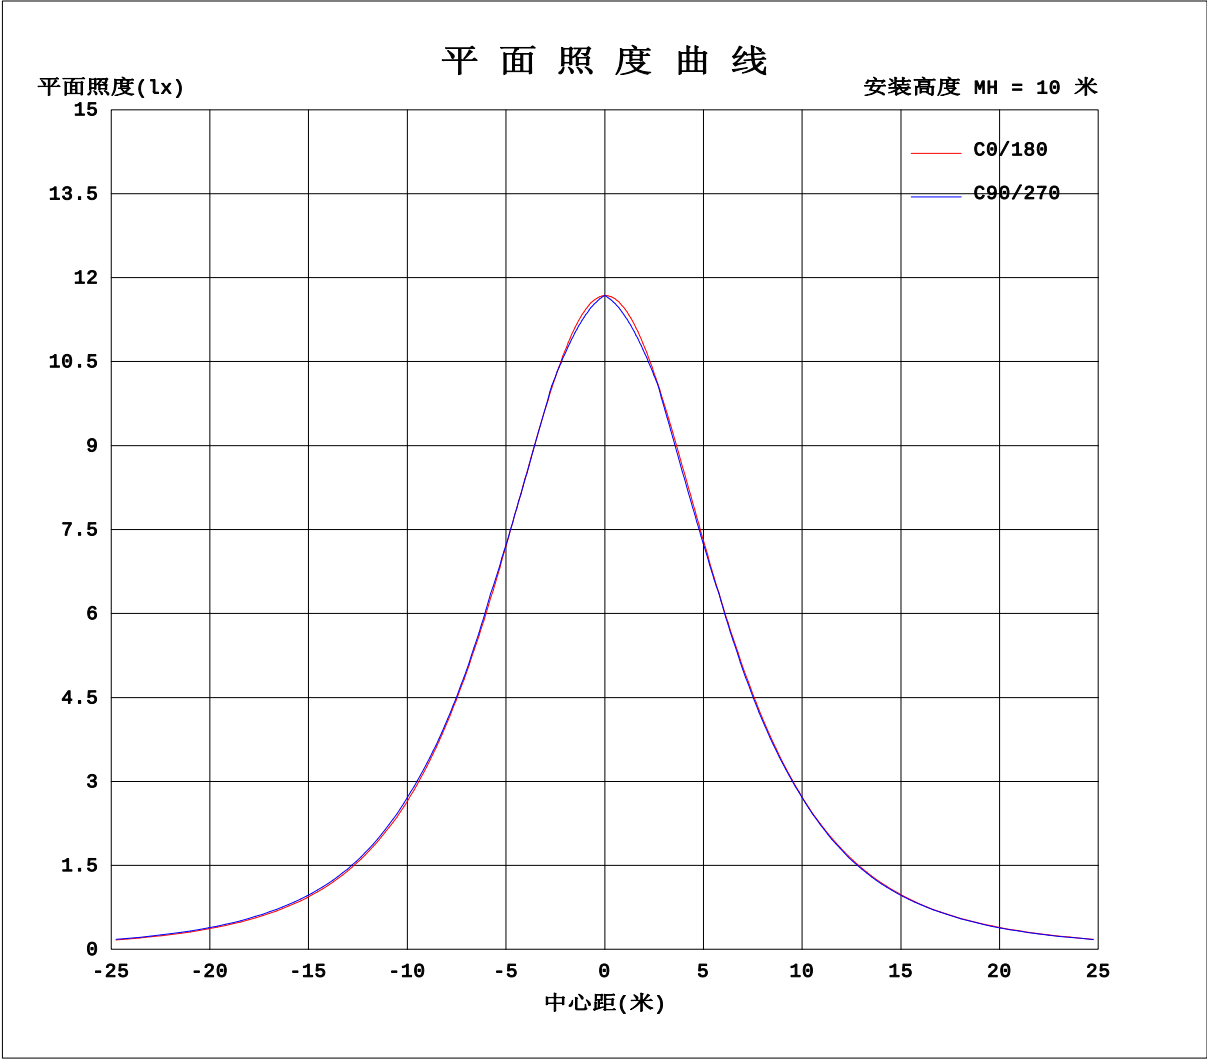

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm		
灯具名称: EB1	灯具类型:	灯具重量:
灯具规格:	外型尺寸: 1280*33*55	测试编号:
制造厂商: Utopia Lighting	发光口面:1280*33	保护角:

表--1																		单位: cd	
C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
5	1161	1160	1159	1157	1156	1155	1155	1154	1153	1153	1152	1152	1152	1152	1151	1151	1151	1151	1152
10	1143	1140	1138	1136	1134	1133	1132	1132	1132	1132	1132	1132	1133	1133	1133	1134	1134	1134	1135
15	1113	1110	1107	1104	1103	1102	1103	1103	1104	1105	1107	1109	1111	1112	1114	1115	1116	1117	1118
20	1074	1069	1066	1064	1063	1064	1065	1068	1071	1075	1075	1073	1072	1072	1071	1071	1071	1071	1072
25	1025	1019	1016	1015	1015	1018	1022	1027	1024	1022	1021	1021	1021	1021	1022	1023	1024	1025	1025
30	967	961	958	958	961	966	967	964	962	963	964	966	968	970	973	975	977	978	979
35	901	895	893	894	900	901	898	897	898	901	905	909	909	908	908	908	908	909	909
40	829	822	821	825	829	825	825	827	832	835	833	833	833	834	836	837	838	839	839
45	750	744	744	751	747	746	749	755	753	753	753	756	758	761	764	766	768	769	769
50	666	660	663	665	662	665	670	667	667	670	674	678	680	680	680	681	681	682	682
55	578	573	578	575	575	580	577	578	582	587	586	587	588	589	591	592	594	594	595
60	486	482	486	483	487	484	486	491	490	490	492	494	496	499	502	504	506	507	508
65	391	389	389	391	389	391	393	392	393	395	399	401	403	405	407	409	410	411	411
70	296	297	295	294	295	296	296	298	300	302	304	306	307	309	311	312	313	314	315
75	204	204	203	202	201	203	204	206	208	209	210	211	212	213	215	216	217	218	219
80	117	117	116	115	115	118	118	119	119	123	128	132	135	138	141	143	145	146	146
85	41.8	40.8	39.7	40.4	41.7	47.9	52.7	56.6	59.9	62.6	65.0	67.1	68.8	70.2	71.4	72.5	73.4	74.1	74.1
90	2.99	3.59	3.59	3.53	3.50	3.45	3.44	3.36	3.28	3.21	3.14	3.05	2.92	2.74	2.49	2.39	2.32	2.24	1.82
95	4.11	5.00	5.47	6.20	5.72	8.47	11.2	13.8	16.3	18.6	20.5	21.8	22.4	20.0	17.5	15.4	13.6	12.2	11.0
100	18.5	19.6	20.7	21.4	22.8	24.8	26.7	29.1	31.0	34.8	38.3	40.8	41.6	36.9	32.3	28.2	24.9	22.2	20.1
105	40.6	41.6	42.8	44.9	47.3	50.2	52.8	59.0	64.0	62.2	60.9	60.9	59.7	53.7	47.2	41.3	36.3	32.2	29.3
110	73.6	75.2	76.5	79.9	83.6	90.2	87.4	91.9	95.6	89.6	84.2	80.7	76.7	70.6	64.2	58.4	54.1	50.6	48.5
115	121	121	120	121	120	121	119	118	115	110	105	99.2	93.5	87.4	80.9	75.6	71.8	68.9	67.8
120	144	143	144	143	143	141	139	136	132	127	122	117	111	105	98.7	93.4	89.9	87.4	87.0
125	165	163	163	161	160	159	155	152	149	145	140	135	130	125	119	114	111	110	111
130	182	180	179	178	176	174	172	169	165	162	158	154	149	144	140	136	133	132	134
135	197	195	194	194	192	189	188	186	183	179	176	172	168	164	160	157	155	155	158
140	211	209	208	208	208	205	203	201	199	197	194	191	187	184	181	178	177	177	180
145	225	223	222	221	222	220	218	216	215	213	212	210	208	204	202	199	198	199	202
150	239	237	236	235	235	236	235	232	231	229	227	226	224	222	221	220	220	221	224
155	253	251	249	248	248	248	248	248	246	244	242	240	239	237	236	235	236	237	240
160	264	263	261	260	259	259	258	258	258	258	257	255	253	252	251	251	252	254	255
165	273	271	270	269	268	267	267	266	265	265	265	265	265	265	266	266	268	270	271
170	278	277	276	276	275	274	274	273	273	273	273	273	273	273	273	274	275	276	277
175	284	283	283	282	282	281	281	281	281	281	281	281	281	281	282	282	282	283	283
180	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm					
灯具名称: EB1			灯具类型:		灯具重量:
灯具规格:			外型尺寸: 1280*33*55		测试编号:
制造厂商: Utopia Lighting			发光口面:1280*33		保护角:

表--2

单位: cd

C(DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
5	1152	1152	1152	1152	1153	1153	1154	1154	1155	1156	1156	1157	1158	1159	1160	1162	1163	1164	1163
10	1135	1135	1135	1135	1135	1135	1135	1135	1136	1136	1137	1138	1139	1140	1142	1144	1146	1149	1146
15	1118	1118	1118	1117	1116	1115	1114	1112	1111	1110	1110	1110	1110	1111	1113	1115	1119	1122	1119
20	1072	1073	1074	1075	1076	1078	1080	1082	1082	1079	1076	1074	1073	1073	1074	1076	1080	1085	1080
25	1026	1026	1027	1027	1027	1027	1028	1029	1031	1033	1037	1032	1029	1027	1027	1029	1032	1038	1032
30	980	980	979	979	977	976	975	973	973	974	975	979	978	974	972	972	976	982	976
35	910	911	909	906	912	916	920	916	913	910	899	894	906	914	910	909	912	919	911
40	840	841	829	823	835	822	811	819	833	799	770	764	787	832	842	839	841	848	840
45	770	769	743	750	744	702	679	683	668	637	599	612	655	712	767	758	759	771	763
50	683	680	653	667	633	568	541	545	531	504	486	485	524	569	612	632	652	688	680
55	596	590	562	564	523	477	457	443	428	412	402	398	395	428	452	467	521	600	592
60	509	501	468	461	425	398	377	359	343	330	320	314	318	323	328	336	406	509	501
65	413	407	382	368	338	319	298	279	265	255	248	242	239	244	246	246	294	414	408
70	317	313	299	278	253	236	221	208	196	189	185	187	185	191	186	176	186	319	313
75	220	222	215	189	169	158	150	143	135	131	134	142	144	146	145	129	111	217	212
80	148	148	143	122	107	97.9	92.1	87.5	79.9	78.3	84.9	90.4	94.4	98.6	99.1	98.2	81.9	73.2	125
85	74.9	74.9	72.0	61.6	54.2	49.6	46.7	44.3	40.2	40.1	42.3	44.2	45.1	44.8	45.9	47.7	45.5	23.3	47.2
90	2.23	2.00	2.08	1.90	1.89	1.90	1.90	1.90	1.96	2.08	2.05	2.01	1.89	1.83	2.25	2.26	2.03	1.96	0.91
95	12.1	13.5	15.5	17.0	18.6	20.1	18.6	16.7	14.6	11.8	9.64	7.73	5.69	3.55	4.66	3.98	3.73	1.14	2.10
100	22.0	25.0	28.8	32.1	35.0	38.4	35.8	31.9	28.1	23.7	23.0	22.8	21.6	19.1	19.0	19.1	17.3	10.8	11.8
105	31.8	36.7	42.6	48.1	52.7	58.1	57.2	55.1	55.3	56.4	52.5	50.7	48.4	48.0	45.7	44.1	37.7	44.1	24.3
110	50.9	56.1	63.1	69.8	74.7	79.7	82.0	81.2	83.8	87.8	84.3	82.5	86.0	85.8	81.9	76.4	68.8	83.8	55.0
115	70.0	75.3	83.1	91.1	96.5	101	106	108	110	111	111	111	114	114	116	109	105	124	94.0
120	89.2	94.7	103	113	120	127	131	136	138	138	136	134	134	137	133	129	124	146	122
125	114	119	127	136	145	154	159	162	168	166	164	161	158	156	155	153	147	173	154
130	139	144	150	159	169	179	185	188	192	190	189	192	191	187	186	182	179	202	192
135	163	168	174	181	191	200	207	212	216	219	216	215	217	220	221	215	211	229	225
140	185	191	197	204	212	220	227	234	240	243	245	245	246	250	248	246	246	252	249
145	207	213	220	227	234	241	247	252	256	259	263	266	270	272	270	269	268	268	268
150	229	234	240	246	251	257	261	266	270	274	278	282	284	285	285	287	288	287	285
155	243	248	253	259	264	269	274	279	284	288	292	293	294	294	296	297	299	293	291
160	258	262	265	271	275	280	285	289	293	295	297	299	300	302	303	305	306	301	300
165	273	275	277	280	283	286	289	291	293	295	297	299	301	302	304	306	307	302	301
170	278	279	281	283	284	286	288	290	292	294	295	296	298	299	300	302	303	296	295
175	284	284	285	286	287	287	288	289	290	291	291	292	293	294	294	295	296	285	284
180	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289	289	287	287

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm					
灯具名称: EB1			灯具类型:		灯具重量:
灯具规格:			外型尺寸: 1280*33*55		测试编号:
制造厂商: Utopia Lighting			发光口面:1280*33		保护角:

表--3单位: cd

C(DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
5	1162	1160	1159	1158	1157	1157	1156	1155	1155	1154	1154	1153	1153	1153	1152	1152	1152	1152	1152
10	1144	1142	1140	1139	1138	1137	1137	1137	1136	1136	1136	1136	1137	1137	1137	1136	1136	1136	1136
15	1116	1113	1112	1111	1110	1111	1111	1112	1114	1115	1116	1117	1119	1119	1120	1120	1120	1120	1119
20	1077	1074	1073	1074	1075	1077	1080	1083	1083	1081	1079	1077	1076	1075	1075	1074	1074	1073	1073
25	1029	1027	1027	1029	1033	1037	1034	1031	1029	1028	1028	1028	1028	1028	1028	1027	1027	1026	1026
30	972	971	973	978	979	975	973	972	973	974	976	977	979	980	981	981	980	980	978
35	908	909	913	914	910	909	910	912	915	919	917	915	914	913	912	911	910	909	909
40	838	840	843	839	838	840	844	846	843	842	841	841	841	841	841	840	840	839	838
45	762	767	762	761	764	769	766	763	763	763	765	766	768	769	770	769	769	768	767
50	680	681	678	681	685	681	680	680	683	685	686	684	684	683	683	682	681	680	680
55	595	591	593	596	592	592	594	597	595	594	594	593	594	594	594	593	592	592	591
60	502	500	505	500	501	504	502	501	501	501	502	503	504	505	505	505	504	503	503
65	407	410	406	407	408	406	406	407	408	410	409	409	409	408	408	407	406	406	406
70	312	311	312	310	309	312	313	312	312	312	312	311	311	310	310	309	309	308	308
75	212	212	211	211	213	214	214	214	215	216	215	214	213	213	212	212	211	211	210
80	123	122	121	121	121	120	118	123	129	134	136	138	139	140	141	141	141	141	140
85	46.0	44.7	43.9	48.3	52.0	55.1	57.5	61.4	64.2	67.0	68.4	69.2	69.9	70.4	70.7	70.9	70.7	70.6	70.2
90	0.91	0.91	0.91	0.91	0.91	0.98	0.98	0.92	0.85	0.83	0.81	0.78	0.74	0.72	0.70	0.67	0.66	0.68	0.80
95	3.12	3.31	3.26	5.41	6.84	8.21	9.34	11.6	14.0	16.0	16.8	16.6	15.9	15.3	13.1	12.1	11.3	11.8	13.1
100	14.1	15.2	16.4	17.9	18.8	19.0	18.8	22.9	27.7	31.5	32.9	32.3	30.9	29.8	25.4	23.5	22.0	22.8	25.2
105	27.7	32.3	35.4	36.2	38.4	39.3	41.7	43.2	45.6	48.8	50.0	48.8	46.7	44.3	37.8	35.0	32.6	33.9	37.6
110	52.7	55.1	55.6	57.4	58.5	62.4	64.3	65.0	65.4	68.1	68.9	67.2	66.2	61.1	57.6	54.0	51.4	52.6	55.7
115	80.5	78.1	76.4	77.0	78.8	81.4	83.8	85.5	85.4	87.7	87.5	86.0	85.4	78.1	77.5	73.0	70.3	71.3	73.7
120	106	101	97.0	98.0	100	103	106	107	108	110	109	107	107	97.4	97.7	92.1	89.1	90.0	92.0
125	144	138	130	124	127	130	130	131	130	133	130	131	133	125	122	116	112	111	112
130	187	181	171	164	157	152	154	159	159	159	155	160	158	153	147	140	134	133	132
135	224	226	214	200	188	183	194	192	197	188	184	186	183	178	171	164	157	155	152
140	249	250	249	237	232	229	228	235	228	219	214	212	204	199	192	186	179	177	173
145	268	270	271	268	261	258	256	254	249	243	238	233	226	220	212	208	200	200	196
150	284	283	282	280	277	273	269	265	262	258	255	249	246	238	233	229	222	222	218
155	289	288	287	287	286	286	284	280	275	271	267	263	255	249	248	243	237	235	235
160	299	298	298	297	295	292	290	289	288	284	278	270	266	264	261	257	252	248	249
165	299	298	296	296	295	294	293	290	287	283	279	278	278	276	274	271	267	262	261
170	294	294	293	291	290	289	288	286	284	282	280	279	278	277	277	276	274	271	267
175	284	283	283	282	282	281	281	281	280	280	281	281	282	282	281	281	280	279	278
180	287	287	287	287	287	287	287	287	287	287	287	287	287	287	287	287	287	287	287

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:120.3V I:0.3492A P:41.85W PF:0.9967 实检光通:3988.37x1 lm																	
灯具名称: EB1									灯具类型:						灯具重量:		
灯具规格:									外型尺寸: 1280*33*55						测试编号:		
制造厂商: Utopia Lighting									发光口面:1280*33						保护角:		

表--4单位: cd

C(DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169				
5	1152	1152	1152	1152	1153	1153	1153	1154	1154	1155	1156	1157	1158	1159	1160				
10	1135	1135	1134	1134	1133	1133	1133	1133	1133	1133	1134	1135	1136	1138	1140				
15	1118	1116	1115	1113	1111	1109	1107	1106	1105	1104	1104	1104	1105	1107	1110				
20	1073	1073	1074	1075	1076	1078	1077	1073	1070	1067	1065	1064	1065	1066	1069				
25	1025	1024	1023	1023	1023	1023	1024	1027	1030	1024	1020	1017	1016	1017	1020				
30	977	975	972	970	968	966	965	965	966	970	968	963	959	959	961				
35	909	909	909	910	911	907	903	900	899	900	903	902	896	894	895				
40	837	836	835	834	834	835	836	833	829	826	827	831	827	823	823				
45	766	763	761	758	756	754	754	754	756	750	747	749	753	746	745				
50	680	679	679	680	678	674	671	668	668	671	666	664	667	664	661				
55	590	589	588	587	587	587	588	584	580	578	581	577	576	579	573				
60	501	499	497	495	494	492	491	492	493	488	486	488	484	487	482				
65	405	404	403	402	401	399	397	396	395	396	394	391	393	390	390				
70	307	307	306	305	305	304	303	302	300	299	300	300	296	296	297				
75	210	210	210	210	210	210	210	209	209	208	207	206	206	205	204				
80	138	137	135	133	130	127	123	120	121	122	122	120	119	120	118				
85	69.6	68.9	67.9	66.7	65.4	63.8	62.0	59.8	57.3	54.2	50.5	45.8	45.2	44.9	45.0				
90	0.91	1.06	1.14	1.26	1.34	1.44	1.69	1.76	1.81	1.85	1.94	1.94	1.95	1.96	1.96				
95	14.7	16.8	19.1	21.4	20.6	19.0	17.0	14.4	11.6	8.76	5.75	3.18	3.94	3.03	2.72				
100	28.4	32.4	36.8	41.2	40.2	37.0	33.1	28.8	26.5	23.9	21.8	19.6	18.3	17.6	17.0				
105	42.3	48.0	54.2	59.9	60.7	60.1	60.9	62.3	56.3	49.8	47.2	44.0	41.8	39.9	39.4				
110	60.0	65.5	71.6	77.3	81.0	84.0	89.0	94.5	89.4	85.1	86.9	80.2	76.5	73.6	73.1				
115	77.6	82.8	88.9	94.6	99.9	105	110	114	117	117	119	118	120	118	119				
120	95.8	101	107	113	118	123	128	132	136	138	140	142	142	143	142				
125	117	121	127	132	137	142	146	149	152	155	159	160	161	163	162				
130	138	142	147	152	156	159	163	166	170	173	174	175	177	178	179				
135	159	163	166	170	174	177	180	184	187	188	189	191	193	193	194				
140	176	180	186	189	192	196	199	200	201	203	205	207	208	208	209				
145	190	198	205	209	212	213	214	215	216	218	220	221	221	221	222				
150	208	215	217	223	226	228	229	231	232	235	235	234	234	235	236				
155	231	219	230	234	235	239	244	246	248	248	248	248	248	249	250				
160	248	245	232	242	248	253	250	250	254	256	256	257	258	259	260				
165	264	261	259	249	242	251	257	260	260	260	259	258	260	261	262				
170	267	268	268	266	262	258	252	248	248	252	257	261	265	268	271				
175	276	275	274	274	273	274	274	274	274	273	273	273	272	272	273				
180	287	287	287	287	287	287	287	287	287	287	287	287	287	287	287				

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0
0.0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
2.5	1166	1166	1165	1164	1164	1163	1163	1162	1162	1161
5.0	1161	1160	1159	1157	1156	1155	1155	1154	1153	1153
7.5	1153	1151	1149	1148	1147	1145	1144	1144	1143	1143
10.0	1143	1140	1138	1136	1134	1133	1132	1132	1132	1132
12.5	1129	1126	1123	1121	1120	1119	1118	1118	1119	1119
15.0	1113	1110	1107	1104	1103	1102	1103	1103	1104	1105
17.5	1095	1091	1087	1085	1084	1084	1085	1086	1088	1091
20.0	1074	1069	1066	1064	1063	1064	1065	1068	1071	1075
22.5	1050	1045	1042	1040	1040	1042	1044	1048	1053	1050
25.0	1025	1019	1016	1015	1015	1018	1022	1027	1024	1022
27.5	996.8	991.1	987.9	987.2	988.9	992.4	998.0	996.0	993.6	992.5
30.0	967.0	961.0	957.9	957.8	960.8	965.7	967.1	963.9	962.5	962.6
32.5	934.8	928.7	926.2	926.9	931.0	937.0	932.9	930.9	930.7	932.0
35.0	901.2	894.9	892.7	894.4	899.6	900.8	897.6	897.0	898.3	901.1
37.5	865.8	859.4	857.7	860.3	867.4	863.3	861.4	862.4	865.3	869.7
40.0	828.7	822.2	821.4	825.3	829.0	824.9	824.5	827.0	831.7	835.1
42.5	790.2	783.9	783.5	788.6	788.6	785.8	787.0	791.3	795.9	793.8
45.0	750.3	744.0	744.5	751.3	747.1	745.9	749.0	755.4	753.0	752.6
47.5	708.9	702.7	704.2	709.7	705.0	705.7	710.8	711.6	710.3	711.1
50.0	666.2	660.4	663.1	665.4	662.3	665.1	669.6	667.2	667.3	669.8
52.5	622.6	617.0	621.0	620.1	619.1	624.1	623.2	622.5	624.6	628.8
55.0	577.9	572.8	578.5	574.6	575.5	579.7	577.1	578.2	582.3	587.1
57.5	532.3	527.8	534.1	528.7	531.9	531.5	531.1	534.3	539.3	538.4
60.0	485.9	481.9	485.9	482.6	486.9	483.9	485.8	491.1	490.0	490.2
62.5	438.7	435.9	437.4	436.8	437.4	437.1	441.1	441.5	441.3	442.7
65.0	390.8	389.3	389.4	391.2	389.1	391.2	393.1	392.4	393.5	395.5
67.5	343.4	343.2	341.7	343.0	341.8	345.5	343.8	344.4	346.4	349.2
70.0	295.6	297.3	295.0	293.8	295.2	295.9	295.9	297.5	299.9	302.0
72.5	249.5	250.2	249.6	246.9	247.8	248.4	249.5	251.5	253.2	255.1
75.0	203.8	203.5	203.3	202.4	201.3	202.6	204.4	206.1	207.7	209.1
77.5	159.8	159.0	157.9	157.2	156.7	159.2	160.7	162.0	163.1	163.9
80.0	116.8	117.0	116.2	114.6	115.4	117.5	118.5	119.0	119.2	123.2
82.5	77.58	77.37	75.40	75.60	76.82	77.69	78.28	83.92	88.62	92.71
85.0	41.84	40.77	39.69	40.41	41.75	47.89	52.71	56.62	59.86	62.64
87.5	12.53	11.16	11.48	17.78	22.15	25.37	27.89	29.85	31.47	32.86
90.0	2.992	3.590	3.595	3.534	3.501	3.450	3.445	3.357	3.282	3.212
92.5	3.136	3.522	3.524	3.722	4.499	5.840	7.230	8.486	9.728	10.89
95.0	4.106	5.000	5.471	6.204	5.719	8.470	11.18	13.75	16.28	18.65
97.5	10.12	11.33	11.77	12.69	13.45	14.36	15.46	19.29	23.06	26.58
100.0	18.52	19.64	20.73	21.36	22.77	24.85	26.72	29.09	30.96	34.76
102.5	28.67	29.65	30.71	32.40	33.93	36.19	39.17	43.51	47.40	47.68
105.0	40.60	41.62	42.78	44.91	47.32	50.23	52.75	58.97	64.00	62.17
107.5	54.62	56.09	57.14	60.06	63.74	68.49	69.62	75.69	80.04	76.19
110.0	73.56	75.24	76.54	79.92	83.63	90.15	87.40	91.89	95.65	89.60
112.5	98.64	99.28	100.7	105.9	103.0	109.5	103.9	106.1	105.7	101.7
115.0	121.2	120.8	120.3	121.5	120.1	120.9	118.7	117.6	114.6	110.1
117.5	132.9	132.0	132.4	132.2	132.0	131.0	130.3	127.1	123.3	118.6
120.0	144.1	143.1	143.7	142.7	143.0	140.7	138.7	136.1	132.0	127.3
122.5	155.9	154.0	154.5	152.5	152.0	149.7	147.0	144.0	140.6	136.1
125.0	165.4	163.4	163.4	161.5	159.9	158.5	155.1	152.0	148.8	145.1
127.5	174.0	171.8	171.4	169.9	167.7	166.5	163.5	160.2	157.0	153.5
130.0	181.9	179.7	178.9	177.9	175.6	173.9	172.1	168.9	165.4	161.8
132.5	189.4	187.1	186.3	186.2	183.5	181.5	180.2	177.6	174.0	170.3
135.0	197.1	194.9	193.9	194.2	191.6	189.4	187.7	186.3	182.6	179.0
137.5	204.4	202.2	201.3	201.3	199.8	197.2	195.2	193.5	191.5	188.1
140.0	211.4	209.4	208.4	208.2	207.9	204.9	202.6	200.7	199.2	197.4
142.5	218.5	216.5	215.4	214.9	215.1	212.7	210.2	208.4	206.9	205.6
145.0	225.1	223.1	221.9	221.5	221.6	220.4	218.2	216.3	214.8	213.2
147.5	231.9	229.9	228.5	228.0	228.2	228.9	226.4	224.5	222.6	221.0
150.0	238.9	236.9	235.6	235.0	235.0	235.5	234.8	232.4	230.5	228.6
152.5	246.0	244.1	242.8	242.0	241.7	241.8	242.3	240.6	238.2	236.5
155.0	252.7	250.8	249.4	248.4	248.0	247.9	247.9	248.2	246.2	244.2
157.5	258.7	256.9	255.5	254.5	253.8	253.4	253.4	253.5	253.8	251.6
160.0	264.3	262.5	261.1	260.1	259.3	258.7	258.4	258.1	257.8	257.7
162.5	268.9	267.4	266.1	265.0	264.0	263.2	262.5	262.1	261.8	261.6
165.0	272.5	271.1	269.9	268.8	267.9	267.2	266.6	266.1	265.5	265.0
167.5	275.9	274.6	273.5	272.5	271.6	270.7	269.9	269.4	269.1	268.9
170.0	278.2	277.2	276.3	275.6	274.9	274.4	273.8	273.2	272.8	272.6
172.5	280.8	280.1	279.3	278.7	278.1	277.6	277.2	276.9	276.7	276.7
175.0	283.7	283.1	282.6	282.2	281.7	281.4	281.0	280.8	280.6	280.6
177.5	286.4	286.1	285.9	285.7	285.6	285.4	285.4	285.3	285.3	285.3
180.0	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0
0.0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
2.5	1161	1161	1160	1160	1160	1160	1160	1160	1160	1160
5.0	1152	1152	1152	1152	1151	1151	1151	1151	1152	1152
7.5	1143	1142	1142	1142	1142	1143	1143	1143	1143	1143
10.0	1132	1132	1133	1133	1133	1134	1134	1134	1135	1135
12.5	1120	1121	1122	1123	1124	1125	1125	1126	1126	1127
15.0	1107	1109	1111	1112	1114	1115	1116	1117	1118	1118
17.5	1093	1096	1097	1096	1095	1095	1094	1094	1095	1095
20.0	1075	1073	1072	1072	1071	1071	1071	1071	1072	1072
22.5	1048	1047	1047	1047	1047	1047	1048	1048	1049	1049
25.0	1021	1021	1021	1021	1022	1023	1024	1025	1025	1026
27.5	992.6	993.3	994.5	996.0	997.8	999.3	1001	1001	1002	1003
30.0	963.7	965.6	968.0	970.5	973.0	975.2	977.1	978.2	979.2	979.6
32.5	934.5	937.7	941.1	944.6	943.9	943.7	943.6	943.6	944.2	945.1
35.0	904.9	909.4	908.7	908.0	907.9	908.1	908.3	908.6	909.2	910.1
37.5	873.2	871.7	871.2	871.4	871.9	872.6	873.1	873.6	874.2	875.1
40.0	833.4	833.0	833.5	834.5	835.8	837.0	838.0	838.6	839.2	840.0
42.5	793.5	794.3	795.8	797.8	799.7	801.5	802.8	803.6	804.2	805.0
45.0	753.4	755.6	758.2	761.0	763.6	766.0	767.7	768.7	769.3	770.0
47.5	713.5	716.9	720.7	724.3	725.1	725.3	725.3	725.4	725.7	726.8
50.0	673.6	678.2	680.0	679.9	680.3	680.9	681.4	681.8	682.1	683.3
52.5	634.0	633.4	633.7	634.5	635.5	636.7	637.4	638.1	638.5	639.8
55.0	586.3	586.5	587.7	589.1	590.8	592.4	593.5	594.5	594.9	596.2
57.5	538.6	539.9	541.8	543.8	546.1	548.2	549.7	550.8	551.4	552.7
60.0	491.6	493.5	496.1	498.7	501.6	504.0	505.8	507.1	507.8	509.2
62.5	444.9	447.5	450.6	453.6	455.4	457.0	458.2	459.1	459.6	461.2
65.0	398.6	401.5	403.3	405.1	407.0	408.6	409.9	410.8	411.5	413.0
67.5	351.5	353.3	355.1	356.9	358.7	360.3	361.6	362.6	363.3	364.9
70.0	303.8	305.5	307.3	308.9	310.5	312.0	313.4	314.4	315.1	316.7
72.5	256.7	258.3	259.7	261.1	262.5	263.9	265.2	266.2	267.0	268.6
75.0	210.3	211.4	212.4	213.5	214.5	215.8	217.0	218.1	218.8	220.4
77.5	164.5	165.0	168.5	172.1	175.2	178.0	180.2	181.9	182.6	183.8
80.0	127.7	131.6	135.0	138.0	140.5	142.8	144.6	145.9	146.5	147.5
82.5	96.22	99.24	101.8	104.1	105.9	107.6	109.0	110.0	110.3	111.2
85.0	65.01	67.06	68.78	70.24	71.42	72.54	73.45	74.07	74.14	74.88
87.5	34.02	35.02	35.82	36.48	36.95	37.46	37.88	38.15	37.98	38.55
90.0	3.142	3.048	2.918	2.745	2.493	2.386	2.325	2.236	1.821	2.225
92.5	11.78	12.41	12.66	11.38	9.999	8.878	7.991	7.232	6.399	7.170
95.0	20.48	21.80	22.37	19.97	17.48	15.36	13.65	12.22	10.98	12.11
97.5	29.30	31.27	32.02	28.51	24.91	21.80	19.29	17.21	15.56	17.04
100.0	38.27	40.84	41.56	36.94	32.27	28.21	24.91	22.19	20.13	21.96
102.5	48.62	50.57	50.97	45.26	39.53	34.55	30.49	27.15	24.71	26.86
105.0	60.87	60.89	59.72	53.65	47.18	41.28	36.33	32.19	29.29	31.84
107.5	72.75	70.96	68.24	62.17	55.70	49.87	45.20	41.37	38.91	41.39
110.0	84.19	80.73	76.72	70.64	64.16	58.45	54.07	50.55	48.53	50.94
112.5	95.09	90.17	85.15	79.06	72.57	67.01	62.94	59.73	58.15	60.48
115.0	104.8	99.23	93.54	87.42	80.93	75.58	71.82	68.92	67.77	70.02
117.5	113.6	108.2	102.2	95.74	89.27	84.14	80.71	78.12	77.39	79.57
120.0	122.4	117.1	111.5	105.3	98.68	93.36	89.87	87.40	87.00	89.23
122.5	131.4	126.2	120.8	114.9	108.8	103.8	100.6	98.56	98.83	101.6
125.0	140.5	135.4	130.2	124.6	119.0	114.4	111.4	109.8	110.7	114.0
127.5	149.5	144.6	139.7	134.4	129.3	124.9	122.2	121.0	122.5	126.4
130.0	157.9	153.9	149.2	144.3	139.6	135.6	133.1	132.3	134.3	138.7
132.5	166.6	162.8	158.6	154.3	149.9	146.2	144.0	143.6	146.1	150.9
135.0	175.6	172.0	168.0	164.1	160.1	156.9	155.0	154.9	158.0	163.1
137.5	184.8	181.3	177.7	174.0	170.3	167.5	165.8	165.9	169.1	174.1
140.0	194.2	190.9	187.5	184.1	180.7	178.1	176.6	176.9	180.1	185.1
142.5	203.9	200.6	197.4	194.3	191.2	188.7	187.4	188.0	191.2	196.1
145.0	211.8	210.4	207.6	204.4	201.7	199.3	198.3	199.1	202.3	207.0
147.5	219.4	217.9	216.5	214.8	212.1	210.0	209.3	210.2	213.4	217.9
150.0	227.0	225.5	223.7	222.3	220.7	219.7	219.8	221.2	224.4	228.6
152.5	234.7	232.9	231.1	229.6	228.2	227.5	227.7	229.3	232.2	235.9
155.0	242.2	240.2	238.6	236.9	235.8	235.4	235.6	237.4	239.9	243.2
157.5	249.4	247.6	245.8	244.4	243.5	243.3	243.7	245.5	247.7	250.6
160.0	256.7	254.8	253.2	252.1	251.4	251.3	251.8	253.6	255.4	257.9
162.5	261.2	261.1	260.8	259.8	259.4	259.3	260.0	261.6	263.2	265.3
165.0	264.9	264.9	265.0	265.3	265.9	266.5	268.0	269.5	270.9	272.6
167.5	268.7	268.6	268.8	269.2	269.5	270.3	271.7	272.9	274.0	275.3
170.0	272.5	272.6	272.8	272.9	273.4	274.3	275.3	276.2	277.0	278.1
172.5	276.6	276.5	276.6	277.0	277.6	278.3	278.9	279.5	280.1	280.9
175.0	280.6	280.7	281.0	281.4	281.7	282.1	282.4	282.7	283.1	283.6
177.5	285.3	285.3	285.4	285.5	285.6	285.7	285.8	286.0	286.2	286.4
180.0	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2

C角度范围： 0度 - 360度

C角度间隔： 5.0度

测试速度：快速

环境温度：25.3℃

测试人员：

测试日期：2024-01-10

γ角度范围： 0度 - 180度

γ角度间隔： 0.5度

测试系统：远方(EVERFINE)G0-2000B_V1系统 V2.0.291

环境湿度：65.0%

测试距离：8.190米 [K=1.0000]

备注：

Photometric Data Table [cd]

G/C	100.0	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	145.0
0.0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
2.5	1160	1160	1161	1161	1161	1162	1162	1162	1163	1163
5.0	1152	1152	1152	1153	1153	1154	1154	1155	1156	1156
7.5	1144	1144	1144	1144	1145	1145	1145	1146	1147	1147
10.0	1135	1135	1135	1135	1135	1135	1135	1136	1136	1137
12.5	1127	1126	1126	1126	1125	1125	1124	1124	1124	1124
15.0	1118	1118	1117	1116	1115	1114	1112	1111	1110	1110
17.5	1096	1097	1098	1100	1102	1101	1099	1097	1095	1094
20.0	1073	1074	1075	1076	1078	1080	1082	1082	1079	1076
22.5	1050	1050	1051	1052	1053	1054	1056	1058	1061	1057
25.0	1026	1027	1027	1027	1027	1028	1029	1031	1033	1037
27.5	1003	1003	1003	1002	1002	1001	1001	1002	1004	1007
30.0	979.6	979.3	978.5	977.3	975.8	974.5	973.5	973.0	973.7	975.4
32.5	946.2	947.3	948.1	952.1	949.7	947.2	945.1	943.4	942.6	942.7
35.0	911.1	909.4	906.3	912.1	915.8	919.8	916.3	913.3	910.2	899.4
37.5	875.9	870.0	864.2	874.7	871.8	870.2	881.4	882.4	863.7	839.9
40.0	840.6	828.9	823.1	835.1	822.1	811.2	819.2	832.5	798.8	770.1
42.5	805.2	786.5	784.9	791.5	765.8	746.6	753.5	750.1	719.9	686.9
45.0	769.4	742.8	750.2	743.9	702.4	679.0	683.2	667.9	636.8	598.9
47.5	725.2	697.1	713.8	691.8	633.2	609.4	612.6	595.7	563.3	534.9
50.0	679.8	652.5	667.0	633.4	568.3	541.0	544.8	530.6	504.1	485.6
52.5	634.9	607.4	615.8	576.9	520.1	494.7	484.4	474.9	454.7	443.7
55.0	589.8	561.9	563.9	523.2	476.8	456.6	442.7	428.2	411.7	402.5
57.5	545.0	515.5	511.9	472.1	436.5	416.9	400.4	384.7	371.1	360.9
60.0	500.7	467.9	461.2	425.0	398.0	376.6	359.2	343.0	330.1	320.5
62.5	453.8	423.9	413.5	381.2	360.1	337.2	318.3	303.2	291.4	283.1
65.0	406.6	381.8	368.3	338.1	318.7	298.0	278.8	265.1	254.9	248.2
67.5	359.6	340.1	322.9	295.4	276.7	259.0	241.8	228.7	220.9	215.4
70.0	313.1	298.6	277.8	253.1	235.9	221.4	207.6	196.2	189.4	185.1
72.5	267.1	257.1	233.1	211.0	196.3	185.1	174.8	165.3	159.9	159.0
75.0	221.6	215.4	188.8	169.3	157.6	149.8	143.2	135.3	131.5	134.4
77.5	184.3	178.2	153.1	134.4	122.6	115.7	112.5	106.1	104.3	109.7
80.0	147.8	142.5	122.2	107.3	97.95	92.07	87.55	79.88	78.32	84.88
82.5	111.4	107.1	91.69	80.56	73.64	69.26	65.76	59.76	58.96	62.39
85.0	74.92	72.00	61.56	54.16	49.58	46.67	44.29	40.19	40.08	42.32
87.5	38.46	37.00	31.67	27.98	25.70	24.24	23.04	20.98	21.10	22.20
90.0	1.998	2.082	1.895	1.891	1.895	1.895	1.895	1.957	2.082	2.049
92.5	7.764	8.788	9.476	10.25	11.01	10.24	9.250	8.258	6.883	5.785
95.0	13.52	15.48	17.04	18.57	20.13	18.63	16.67	14.65	11.83	9.636
97.5	19.26	22.15	24.59	26.83	29.25	27.13	24.20	21.22	17.08	13.71
100.0	24.98	28.78	32.08	35.00	38.39	35.79	31.92	28.05	23.67	22.97
102.5	30.66	35.36	39.52	43.05	47.54	44.83	41.81	40.61	39.97	37.38
105.0	36.66	42.63	48.13	52.69	58.12	57.24	55.12	55.27	56.42	52.49
107.5	46.41	52.93	59.02	63.76	68.93	69.65	68.25	69.69	72.41	68.70
110.0	56.11	63.13	69.81	74.73	79.65	81.98	81.24	83.83	87.84	84.25
112.5	65.75	73.18	80.51	85.60	90.41	94.18	94.16	97.47	99.51	98.42
115.0	75.32	83.12	91.13	96.50	101.2	106.0	107.6	110.3	111.3	111.4
117.5	84.84	92.94	101.6	107.3	113.3	118.6	121.9	123.8	124.0	123.5
120.0	94.72	103.3	112.9	120.2	127.0	131.5	136.1	137.9	138.0	136.3
122.5	107.0	115.1	124.6	133.0	140.5	144.8	149.8	152.7	153.1	149.7
125.0	119.2	126.8	136.2	145.4	153.5	158.5	162.5	167.9	165.9	164.1
127.5	131.4	138.6	147.6	157.4	166.3	172.4	175.2	179.7	177.7	177.5
130.0	143.7	150.4	158.9	169.1	178.8	185.4	188.0	191.6	190.2	189.2
132.5	156.0	162.3	170.0	180.2	189.7	196.4	200.6	203.6	204.3	201.1
135.0	168.1	174.1	181.3	190.7	199.7	207.0	212.4	216.4	219.2	215.7
137.5	179.6	185.7	192.7	201.3	209.7	217.1	223.4	228.7	233.1	231.8
140.0	190.9	197.2	204.1	212.1	220.0	227.2	233.8	240.0	243.4	244.7
142.5	202.1	208.4	215.5	223.0	230.4	237.3	243.8	248.5	251.7	254.4
145.0	213.1	219.6	226.9	234.0	241.1	247.3	251.6	255.6	259.4	262.9
147.5	224.0	230.5	237.9	244.9	250.0	254.6	258.7	262.8	266.7	270.6
150.0	234.1	240.0	245.9	251.4	256.6	261.5	265.8	269.9	273.9	277.9
152.5	240.9	246.8	252.2	257.8	262.9	268.0	272.7	276.9	281.0	285.1
155.0	247.8	253.2	258.5	263.9	268.9	274.0	278.9	283.5	287.8	291.9
157.5	254.6	259.4	264.9	269.7	274.8	279.4	284.4	289.3	293.8	295.1
160.0	261.5	265.4	270.9	275.5	280.1	284.8	289.3	292.9	295.1	297.0
162.5	268.4	271.7	276.2	281.3	285.3	288.6	291.0	293.2	295.3	297.4
165.0	274.8	277.2	279.7	283.4	286.5	288.7	291.0	293.2	295.3	297.1
167.5	277.1	279.1	281.1	283.3	286.2	288.9	290.8	292.7	294.5	296.4
170.0	279.5	281.0	282.6	284.3	285.9	288.0	290.1	292.1	293.6	295.1
172.5	281.8	283.0	284.2	285.4	286.6	287.8	289.1	290.5	291.9	293.3
175.0	284.2	284.9	285.7	286.5	287.4	288.2	289.0	289.8	290.7	291.5
177.5	286.7	287.0	287.3	287.7	288.1	288.5	289.0	289.4	289.8	290.2
180.0	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2	289.2

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	150.0	155.0	160.0	165.0	170.0	175.0	180.0	185.0	190.0	195.0
0.0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
2.5	1164	1164	1165	1166	1166	1167	1168	1167	1166	1166
5.0	1157	1158	1159	1160	1162	1163	1164	1163	1162	1160
7.5	1148	1150	1151	1152	1154	1156	1158	1156	1154	1153
10.0	1138	1139	1140	1142	1144	1146	1149	1146	1144	1142
12.5	1125	1126	1127	1129	1131	1134	1137	1134	1131	1129
15.0	1110	1110	1111	1113	1115	1119	1122	1119	1116	1113
17.5	1093	1093	1093	1095	1097	1101	1105	1101	1097	1095
20.0	1074	1073	1073	1074	1076	1080	1085	1080	1077	1074
22.5	1054	1052	1051	1052	1054	1057	1063	1057	1054	1052
25.0	1032	1029	1027	1027	1029	1032	1038	1032	1029	1027
27.5	1009	1004	1001	1000	1001	1005	1011	1005	1001	1000
30.0	978.9	978.1	973.8	971.8	972.3	975.8	982.2	975.6	972.1	971.5
32.5	942.1	950.0	944.6	941.5	941.5	944.6	951.3	944.4	941.1	941.1
35.0	894.1	905.6	914.0	909.6	908.7	911.6	918.5	911.3	908.1	908.8
37.5	835.4	850.5	882.1	876.6	874.5	876.8	883.9	876.4	873.6	875.3
40.0	764.0	786.9	831.7	841.8	838.7	840.6	847.7	840.1	837.8	840.4
42.5	687.5	720.2	772.3	805.9	801.5	802.6	810.0	802.1	800.3	804.2
45.0	612.0	655.0	712.0	767.1	758.0	759.1	770.7	762.7	761.5	760.6
47.5	542.0	591.8	645.7	698.4	698.8	707.0	729.7	721.8	721.4	725.2
50.0	485.4	524.0	569.0	612.4	632.4	651.5	687.8	679.7	680.1	681.2
52.5	442.5	452.8	492.7	532.0	554.6	587.9	644.5	636.5	637.9	636.7
55.0	397.9	394.7	427.9	451.7	466.6	521.3	600.2	592.1	594.8	591.3
57.5	354.8	355.1	371.4	381.2	389.1	461.9	554.8	546.9	550.3	545.7
60.0	314.3	317.9	322.5	328.4	336.1	405.0	508.6	500.9	502.4	500.2
62.5	276.8	277.3	281.0	284.0	288.8	349.8	461.7	454.3	454.6	454.8
65.0	241.9	238.9	244.2	246.0	246.2	294.2	414.4	407.6	406.6	410.1
67.5	212.3	206.4	214.4	213.2	208.4	239.7	367.0	360.8	359.2	361.4
70.0	186.9	185.3	190.5	185.6	176.3	186.3	319.2	313.2	311.9	310.7
72.5	165.0	165.0	168.9	163.3	149.4	135.7	267.2	262.9	262.0	260.4
75.0	142.2	144.4	145.8	144.6	129.0	111.5	216.6	212.0	211.7	211.7
77.5	116.1	120.6	123.2	122.4	113.0	97.06	150.1	167.0	165.6	165.1
80.0	90.45	94.44	98.63	99.08	98.17	81.85	73.23	125.3	123.4	121.8
82.5	65.35	68.60	71.29	73.81	72.99	64.45	50.01	84.91	82.48	81.84
85.0	44.17	45.15	44.82	45.95	47.74	45.50	23.29	47.24	46.02	44.65
87.5	23.07	23.45	23.12	22.59	20.90	20.50	8.782	15.15	14.45	18.90
90.0	2.012	1.891	1.835	2.251	2.259	2.031	1.958	0.9102	0.9057	0.9057
92.5	4.812	3.701	2.614	2.429	2.084	2.085	0.5669	0.7163	0.7995	1.082
95.0	7.733	5.687	3.555	4.658	3.976	3.732	1.139	2.098	3.122	3.306
97.5	10.89	11.04	10.55	10.42	10.06	10.22	5.687	7.210	8.149	8.902
100.0	22.79	21.56	19.12	19.05	19.13	17.29	10.79	11.81	14.07	15.21
102.5	36.13	33.25	31.31	31.08	29.71	26.02	28.88	17.13	20.13	23.08
105.0	50.68	48.45	48.03	45.65	44.06	37.74	44.13	24.25	27.66	32.29
107.5	66.76	66.66	67.03	62.66	61.02	51.33	63.71	37.09	39.05	42.98
110.0	82.49	85.95	85.76	81.89	76.40	68.79	83.85	55.01	52.65	55.12
112.5	97.16	103.5	100.8	103.6	94.20	88.30	107.7	76.41	67.41	68.07
115.0	111.2	114.1	114.1	116.1	109.0	104.8	124.3	94.02	80.47	78.09
117.5	123.1	124.1	125.7	123.6	118.8	114.3	134.7	107.7	92.35	88.71
120.0	134.0	134.2	136.9	133.2	129.3	123.8	146.4	122.4	106.1	101.5
122.5	146.6	144.8	146.0	143.6	140.9	134.8	159.2	137.9	121.8	116.5
125.0	161.5	157.8	155.9	155.0	153.0	147.2	172.6	154.5	143.5	137.7
127.5	177.4	173.9	169.8	168.2	166.2	162.5	186.9	174.4	167.8	159.8
130.0	192.2	190.5	187.1	185.5	181.5	178.8	201.7	192.3	187.1	181.4
132.5	203.2	205.2	204.7	204.6	198.1	193.8	216.3	209.0	205.5	204.9
135.0	215.2	217.5	219.9	221.3	215.2	210.5	229.4	224.9	224.2	226.3
137.5	229.6	231.3	233.9	234.5	232.4	231.2	241.7	238.7	237.5	238.4
140.0	244.9	246.2	249.9	247.9	245.6	245.8	251.8	249.4	248.7	250.1
142.5	257.0	259.7	263.3	260.3	258.2	257.8	260.3	259.0	259.1	261.0
145.0	266.2	270.1	271.8	270.0	268.6	268.3	268.4	267.7	268.1	269.5
147.5	274.4	278.5	278.7	279.1	279.9	280.5	276.2	275.6	275.8	276.8
150.0	282.1	284.1	284.6	285.4	286.6	288.5	286.9	285.2	284.1	283.1
152.5	288.5	289.0	289.8	290.8	292.2	294.0	291.3	289.1	286.9	285.0
155.0	292.7	293.5	294.5	295.6	297.1	298.9	292.6	290.8	289.3	288.1
157.5	296.2	297.3	298.5	299.9	301.4	303.2	295.9	294.3	293.0	291.9
160.0	298.6	300.1	301.5	303.0	304.6	306.3	301.3	299.8	298.8	298.2
162.5	299.4	301.3	302.9	304.5	306.1	307.8	306.6	304.8	303.0	301.0
165.0	298.9	300.7	302.4	304.1	305.7	307.2	302.1	300.7	299.3	297.9
167.5	298.1	299.7	301.2	302.5	303.9	305.1	299.8	299.1	298.3	297.5
170.0	296.5	297.8	299.1	300.4	301.5	302.6	295.6	295.0	294.3	293.5
172.5	294.5	295.7	296.8	297.7	298.6	299.4	295.2	294.4	293.5	292.5
175.0	292.2	293.0	293.7	294.4	295.0	295.6	284.5	284.3	283.9	283.5
177.5	290.6	291.0	291.4	291.7	292.0	292.3	283.8	283.7	283.6	283.6
180.0	289.2	289.2	289.2	289.2	289.2	289.2	286.8	286.8	286.8	286.8

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	200.0	205.0	210.0	215.0	220.0	225.0	230.0	235.0	240.0	245.0
0.0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
2.5	1165	1165	1164	1164	1163	1163	1162	1162	1161	1161
5.0	1159	1158	1157	1157	1156	1155	1155	1154	1154	1153
7.5	1151	1150	1149	1148	1147	1147	1146	1146	1145	1145
10.0	1140	1139	1138	1137	1137	1137	1136	1136	1136	1136
12.5	1127	1126	1125	1125	1125	1125	1126	1126	1127	1127
15.0	1112	1111	1110	1111	1111	1112	1114	1115	1116	1117
17.5	1094	1093	1094	1095	1096	1098	1101	1103	1104	1102
20.0	1073	1074	1075	1077	1080	1083	1083	1081	1079	1077
22.5	1051	1052	1055	1058	1062	1059	1057	1055	1054	1053
25.0	1027	1029	1033	1037	1034	1031	1029	1028	1028	1028
27.5	1001	1004	1009	1007	1004	1002	1001	1002	1002	1003
30.0	973.4	977.8	978.6	974.9	973.1	972.5	973.0	974.2	975.8	977.5
32.5	944.1	949.5	944.7	942.3	941.6	942.3	944.1	946.3	949.2	952.0
35.0	913.0	913.8	910.0	908.8	909.5	911.6	914.8	918.6	916.7	915.0
37.5	880.9	876.5	874.4	874.7	876.9	880.7	883.2	880.5	878.7	877.8
40.0	843.2	838.8	838.0	840.0	843.9	846.2	843.2	841.5	840.8	840.7
42.5	803.3	800.2	801.0	804.7	808.4	804.9	803.1	802.5	802.7	803.4
45.0	762.2	761.0	763.6	769.2	765.6	763.5	762.9	763.4	764.7	766.2
47.5	720.5	721.0	725.8	725.4	722.6	722.0	722.7	724.5	726.7	729.1
50.0	678.2	680.8	684.8	680.8	679.7	680.4	682.7	685.5	685.8	684.5
52.5	635.4	640.4	638.4	636.3	636.8	639.2	642.8	640.7	639.6	638.9
55.0	592.5	596.1	592.2	591.8	594.2	597.3	595.3	594.0	593.5	593.5
57.5	549.5	548.0	546.2	547.8	551.3	549.0	547.8	547.6	547.8	548.2
60.0	504.8	500.4	500.5	504.2	502.2	501.2	501.0	501.4	502.2	503.1
62.5	455.3	453.1	455.7	455.0	453.8	453.8	454.5	455.6	456.9	458.0
65.0	406.3	406.8	407.6	406.2	406.1	407.0	408.4	409.6	409.2	408.8
67.5	358.5	360.5	357.7	358.4	359.3	360.8	360.7	360.7	360.3	359.9
70.0	311.5	309.5	308.9	311.6	312.6	311.5	311.7	312.1	311.7	311.2
72.5	261.7	259.3	261.0	263.4	263.2	262.4	263.1	263.8	263.3	262.6
75.0	211.4	210.9	213.1	213.9	214.1	213.9	214.8	216.0	215.3	214.3
77.5	164.3	164.6	166.0	166.1	165.5	165.8	166.8	168.4	170.5	172.3
80.0	121.0	121.3	121.0	119.7	117.5	123.0	128.6	133.9	136.3	137.9
82.5	80.76	79.60	78.45	82.71	86.35	91.97	96.17	100.3	102.3	103.5
85.0	43.90	48.33	52.02	55.10	57.49	61.39	64.18	67.03	68.40	69.24
87.5	22.01	24.38	26.28	27.92	29.11	31.09	32.45	33.89	34.58	34.99
90.0	0.9057	0.9057	0.9104	0.9756	0.9757	0.9248	0.8544	0.8311	0.8078	0.7751
92.5	1.963	3.086	3.832	4.549	5.129	6.199	7.409	8.381	8.808	8.667
95.0	3.260	5.407	6.838	8.206	9.340	11.57	14.02	15.97	16.82	16.56
97.5	9.302	10.05	10.00	12.02	13.66	17.12	20.76	23.65	24.84	24.44
100.0	16.41	17.92	18.82	18.96	18.78	22.95	27.67	31.46	32.88	32.32
102.5	24.86	26.62	28.46	28.97	30.29	32.44	35.74	39.50	40.94	40.19
105.0	35.38	36.18	38.41	39.30	41.70	43.25	45.63	48.81	50.00	48.82
107.5	45.92	46.59	48.41	50.80	52.94	54.07	55.58	58.25	59.38	58.02
110.0	55.60	57.36	58.54	62.42	64.29	64.95	65.37	68.06	68.91	67.18
112.5	66.28	67.30	68.64	72.52	74.46	75.72	74.96	78.20	78.26	76.36
115.0	76.38	77.01	78.84	81.36	83.84	85.47	85.40	87.68	87.49	86.01
117.5	86.51	87.77	89.81	91.70	94.58	96.07	96.92	98.37	97.70	95.89
120.0	97.02	98.03	100.3	103.0	105.8	107.4	108.1	109.7	108.9	106.9
122.5	111.6	110.9	112.8	115.3	117.6	119.4	118.8	120.6	119.3	118.2
125.0	130.3	124.4	127.4	129.7	129.7	130.9	129.7	132.6	129.8	131.4
127.5	149.9	141.9	142.4	141.8	141.5	144.5	142.0	145.7	141.7	145.3
130.0	171.3	163.8	157.4	152.4	154.1	159.2	158.8	159.1	154.7	159.5
132.5	194.8	184.1	170.4	165.4	173.0	174.7	176.8	172.5	169.0	172.3
135.0	213.9	199.9	187.7	182.6	193.6	192.4	196.6	188.2	183.8	186.3
137.5	230.7	217.5	207.8	210.9	210.2	213.3	212.5	204.7	199.9	199.5
140.0	248.8	236.5	232.1	228.5	228.2	235.4	227.6	218.6	213.7	211.7
142.5	263.9	255.3	248.0	243.2	245.5	246.1	242.2	231.5	225.8	223.1
145.0	271.5	268.0	260.7	257.5	255.8	253.8	248.6	243.3	238.3	233.3
147.5	277.8	277.5	270.6	266.2	263.4	259.3	254.5	250.5	248.6	242.0
150.0	281.6	279.6	276.7	273.4	269.4	265.1	262.0	258.0	255.0	248.7
152.5	283.5	282.8	282.7	279.2	275.5	273.2	268.8	265.1	260.6	256.3
155.0	287.3	286.5	285.9	286.4	284.3	279.7	274.9	271.3	267.1	262.9
157.5	291.0	291.1	291.8	292.0	289.6	284.4	281.0	277.9	273.8	267.3
160.0	297.8	297.2	294.9	292.1	289.8	289.2	288.1	284.0	277.9	270.1
162.5	298.5	296.0	293.8	292.5	292.1	291.5	289.9	285.9	279.6	274.4
165.0	296.5	295.6	294.9	294.0	292.6	290.2	286.7	282.6	279.5	278.1
167.5	296.4	295.2	293.7	291.5	289.2	286.8	284.3	282.4	280.7	279.2
170.0	292.6	291.4	290.4	289.2	287.7	286.1	284.1	282.2	280.2	278.9
172.5	291.5	290.0	288.3	286.7	284.9	282.9	281.3	280.2	279.4	279.0
175.0	283.0	282.4	281.8	281.1	280.7	280.6	280.4	280.5	281.0	281.5
177.5	283.7	283.8	283.9	284.1	284.2	284.2	284.2	284.3	284.4	284.4
180.0	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	250.0	255.0	260.0	265.0	270.0	275.0	280.0	285.0	290.0	295.0
0.0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
2.5	1161	1161	1161	1160	1160	1160	1160	1160	1160	1161
5.0	1153	1153	1153	1152	1152	1152	1152	1152	1152	1152
7.5	1145	1145	1145	1144	1144	1144	1144	1144	1144	1144
10.0	1137	1137	1137	1136	1136	1136	1136	1135	1135	1134
12.5	1128	1128	1128	1128	1128	1128	1127	1127	1126	1125
15.0	1119	1119	1120	1120	1120	1120	1119	1118	1116	1115
17.5	1100	1099	1098	1097	1097	1097	1097	1097	1098	1099
20.0	1076	1075	1075	1074	1074	1073	1073	1073	1073	1074
22.5	1052	1052	1051	1051	1050	1050	1050	1049	1049	1049
25.0	1028	1028	1028	1027	1027	1026	1026	1025	1024	1023
27.5	1004	1004	1004	1004	1004	1003	1002	1001	999.5	997.9
30.0	979.0	980.1	980.6	980.8	980.4	979.5	978.5	976.7	974.6	972.2
32.5	950.0	948.5	946.0	946.0	945.2	944.7	944.7	944.9	945.3	946.3
35.0	913.6	912.6	911.5	910.7	910.0	909.4	909.2	909.0	908.9	909.3
37.5	877.2	876.8	876.1	875.4	874.8	874.1	873.7	873.2	872.6	872.3
40.0	840.8	840.8	840.6	840.1	839.5	838.8	838.2	837.2	836.2	835.1
42.5	804.3	804.9	805.1	804.8	804.3	803.5	802.7	801.4	799.8	798.0
45.0	767.8	769.0	769.6	769.5	769.1	768.2	767.3	765.6	763.5	761.0
47.5	728.8	727.8	726.8	725.7	724.9	724.4	724.4	724.4	724.6	724.0
50.0	683.7	683.1	682.5	681.5	680.7	680.2	680.0	679.7	679.4	679.4
52.5	638.7	638.5	638.3	637.3	636.5	636.0	635.7	635.0	634.3	633.7
55.0	593.8	593.9	593.9	593.2	592.3	591.8	591.3	590.4	589.2	588.1
57.5	548.9	549.3	549.6	549.0	548.1	547.6	547.0	545.8	544.3	542.6
60.0	504.1	504.8	505.3	504.8	503.9	503.4	502.7	501.3	499.5	497.3
62.5	457.7	457.3	456.9	456.1	455.1	454.7	454.5	453.8	453.0	452.0
65.0	408.6	408.2	407.9	407.2	406.2	405.9	405.7	405.0	404.1	403.2
67.5	359.6	359.3	358.9	358.3	357.4	357.1	356.8	356.1	355.3	354.6
70.0	310.8	310.4	309.9	309.4	308.5	308.3	308.0	307.4	306.7	306.1
72.5	262.0	261.5	261.0	260.5	259.7	259.5	259.2	258.7	258.3	257.9
75.0	213.4	212.7	212.1	211.6	210.8	210.8	210.5	210.1	209.9	209.9
77.5	173.9	175.1	175.8	176.2	175.8	175.5	174.5	172.9	170.9	168.5
80.0	139.1	140.2	140.8	141.1	140.8	140.5	139.7	138.4	136.8	134.8
82.5	104.5	105.3	105.7	106.0	105.7	105.6	105.0	104.0	102.8	101.3
85.0	69.88	70.41	70.72	70.88	70.71	70.59	70.23	69.61	68.85	67.87
87.5	35.30	35.56	35.71	35.78	35.68	35.64	35.51	35.25	34.95	34.49
90.0	0.7425	0.7237	0.6957	0.6722	0.6582	0.6816	0.8026	0.9057	1.055	1.144
92.5	8.302	8.036	6.921	6.394	5.982	6.222	6.934	7.816	8.948	10.14
95.0	15.86	15.33	13.13	12.11	11.31	11.76	13.06	14.71	16.82	19.10
97.5	23.40	22.58	19.31	17.83	16.63	17.29	19.16	21.58	24.64	28.00
100.0	30.93	29.78	25.44	23.53	21.96	22.82	25.25	28.40	32.38	36.81
102.5	38.44	36.91	31.50	29.22	27.28	28.34	31.30	35.16	40.04	45.50
105.0	46.69	44.26	37.84	34.97	32.60	33.93	37.58	42.29	48.03	54.18
107.5	56.45	52.78	47.72	44.49	42.02	43.25	46.62	51.13	56.81	62.91
110.0	66.16	61.08	57.62	54.00	51.44	52.58	55.66	59.96	65.54	71.60
112.5	75.82	69.47	67.55	63.50	60.86	61.92	64.69	68.78	74.22	80.25
115.0	85.45	78.09	77.50	73.00	70.27	71.26	73.73	77.59	82.84	88.86
117.5	95.15	86.82	87.43	82.49	79.69	80.61	82.78	86.40	91.46	97.43
120.0	106.9	97.44	97.68	92.07	89.11	90.02	91.96	95.79	101.0	107.1
122.5	119.8	111.5	109.0	104.1	100.5	100.6	101.9	106.3	111.2	117.0
125.0	132.7	125.4	122.1	116.0	111.8	111.3	111.6	116.9	121.5	126.9
127.5	145.7	139.1	134.3	127.9	123.1	122.2	121.4	127.4	131.8	136.8
130.0	158.4	152.8	146.6	139.8	134.5	132.9	131.5	138.1	142.2	146.8
132.5	171.4	166.3	159.1	151.8	145.8	143.7	141.8	148.8	152.6	156.8
135.0	183.4	178.2	171.3	163.7	157.2	154.6	152.3	158.9	162.5	166.4
137.5	194.0	189.0	181.6	174.8	167.9	165.8	162.2	168.3	171.7	176.2
140.0	204.4	199.4	191.8	186.0	178.7	177.0	172.8	176.1	180.4	186.1
142.5	215.0	209.8	201.8	197.0	189.5	188.3	184.2	183.5	188.6	196.2
145.0	226.2	220.1	212.0	207.7	200.2	199.6	195.7	190.0	197.7	205.3
147.5	237.3	230.0	222.4	218.3	211.0	210.9	207.2	195.5	207.6	212.4
150.0	245.8	237.7	232.6	228.6	221.7	221.9	218.4	208.1	215.3	217.2
152.5	251.3	243.1	240.1	235.6	229.3	228.3	226.5	220.3	216.7	223.5
155.0	255.4	249.5	247.5	242.7	236.8	234.6	234.9	231.0	218.5	230.0
157.5	259.9	256.4	254.6	249.8	244.3	240.9	242.7	240.0	229.9	230.1
160.0	265.5	263.8	261.4	256.9	251.9	247.7	249.4	247.5	245.5	231.6
162.5	272.4	270.9	268.2	264.0	259.4	254.8	255.5	256.5	255.6	248.7
165.0	277.5	276.4	274.2	271.0	266.9	262.1	260.8	264.0	260.8	259.1
167.5	277.9	276.6	275.4	273.2	270.2	266.5	263.1	265.0	265.7	262.5
170.0	278.0	277.5	276.9	275.5	273.5	270.8	267.5	267.0	268.0	268.1
172.5	279.1	279.4	278.9	278.0	276.9	274.9	272.7	270.3	270.2	270.5
175.0	281.6	281.5	281.3	280.7	280.2	279.0	277.8	276.4	274.8	273.7
177.5	284.3	284.1	283.9	283.7	283.5	282.9	282.4	281.9	281.5	281.0
180.0	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8

C角度范围： 0度 - 360度

C角度间隔： 5.0度

测试速度：快速

环境温度：25.3℃

测试人员：

测试日期：2024-01-10

γ角度范围： 0度 - 180度

γ角度间隔： 0.5度

测试系统：远方(EVERFINE)G0-2000B_V1系统 V2.0.291

环境湿度：65.0%

测试距离：8.190米 [K=1.0000]

备注：

Photometric Data Table [cd]

G/C	300.0	305.0	310.0	315.0	320.0	325.0	330.0	335.0	340.0	345.0
0.0	1169	1169	1169	1169	1169	1169	1169	1169	1169	1169
2.5	1161	1161	1161	1162	1162	1162	1163	1163	1164	1164
5.0	1152	1153	1153	1153	1154	1154	1155	1156	1157	1158
7.5	1143	1143	1144	1144	1144	1145	1145	1146	1147	1148
10.0	1134	1133	1133	1133	1133	1133	1133	1134	1135	1136
12.5	1124	1123	1122	1121	1120	1119	1119	1120	1121	1122
15.0	1113	1111	1109	1107	1106	1105	1104	1104	1104	1105
17.5	1100	1099	1096	1093	1090	1088	1086	1085	1085	1086
20.0	1075	1076	1078	1077	1073	1070	1067	1065	1064	1065
22.5	1049	1050	1051	1053	1056	1051	1046	1043	1042	1041
25.0	1023	1023	1023	1024	1027	1030	1024	1020	1017	1016
27.5	996.5	995.3	994.8	994.9	996.2	998.6	1001	994.8	990.6	988.6
30.0	969.8	967.6	965.8	964.8	964.7	966.3	969.5	968.2	962.7	959.3
32.5	942.7	939.5	936.4	934.0	932.8	933.0	935.3	939.6	932.9	928.5
35.0	910.1	911.0	906.6	902.8	900.1	899.0	899.7	903.0	901.7	895.9
37.5	872.3	872.9	874.6	871.2	866.9	864.0	863.3	865.3	869.4	861.9
40.0	834.3	834.1	834.6	836.4	833.0	828.5	826.1	826.7	831.2	826.9
42.5	796.4	795.1	794.5	794.9	797.1	792.5	788.4	787.3	790.4	790.3
45.0	758.5	756.1	754.3	753.6	754.1	756.4	750.2	747.4	748.7	753.0
47.5	720.7	717.3	714.2	712.0	711.3	712.6	711.8	707.0	706.4	711.3
50.0	679.8	678.3	674.2	670.7	668.4	668.2	670.5	666.2	663.6	666.7
52.5	633.4	633.5	634.5	629.7	625.9	623.8	624.3	625.1	620.3	621.3
55.0	587.1	586.6	586.8	588.1	583.8	579.9	578.5	580.8	576.7	575.7
57.5	541.1	539.8	539.3	539.5	541.1	536.3	533.0	533.0	533.2	529.8
60.0	495.3	493.5	492.1	491.4	491.9	493.4	488.0	485.8	488.3	483.8
62.5	449.8	447.4	445.5	444.0	443.3	443.8	443.7	439.5	439.2	437.8
65.0	402.3	401.4	399.2	396.9	395.5	395.0	396.1	394.0	391.3	392.6
67.5	353.7	353.0	351.9	350.6	348.5	347.1	347.0	348.8	344.6	344.8
70.0	305.5	304.8	304.0	303.2	302.1	300.3	299.2	299.6	299.9	296.0
72.5	257.5	257.2	256.7	256.1	255.2	254.3	252.9	252.3	252.2	249.9
75.0	209.9	210.0	210.0	209.8	209.4	208.8	207.9	206.9	205.6	206.3
77.5	165.7	163.2	163.8	164.3	164.6	164.5	164.1	163.5	161.6	161.7
80.0	132.6	129.9	126.8	123.3	120.5	121.3	121.7	121.7	120.2	119.5
82.5	99.59	97.56	95.17	92.48	89.30	85.62	81.21	81.51	81.33	80.75
85.0	66.74	65.38	63.77	62.01	59.84	57.29	54.21	50.48	45.76	45.20
87.5	33.98	33.33	32.56	31.79	30.71	29.43	27.86	25.95	23.44	20.11
90.0	1.260	1.344	1.438	1.693	1.755	1.811	1.853	1.937	1.937	1.937
92.5	11.34	10.95	10.18	9.293	7.997	6.607	5.214	3.730	2.467	1.941
95.0	21.38	20.59	18.99	16.98	14.36	11.56	8.758	5.753	3.182	3.943
97.5	31.35	30.32	27.92	24.87	20.98	16.84	12.66	11.25	10.57	9.737
100.0	41.23	40.16	37.05	33.06	28.78	26.49	23.90	21.78	19.60	18.26
102.5	50.98	50.20	47.61	46.18	45.34	40.83	36.28	33.20	30.73	29.21
105.0	59.95	60.73	60.14	60.93	62.28	56.25	49.77	47.18	44.04	41.83
107.5	68.67	71.01	72.30	75.24	78.61	72.96	66.80	65.17	60.24	56.88
110.0	77.35	80.99	84.03	88.96	94.49	89.35	85.07	86.92	80.24	76.48
112.5	85.99	90.62	95.21	101.5	104.9	104.2	102.1	107.9	100.4	102.4
115.0	94.59	99.89	105.1	110.1	114.1	116.8	117.4	119.5	118.0	120.0
117.5	103.4	109.1	114.1	118.8	123.1	126.7	129.5	130.0	130.9	130.9
120.0	112.9	118.3	123.2	127.7	132.1	136.1	138.3	140.0	142.1	141.7
122.5	122.5	127.6	132.4	136.7	141.0	144.0	146.8	149.4	151.5	151.7
125.0	132.1	137.0	141.7	146.0	149.3	152.3	155.3	158.5	159.6	160.9
127.5	141.8	146.5	151.0	154.5	157.7	160.7	163.8	166.6	167.5	169.3
130.0	151.5	155.9	159.5	163.0	166.2	169.5	172.6	174.0	175.3	177.3
132.5	160.9	164.8	168.1	171.6	175.0	178.4	180.7	181.6	183.2	185.6
135.0	170.1	173.8	177.1	180.3	183.7	187.2	188.2	189.4	191.2	193.5
137.5	179.6	183.1	186.2	189.2	192.6	194.2	195.5	197.2	199.3	200.6
140.0	189.3	192.4	195.6	198.6	200.1	201.3	202.8	204.7	207.3	207.6
142.5	199.1	202.1	205.2	208.6	207.6	208.7	210.2	212.3	214.5	214.2
145.0	209.1	211.7	212.8	214.1	215.3	216.5	218.1	219.9	221.1	220.8
147.5	217.5	219.1	220.3	221.6	223.0	224.5	226.1	228.3	227.6	227.3
150.0	222.6	225.9	227.8	229.2	230.9	232.5	234.5	235.0	234.4	234.4
152.5	228.2	230.4	235.1	236.9	238.6	240.6	242.0	241.5	241.3	241.5
155.0	234.1	235.5	238.7	244.2	246.4	248.3	247.8	247.6	247.6	248.0
157.5	238.9	243.9	242.7	246.3	253.1	252.9	252.6	252.6	253.2	254.0
160.0	242.1	248.4	253.0	249.5	249.6	253.7	255.8	256.1	256.8	257.6
162.5	238.7	249.9	254.3	257.0	255.6	253.2	253.9	256.6	258.3	259.4
165.0	249.3	242.5	250.6	257.2	259.5	260.4	260.1	258.8	258.4	259.5
167.5	259.3	252.8	243.6	247.9	255.6	261.8	263.8	264.9	265.3	265.6
170.0	265.5	262.3	257.7	252.3	248.2	247.7	252.2	256.8	261.4	265.2
172.5	271.0	270.3	268.6	266.2	263.3	260.0	256.4	253.0	250.4	249.9
175.0	273.6	273.4	273.5	273.8	274.0	273.9	273.3	272.8	272.5	272.4
177.5	280.3	279.7	279.1	278.7	278.3	278.1	278.1	278.1	278.2	278.3
180.0	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8	286.8

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2024-01-10

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度: 65.0%
测试距离: 8.190米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	350.0	355.0
0.0	1169	1169
2.5	1165	1166
5.0	1159	1160
7.5	1150	1151
10.0	1138	1140
12.5	1124	1126
15.0	1107	1110
17.5	1088	1091
20.0	1066	1069
22.5	1043	1046
25.0	1017	1020
27.5	988.9	991.5
30.0	958.9	961.4
32.5	927.1	929.2
35.0	893.7	895.4
37.5	858.9	860.0
40.0	822.5	822.8
42.5	784.6	784.4
45.0	745.6	744.5
47.5	705.3	703.3
50.0	664.1	660.8
52.5	621.9	617.4
55.0	579.3	573.2
57.5	534.9	528.3
60.0	486.6	482.3
62.5	438.1	436.1
65.0	390.1	389.5
67.5	342.4	343.2
70.0	295.9	297.4
72.5	250.6	250.3
75.0	205.0	203.9
77.5	160.7	159.5
80.0	120.5	118.0
82.5	80.37	79.40
85.0	44.88	45.04
87.5	15.30	14.69
90.0	1.961	1.961
92.5	1.760	1.809
95.0	3.026	2.721
97.5	8.747	8.521
100.0	17.60	17.04
102.5	27.68	27.24
105.0	39.95	39.43
107.5	54.28	54.05
110.0	73.57	73.15
112.5	98.09	96.90
115.0	118.3	119.4
117.5	131.2	130.8
120.0	142.7	141.7
122.5	153.7	152.8
125.0	162.6	162.3
127.5	170.6	170.7
130.0	178.1	178.6
132.5	185.5	186.1
135.0	193.0	193.8
137.5	200.5	201.3
140.0	207.7	208.6
142.5	214.7	215.8
145.0	221.3	222.4
147.5	227.9	229.2
150.0	235.0	236.4
152.5	242.2	243.5
155.0	248.9	250.2
157.5	255.0	256.4
160.0	258.6	259.8
162.5	260.2	261.1
165.0	260.8	262.2
167.5	265.9	266.5
170.0	268.3	270.7
172.5	249.7	249.7
175.0	272.4	272.5
177.5	278.5	278.7
180.0	286.8	286.8

C角度范围： 0度 - 360度
C角度间隔： 5.0度
测试速度：快速
环境温度:25.3℃
测试人员：
测试日期:2024-01-10

γ角度范围： 0度 - 180度
γ角度间隔： 0.5度
测试系统：远方(EVERFINE)G0-2000B_V1系统 V2.0.291
环境湿度:65.0%
测试距离:8.190米 [K=1.0000]
备注：