

ELT

Project Name:	
Type:	



APPLICATION

This recessed, low-profile designed with an acrylic lens, high performance luminaire provides general illumination. Its high efficiency, great performance and value make it an ideal choice for commercial and institutional environments.

FEATURES:

- 100% acrylic, clear prismatic, pattern #12 with minimum 0.1" thickness A12 lens as standard.
- Die formed, cold-rolled, heavy gauge steel housing construction provides durability and strength.
- Standard steel door frame allows easy lens replacement without tool. Unique door frame design delivers a premium extruded appearance. Smooth edges for easy handling. Powder-painted, door steel latches provide easy, secure door closure.
- Painted parts finished with high-gloss baked white enamel over rust inhibiting phosphate coating.
- PAF (Painted After Fabrication) finish is standard for corrosion resistance and efficiency.

MOUNTING:

- Recessed ceiling mount.
- Compatible with most ceiling types.
- Field installed flange kit. (available as option)

LED:

- High quality array LEDs.
- LM80
- Color Temperature: 2700/3000/3500/4000/5000 (K)
- Color Rendering Index: > 80
- Calculated L70: 122,000 hours
- Reported L70: +60,000 hours

ELECTRICAL:

- High power factor electronic driver, operate from a 120 ~ 277 Vac input range, 50 / 60 Hz.
- Features included over voltage protection, surge, short circuit protection and over load protection.
- Power Factor: typical > 0.95, THD <20, meets Class1 or Class 2 circuit.
- Generic : 0-10V 10% dim. (GR)
- Minimum starting temperature: -4°F (-20°C) ~ 122°F (50°C).
- <ELCU-200>
- Guarantees emergency lighting remains ON or is turned on when power to the control device is lost.
- Interfaces with fire alarm panel or security system.
- "Watchdog" feature allows emergency loads to be controlled in tandem with normal power loads.
- UL listed for use in emergency circuits.

LISTING:

- ROHS.
- UL/CUL listed and labeled.
- Listed to UL 1598 and UL 8750.
- Recessed Luminaires, Type IC
- DLC listed. ⁶
- Suitable for damp locations.
- CEC Compliant EM (please contact for more information)
- 5 years limited warranty.
- 7 or 10 years limited warranty. (optional) ⁷
- ARRA compliant (optional).
- BAA compliant (optional).
- Trade Agreements Act compliant (optional).
- LM-79 (DLC listed products only)
- Bluetooth Mesh System available, please contact factory for more information.

CONFIGURATIONS

Series	Size	LED	AC Input	Lumen Output (4000K)	Lumen Efficiency (4000K)
ELT-2G	1' x 4'	27LED	28.5W	3537 lm	124.10 lm/W
		36LED	39.33W	4361.57 lm	110.90 lm/W
		44LED	46.71W	5584.36 lm	119.55 lm/W
		54LED	57.33W	6404.25 lm	111.71 lm/W
		72LED	78.66W	9339.55 lm	118.73 lm/W
		108LED	114.66W	13713.58 lm	119.60 lm/W
	2' x 2'	27LED	29.76W	3598.15 lm	121.27 lm/W
		36LED	39.22W	4536.36 lm	115.66 lm/W
		44LED	46.84W	5384.59 lm	114.96 lm/W
		54LED	57.49W	6608.91 lm	114.96 lm/W
		72LED	78.44W	9072.71 lm	115.66 lm/W
		108LED	114.98W	13216.80 lm	114.95 lm/W
		174LED	174.0W	20000 lm	114.94 lm/W
	2' x 4'	36LED	39.58W	4850.41 lm	122.55 lm/W
		44LED	47.08W	5798.86 lm	123.17 lm/W
		54LED	57.79W	7134.53 lm	123.46 lm/W
		72LED	75.50W	9238.20 lm	122.36 lm/W
		108LED	108.0W	13088.52 lm	121.19 lm/W
		174LED	174.0W	21087 lm	121.19 lm/W
		205LED	205.0W	24844 lm	121.19 lm/W
	248LED	240.0W	29109 lm	121.19 lm/W	

CCT	Multiplier		
	3000K	3500K	5000K
1X4	0.9502	0.9837	1.0173
2X2	0.9891	0.9951	1.0119
2X4	0.9809	0.9980	1.0030

ORDERING INFORMATION

EXAMPLE: ELT22-2G-36LED-40K-UNV-GR

MODEL		LED		COLOR TEMP.		EFFICACY		CRI	
ELT14-2G	1' x 4'	27LED	27W LED	-27K -30K -35K -40K -50K	2700K ⁹ 3000K 3500K 4000K (Std.) 5000K	(Blank) HE	Standard High Efficacy 	(Blank) C9	80+ CRI 90+ CRI ¹⁰
		36LED	36W LED						
		44LED	44W LED						
		54LED	54W LED						
	72LED	72W LED							
	108LED	108W LED							
	2' x 2'	27LED	27W LED						
		36LED	36W LED						
		44LED	44W LED						
		54LED	54W LED						
		72LED	72W LED						
		108LED	108W LED						
		174LED	174W LED						
	2' x 4'	36LED	36W LED						
		44LED	44W LED						
		54LED	54W LED						
		72LED	72W LED						
		108LED	108W LED						
		174LED	174W LED ^{11,12}						
		205LED	205W LED ^{11,12}						
		248LED	248W LED ^{11,12}						
		xx	Custom lumen or watt: ^{11,12} ____ LM or ____ W						

DOOR FRAME		TRIM TYPE		DIFFUSER		VOLTAGE	
(Blank)	Flush Steel, White	(Blank)	Grid	(Blank)	Pattern #12 Acrylic Lens 0.1"	UNV	120-277V
SB	Flush Steel, Black	FK	Flange ¹	A12125	Pattern #12 Acrylic Lens 0.125" Thick	120	120V
FB	Flush Aluminum, Black	FTSH	Flanged Trim ²	P12125	Pattern #12 Polycarbonate Lens 0.125" Thick	277	277V
FN	Flush Aluminum, Natural			WA125	Lumieo white acrylic lens 0.125" Thick ¹⁸	347	347V
FW	Flush Aluminum, White			A19	Pattern #19 Acrylic Lens 0.156" Thick	480	480V ³
RB	Regressed Aluminum, Black			P1	5/8"x5/8"x7/16" Deep Specular Plastic Louver		
RN	Regressed Aluminum, Natural			FR	Frosted Acrylic Lens, Pattern#12 0.100" thick		
RW	Regressed Aluminum, White			FR12	Frosted Acrylic Lens, Pattern#12 0.125" thick		
AMB	Anti-Microbial Coating (Matte Skye White)			P5OL	3/4" x 3/4" x 3/8" Deep Specular Plastic Louver with overlay		


LED DRIVER ⁸		OPTIONS	
GR	Generic, 0-10V 10% dim (Std.)	EMG8	1296 LUMEN EM Battery Backup (CEC Compliant EM) ^{4,5}
DM1	Generic 0-10V 1% dim	EMG15	2430 LUMEN EM Battery Backup (CEC Compliant EM) ^{4,5}
SD40	40% / 100% Bi-Level Step dim	EMG20	3240 LUMEN EM Battery Backup (CEC Compliant EM) ^{4,5}
SDXX	XX% / 100% Bi-Level Step dim (Specify XX : 10%~70%)	EMG25	4050 LUMEN EM Battery Backup (CEC Compliant EM) ^{4,5}
TDM	Triac Dim. (120V only)	ELCU-200	Fail-to-on Emergency lighting, UL924 ¹³
TD30/70	30% / 70% / 100% Tri-Level Step dim	GTD	Bodine Generator Transfer Device
TDXX/YY	XX% / YY% / 100% Tri-Level Step dim (Specify XX, YY : 10% ~ 70%)	GTD10DIM	Bodine Generator Transfer Device (0-10VDC Dimmer Override)
ES566	eldoLED SOLoDrive Natural Dimming to dark, 0-10V, 100% ~ 0.1% dim	ARRA	Assembled in USA
LDE1	Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology, 100% ~ 1% dim	BAA	BAA(Buy American Act) compliant
ELV	ELV compatible (reverse-phase or trailing-edge), (120V only)	BABA	BABA(Build America Buy America) compliant
PHSR	Philips Xitanium Sensor-Ready, Dali 5%~100% dim	TAA	Trade Agreements Act compliant
PHDL	Philips Xitanium DALI driver, Dim to 5%	AB	Two Ballast for AB Switch
ED560	eldoLED LightShape DALI dim to dark, 0.1% ~ 100%	MS11	Master Slave w/ 11' Whip
BLT	Bluetooth Mesh System (contact factory for more information)	WT	Wet Location ¹⁶
		PW6	Pre-wired 6' Whip Flex
		ADPMS	Bluetooth Mesh Wireless Sensor. Occupancy/Daylight/0-10V Dimming ^{19,20}
		O7W	Optional 7 Years Limited Warranty ⁷
		O10W	Optional 10 Years Limited Warranty ⁷
		GS1	Single Gasketing
		GS2	Double Gasketing
		GS3	Triple Gasketing
		LMS-109	Line Voltage integrated microwave Sensor
		HC403	Microwave bi-level Occupancy Sensor, adjustable via DIP switch ¹⁷
		WG	Wireguard
		GS1	Single Gasketing (Door to Housing)
		GS2	Double Gasketing (GS1 and Lens to Door)
		GS3	Triple Gasketing (GS2 and Housing to Ceiling)

ELT

LIGHTING CONTROL SYSTEM	
LUTRON VIVE	<Lutron Vive System Enabled>  Click Here!
SNS200C RS-IR	<EasySense> EasySense Ceiling-mount occupancy sensing, daylight harvesting and task tuning in one device (Must be ordered with PHSR driver) ^{14, 15} IR dongle v2.0 for EasySense control
IFS105SE	<Bluetooth> Bluetooth Mesh Wireless Sensor. Occupancy/Daylight/0-10V Dimming
PPA102S	Bluetooth Powerpack (Consult factory for installation location)
CASAMBI	Contact factory for CASAMBI READY options

NOTES:

1. Flange kits are supplied in separate boxes, field installed.
2. Flanged trims are supplied with swing gate hanger.
3. Supplied with step down transformer.
4. Contact factory for other emergency ballast options.
5. Must specify voltage, not available with 347V, 480V.
6. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
7. This limited warranty covers electrical parts only and does not apply to labor, equipment lease, or defect from improper installation or operation. (EM battery backup does not included)
8. To find an approved dimmer switch, please see table 1.
9. Available with C9 only.
10. Lumen per watt is approximately 15% fewer than standard CRI (80+).
11. Not DLC qualified.
12. Max lumen or watt per size:
1x4: 13,713lm or 114W
2x2: 20,000lm or 174W
2x4: 29,085lm or 240W
13. Shipped separately.
14. See NFC and IR manual in the separate attachment. If your phone is not compatible, please order "RS-IR" and follow the manual.
15. Refer to Advanced Grouping Datasheet for its default setting and compatible wireless switches.
16. Closed cell gasket between housing and door frame, and between lens and door frame (additional gasket between housing and ceiling grid available with GS3 options). FW door and Grid Ceiling only.
17. Refer to Table2 to find the factory default setting.
18. 21% light less compared to pattern#12 acrylic lens.
19. Only available with standard 0-10V LED driver.
20. Default setting from the factory is "occupancy enabled, Daylight disabled". To enable Daylight, disable occupancy and enable daylight adjustment must be made in the field prior to installation.

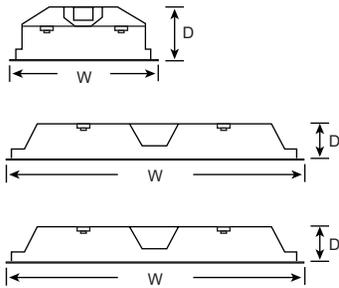

Specifications: 1'x4'

Length: 47-3/4 (1213)
Width: 11-15/16 (303)
Depth: 4-1/2 (115)
Weight: 16.16 lbs (7.33 kg)

Specifications: 2'x2'


Length: 23-3/4 (603)
Width: 23-15/16 (608)
Depth: 3-1/2 (88.9)
Weight: 13.07 lbs (5.93 kg)

Specifications: 2'x4'


Length: 47-3/4 (1213)
Width: 23-15/16 (608)
Depth: 3-1/2 (88.9)
Weight: 21.01 lbs (9.53 kg)

All dimensions are in inches (millimeters).

SIDE VIEW

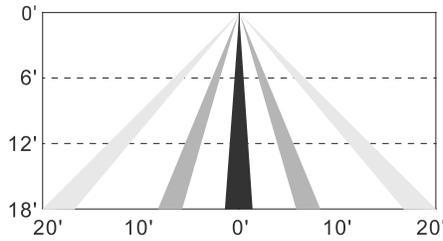

TOP VIEW

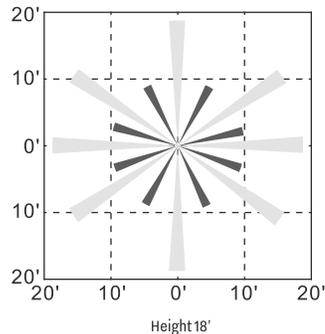

ADPMS, IFS105SE coverage pattern

COMPATIBLE DIMMER SWITCH (TABLE 1)

Model #	Brand	Compatible Dimmer Switch	
(Blank)	-	<Leviton>	IllumaTech IP7 series
		<Lutron>	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver.
		<Philips>	Sunrise : SR1200ZTUNV
ES566	eldoLED SOLOdrive	<Busch-Jaeger>	2112U-101
		<Jung>	240-10
		<Leviton>	IllumaTech - IP710-DLX
		<Lightoller Controls>	ZP600FAM120
		<Merten>	5729
		<Pass & Seymour>	CD4FB-W
		<Wattstopper>	DCLV1
		<Sensor Switch>	nIO EZ
		<Synergy>	ISD BC
		<ABB>	SD/S 2.16.1
		<Lutron>	Nova T: NTFTV Diva - DVTV-xx, NFTV GRAFIK Eye: GRX-TVI w GRX3503 Energy Savr Node: QSN-4T16-S TVM2 Module
		<Crestron>	GLX-DIMFLV8, GLXP-DIMFLV8, GLPAC-DIMFLV4-*, GLPAC-DIMFLVV8-*, GLPP-DIMFLVEX-PM, GLPP-1DIMFLV2EX-PM, GLPP-1DIMFLV3EX-PM, DIN-A08, DIN-4DIMFLV4, CLS-EXP-DIMFLV, CLCI-1DIMFLV2EX
		ED560	eldoLED DUALdrive
LDE1	Lutron 5-Series EcoSystem	<Lutron>	PowPak Dimming Modules: RMJ-ECO32-DV-B, FCJ/FCJS-ECO ^{1,2} Energi Savr Node (120V only): QSN-1ECO-S, QSN-2ECO-S GRAFIK Eye QS/Homeworks QS control unit (120V only): QSGRJ- _E(wireless) QSGR- _E Quantum Hub (120V only): QP2- _2C/4C/6C/8C Homeworks QS/myRoom Plus power module (120V only): LQSE-2ECO-D
PHSR ³	Philips Xitanium Sensor-Ready	<Illumra>	<u>Single Rocker Self-Powered Light Switch (on/off, dim-up/down)</u> Illumra# ZBT-S1AWH Digi-Key# 1082-1033-ND <u>Dual Rocker Self-Powered Light Switch (on/off, dim-up/down, scene1,2)</u> Illumra# ZBT-S2AWH Digi-Key# 1082-1034-ND
TDM	KEYSTONE	<Lutron>	Diva DV-600P, SkyLark S-600P, Ariadni AY-600P, Ariadni TG-603P, Maestro MA-600 (Digital), Diva CFL/LED DVCL-153P, Satin Colors DVSC-600P-SW
		<Leviton>	6641, IllumaTech IPI06-1LX, ToggleTouch TGI06-1LW (Digital)
ELV	KEYSTONE	<Lutron>	MAELV-600BL (Digital), DVELV-300P, SkyLark SELV-300P

NOTES:

- All devices connected to one FCJ/FCJS-ECO will be controlled together. Devices will dim to the same level as the result of a control command. For more detail on adjusting low-end light level refer to Application Note#556 at www.lutron.com.
- For the Line/Hot (L/H) terminal on the driver, it is preferred not to use the switched hot (red) wire from the control but rather the hot wire directly from the power source.
- Recommended for EasySense System.

HC403 FACTORY SETTING (TABLE 2)

Detection Area	100%
Hold-time	5 sec
Daylight sensor	Disable
Stand-by period (tri-level control)	10 sec
Stand-by dimming level	10%

* See a separate attachment to find more setting options.

OUTPUT CURRENT


		Bi-Level		Tri-Level (Default)	
SW1	SW2	Config Range	Default	Config Range	Default
Close	Open	10% - 70%	40%	10% - 70%	30%
Open	Close	10% - 70%	40%	10% - 70%	70%
Close	Close	100%	100%	100%	100%

CEILING OPENING


Series	Size	Width	Length
FK	1' x 2'	12-3/8"	24-3/8"
	1' x 4'	12-3/8"	48-3/8"
	2' x 2'	24-3/8"	24-3/8"
	2' x 4'	24-3/8"	48-3/8"
FTSH	1' x 4'	12-3/16"	48-3/4"
	2' x 2'	23-15/16"	24-7/8"
	2' x 4'	24-5/8"	48-3/4"

ELT


ELT14-2G-27LED

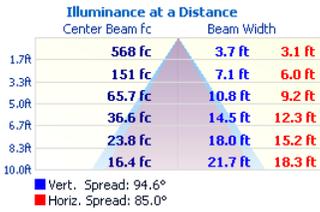


ELT14-2G-36LED

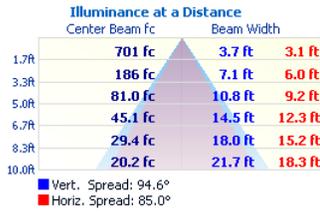


ELT14-2G-44LED

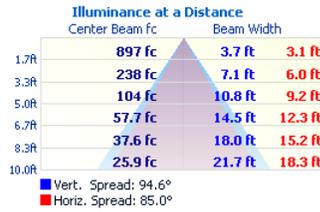

ELT14-2G-54LED

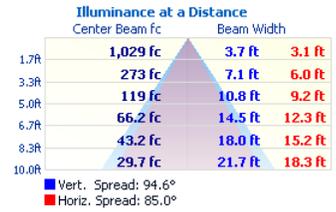


ELT14-2G-72LED

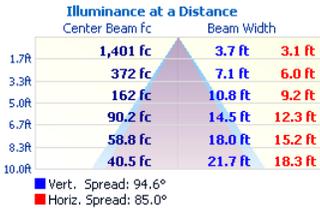


ELT14-2G-108LED




ELT22-2G-27LED

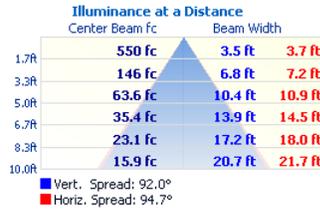


ELT22-2G-36LED

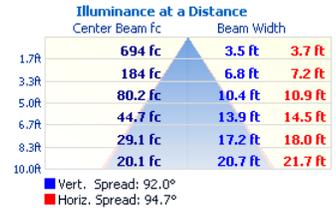


ELT22-2G-44LED

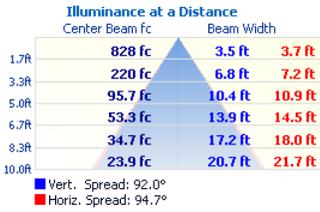


ELT22-2G-54LED

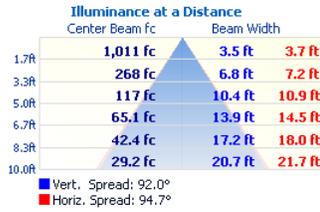


ELT22-2G-72LED

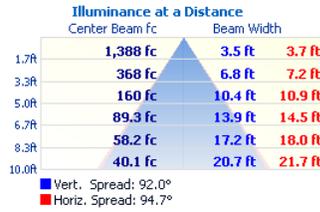

ELT22-2G-108LED

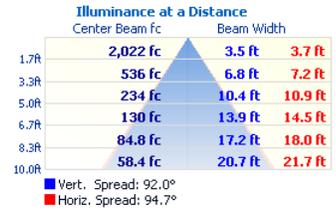


ELT24-2G-36LED

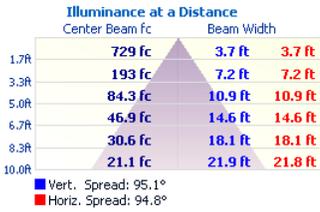


ELT24-2G-44LED



ELT24-2G-54LED

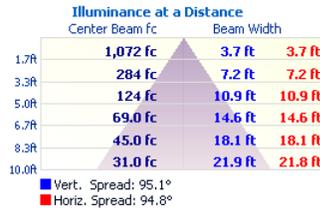

ELT24-2G-72LED

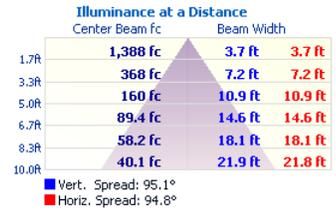

ELT24-2G-108LED

