

CAXTEU

## APPLICATION

The City of Chicago has specific rules regarding the construction and operation of its exit signs. Chicago exit signs have white color finish steel housing with a glass panel and red letters in the word "EXIT". The directional arrows must be below the word EXIT, as opposed to the left and right of the word. Chicago-approved exit signs must be approved by the Chicago Department of Buildings.



## FEATURES:

- 20-gauge steel housing.
- Neutral white finish.
- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- Single or double face configurations.

## MOUNTING:

- Mounting canopy included for top or end mount.
- Universal K/O pattern on backplate for wall mount.

## ELECTRICAL:


- Dual 120V/277V.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.

## BATTERY:

- 4.8V Long-life, maintenance-free, rechargeable Ni-Cd battery (EM models only).
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## LISTING:

- 5 year warranty on all electronics and housing. Battery pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA 70, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

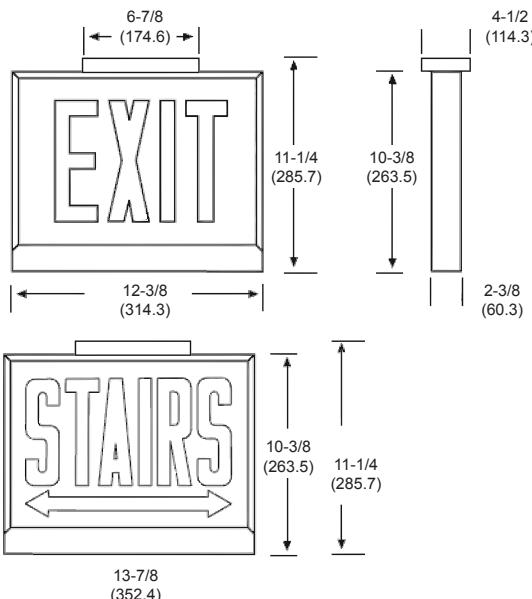

All dimensions are in inches (millimeters).


## ORDERING INFORMATION

EXAMPLE: CAXTEU-1-R-W-EM-NA

MODEL	# OF FACE	LETTER	HOUSING	BATTERY
CAXTEU	1 2	R	White Housing Black Housing	(Blank) EM
				AC Only Ni-Cd Battery

## DIRECTIONAL ARROWS

NA	Exit No Arrow
SWNA	Stairs No Arrow
DA	Exit Double Arrow
SWDA	Stairs Double Arrow
RA <sup>1</sup>	Exit Right Arrow
SWRA <sup>1</sup>	Stairs Right Arrow
LA <sup>1</sup>	Exit Left arrow
SWLA <sup>1</sup>	Stairs Left Arrow
LARA <sup>2</sup>	Exit Left/Right Arrow
SWLARA <sup>2</sup>	Stairs Left/Right Arrow

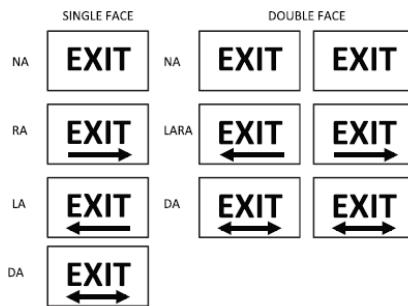

## NOTES:

1. Available in single face configuration only
2. Available in double face configuration only.

ELECTRICAL INFORMATION				
	Input Watts (W)		Input Amps (A)	
All Models	120V	277V	120V	277V
	5.0	5.0	0.10A	0.05A